



application
INFO
available

UCC1926

UCC2926

UCC3926

±20A Integrated Current Sensor

FEATURES

- Integral Non-inductive Current Sense Element with Internal Kelvin Connections
- 20A Current Rating
- Bi-directional, High Side or Low Side Sensing
- Internal Temperature Nulling Circuitry for Current Sense Element and Amplifier
- Logic Compatible Current Direction Status Output
- Low Offset, Chopper Stabilized Current Sense Amplifier
- Uncommitted Amplifier with User Programmable Gain
- Overcurrent Indication with User Programmable Threshold

DESCRIPTION


The UCC3926 Current Sensor IC contains a wideband, transimpedance amplifier for converting the current through an internal, non-inductive $1.3\text{m}\Omega$ shunt resistor into a proportional voltage. The sense element operates in both high-side (V_{DD} referenced) and low-side (GND referenced) applications.

The UCC3926 can measure currents up to $\pm 20\text{A}$. This transimpedance amplifier gain is precisely trimmed to $33.3\text{m}\Omega$ to convert a 15A input into a 500mV output signal. It has a very low input offset voltage from chopper-stabilization. A cross-switching block rectifies the input signal by forcing the differential output, AOP positive with respect to the other differential output, AON. SIGN indicates the polarity of the current.

The UCC3926 programmable amplifier provides three functions. It converts the differential transimpedance output signal into a single-ended signal. It has a user-controlled gain stage that sets the maximum current level to the desired voltage and it level shifts the zero current point to the desired level as well. A comparator then compares the output of the instrumentation amplifier to a user-set reference voltage on OCREF, which provides an overcurrent status bit OC.

The UCC3926 is available in the 16 pin SOIC package.

BLOCK DIAGRAM

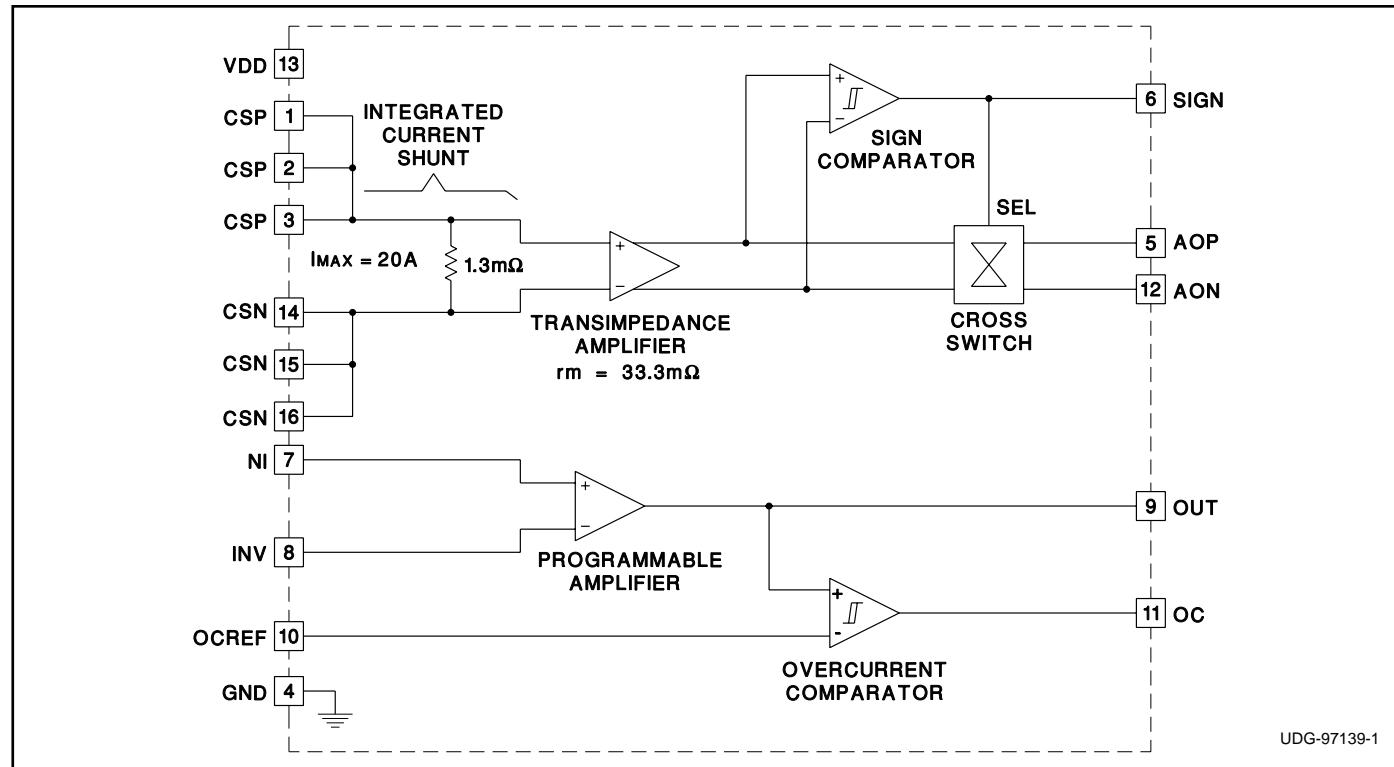


ABSOLUTE MAXIMUM RATINGS

Input Sense Current (I_{IN})	$\pm 20A$
Supply Voltage, VDD	14.5V
Inrush Current, 50 μ s	$\pm 100A$
Input Voltage Range (CSP, CSN)	-0.2V to 14.5V
CSP, CSN, Common Mode Range (referenced to GND)	$\pm 200mV$
CSP, CSN, Common Mode Range (referenced to VDD)	$\pm 200mV$
Shunt Resistance.	2.25m Ω
Storage Temperature	-65°C to 150°C
Junction Temperature.	-55°C to 150°C
Lead Temperature (Soldering, 10sec.)	300°C

Currents are positive into, negative out of the specified terminal. Consult Packaging Section of Databook for thermal limitations and considerations of packages.

ORDERING INFORMATION

	TEMPERATURE RANGE	PACKAGES
UCC1926	- 55°C to +125°C	DS
UCC2926	- 40°C to +85°C	DS
UCC3926	0°C to +70°C	DS

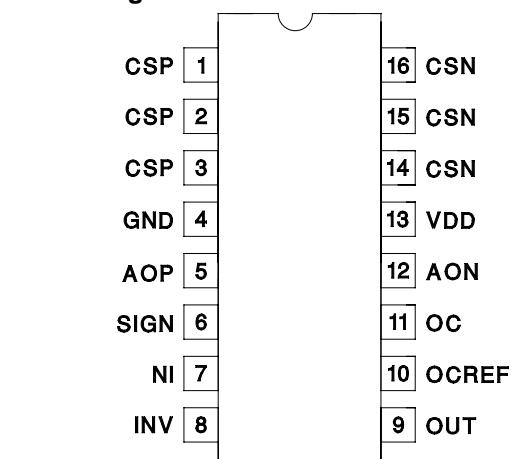CONNECTION DIAGRAM**SOIC-16 (Top View)****DS Package**

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these specifications apply for VDD = 4.8V; all temperature ranges and TA = TJ.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Supply Section					
VDD		4.8		14	V
I_{VDD}			3.8	6	mA
Transimpedance Amplifier Section					
AOP – AON	$I_{IN} = 15A$, VDD = 10V, 25°C	490	500	510	mV
	$I_{IN} = 15A$, VDD = 10V, 0°C to +70°C	480	500	520	mV
	$I_{IN} = 15A$, VDD = 10V, -40°C to +85°C	460	500	540	mV
	$I_{IN} = 15A$, VDD = 10V, -55°C to +125°C	410	500	590	mV
Quiescent Output Voltage (AOP, AON)	$I_{IN} = 0$		1.0		V
Quiescent Differential Voltage (AOP – AON)	$I_{IN} = 0$, Measure AC Peak to Peak		0	30	mV
Bandwidth	(Note 1)	20	40		MHz
Output Impedance			350	500	Ω
Shunt Resistance	CSP to CSN		1.3		m Ω
PSRR	VDD = 4.8V to 10V	45			dB
	VDD = 10V to 14V	25			dB
Temperature Coefficient	(Note 1)	-200		200	ppm/ $^{\circ}$ C
Sign Comparator Section					
V_{OH} , VDD – SIGN	CSP = 1A, $I_{SIGN} = -100\mu A$, CSN = 0V		0.2	0.4	V
V_{OL} , SIGN	CSP = -1A, $I_{SIGN} = 100\mu A$, CSN = 0V		0.2	0.4	V
I_{IH} Threshold	Ramp CSP, CSN = 0V		400	700	mA
I_{IL} Threshold	Ramp CSP, CSN = 0V		-400	-700	mA
Programmable Amplifier Section					
A_{VOL}		60	70		dB
GBW	At 200kHz	6	13		MHz
V_{IO}	$V_{IN} = 0.5V, 1.5V, 2.5V$	-9		9	mV

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these specifications apply for $V_{DD} = 4.8V$; all temperature ranges and $T_A = T_J$.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Programmable Amplifier Section (cont.)					
PSRR	$V_{DD} = 4.8V$ to $10V$	60			dB
	$V_{DD} = 10V$ to $14V$	60			dB
Common Mode Input Range		0.5		2.5	V
I_{IB} , Input Bias Current (N_I , INV)			-100	-350	nA
I_{IO} , Input Offset Current			20	350	nA
V_{OL}	$INV - NI = 20mV$, $IO = 0\mu A$		100	200	mV
	$INV - NI = 20mV$, $IO = 200\mu A$		150	300	mV
V_{OH}	$NI - INV = 20mV$, $IO = -200\mu A$, ($V_{DD} - OUT$)		1.2	2	V
V_{OH} , Clamp	$NI - INV = 20mV$, $V_{DD} = 14V$	6	7	8	V
I_{OL}	$OUT = 1.5V$	1	3.5		mA
I_{OH}	$OUT = 1.5V$	-250	-325		mA
Overcurrent Comparator Section					
OC Comp Threshold	$OCREF = 2V$	2.00		2.05	V
Common Mode Range	(Note 1)	0.1		$V_{DD} - 2$	V
Hysteresis		20	40	60	mV
V_{OL}	$(OCREF - OUT) = 100mV$, $IOC = 100\mu A$		0.2	0.4	V
V_{OH} , $V_{DD} - OC$	$(OUT - OCREF) = 100mV$, $IOC = -100\mu A$		0.2	0.4	V
Propagation Delay	$(OUT - OCREF) = \pm 100mV$		90	175	ns

Note 1: Guaranteed by design. Not 100% tested in production.

PIN DESCRIPTIONS

AOP: Positive output of the converted current signal. Voltage from AOP to AON is the absolute value of the transimpedance amplifier output. AOP may show some “chopping” noise. The differential to single-ended conversion removes the common-mode noise between AOP and AON. Some high frequency filtering of AOP to GND can reduce the fast transient spikes. The output stage of AOP is shown in Figure 1.

AON: Negative output of the converted current signal. Voltage from AOP to AON is the absolute value of the transimpedance amplifier output. AON may show some “chopping” noise. The differential to single-ended conversion removes the common-mode noise between AOP and AON. Some high frequency filtering of AON to GND can reduce the fast transient spikes. Note that AON is above GND voltage. The output stage of AON is shown in Figure 1.

CSN: Input connection to one end of the internal current sense shunt resistor. Nominal resistance from CSP to CSN is $1.3m\Omega$. The current shunt has a nominal temperature coefficient of $3530\text{ ppm}/^{\circ}\text{C}$. The temperature adjusted autozero gain is designed to cancel this temp co. effect. CSN may be referenced to GND for low side

sensing or to VDD for high side sensing. CSP – CSN may vary from $\pm 75mV$ from either GND or VDD. Current into CSN is defined as negative.

CSP: Input connection to the other end of the internal current sense shunt resistor. Nominal resistance from CSP to CSN is $1.3mW$. The current shunt has a nominal temperature coefficient of $3530\text{ ppm}/^{\circ}\text{C}$. The temperature adjusted autozero gain should cancel this temp co. effect. CSP may be referenced to GND for low side sensing or to VDD for high side sensing. CSP – CSN may vary from $\pm 75mV$ from either GND or VDD. Current into CSP is defined as positive.

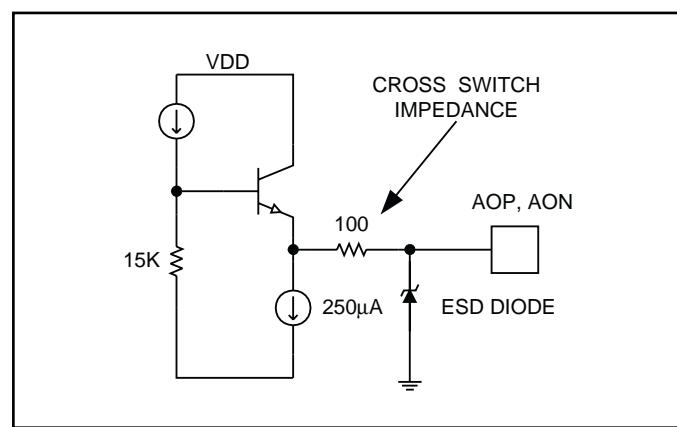


Figure 1. AOP and AON output stage.

PIN DESCRIPTIONS (cont.)

GND: This pin is the return point for all device currents.

INV: Negative input to the programmable amplifier to provide differential to single-ended signal conversion.

NI: Positive input to the programmable amplifier to provide differential to single-ended signal conversion.

OC: Overcurrent comparator output. When OUT is greater than OCREF, OC switches high. The OC comparator has a typical hysteresis of 25mV.

OCREF: The reference pin of overcurrent comparator for setting overcurrent threshold voltage.

OUT: Output of the programmable amplifier intended to provide differential to single-ended signal conversion of the transimpedance amplifier's outputs.

Use this opamp to establish overall gain and nominal zero current reference voltage. This amplifier may be configured with a gain of one or more. Any non-common mode "chopping" noise between AOP and AON will show up at OUT. Some filtering of OUT may improve the application's performance.

SIGN: Sign comparator output. SIGN also controls the analog switches in the cross-switching block to keep AOP greater than AON. At currents near zero amps, the sign comparator may switch from "chopping" noise from the transimpedance amplifier.

VDD: VDD is the power input connection for this device. Its input range is from 4.8V to 14V. Bypass to GND using good quality ceramic capacitors.

TYPICAL CHARACTERISTICS CURVES

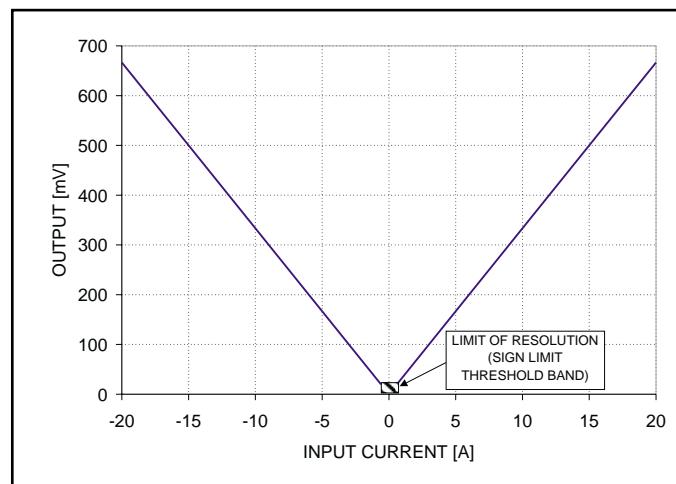


Figure 2. Differential output voltage (AOP-AON) vs. input current (I_{IN}).

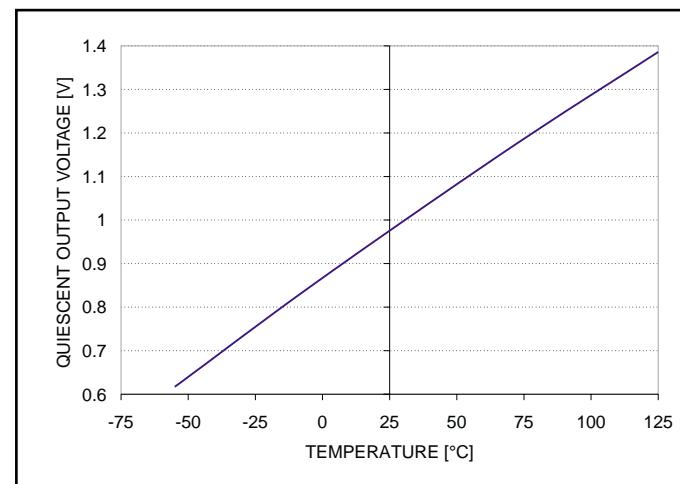


Figure 3. Quiescent AOP, AON output voltage vs. temperature.

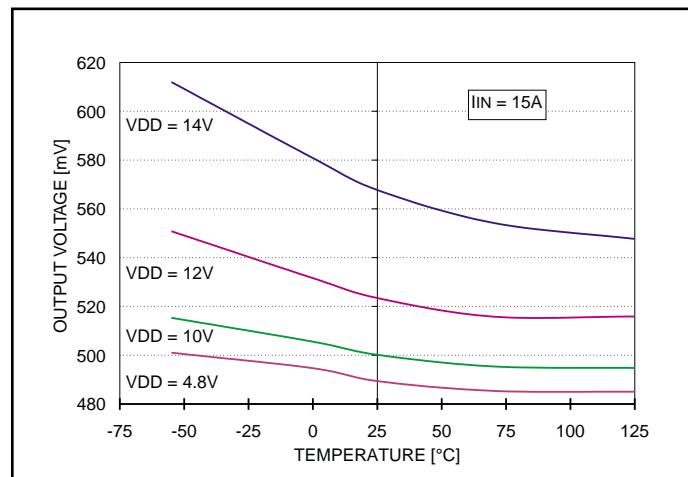


Figure 4. Differential output voltage (AOP - AON) vs. VDD and temperature.


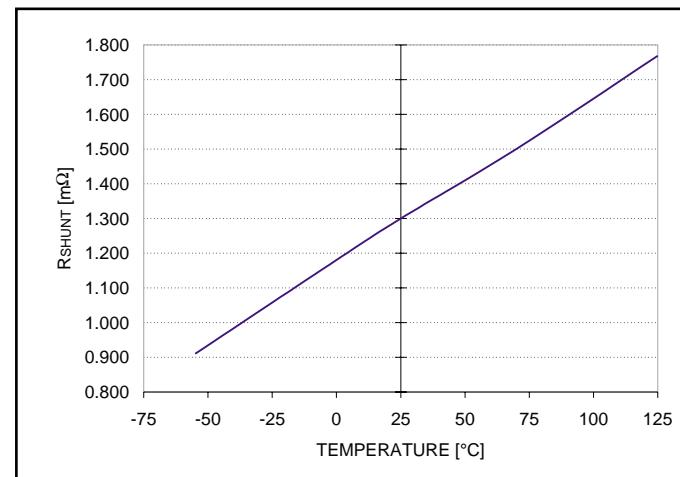


Figure 5. Typical shunt resistance vs. temperature.

LAB EVALUATION CIRCUIT

The circuit shown uses a pulse generator to switch currents while observing the analog voltage of the sensed current. A four position switch can be used to experiment

with different gain settings for the programmable amplifier. The OCREF voltage and the NI DC bias voltage can be adjusted with $1k\Omega$ potentiometers to offset the amplifier output and set the overcurrent comparator threshold.

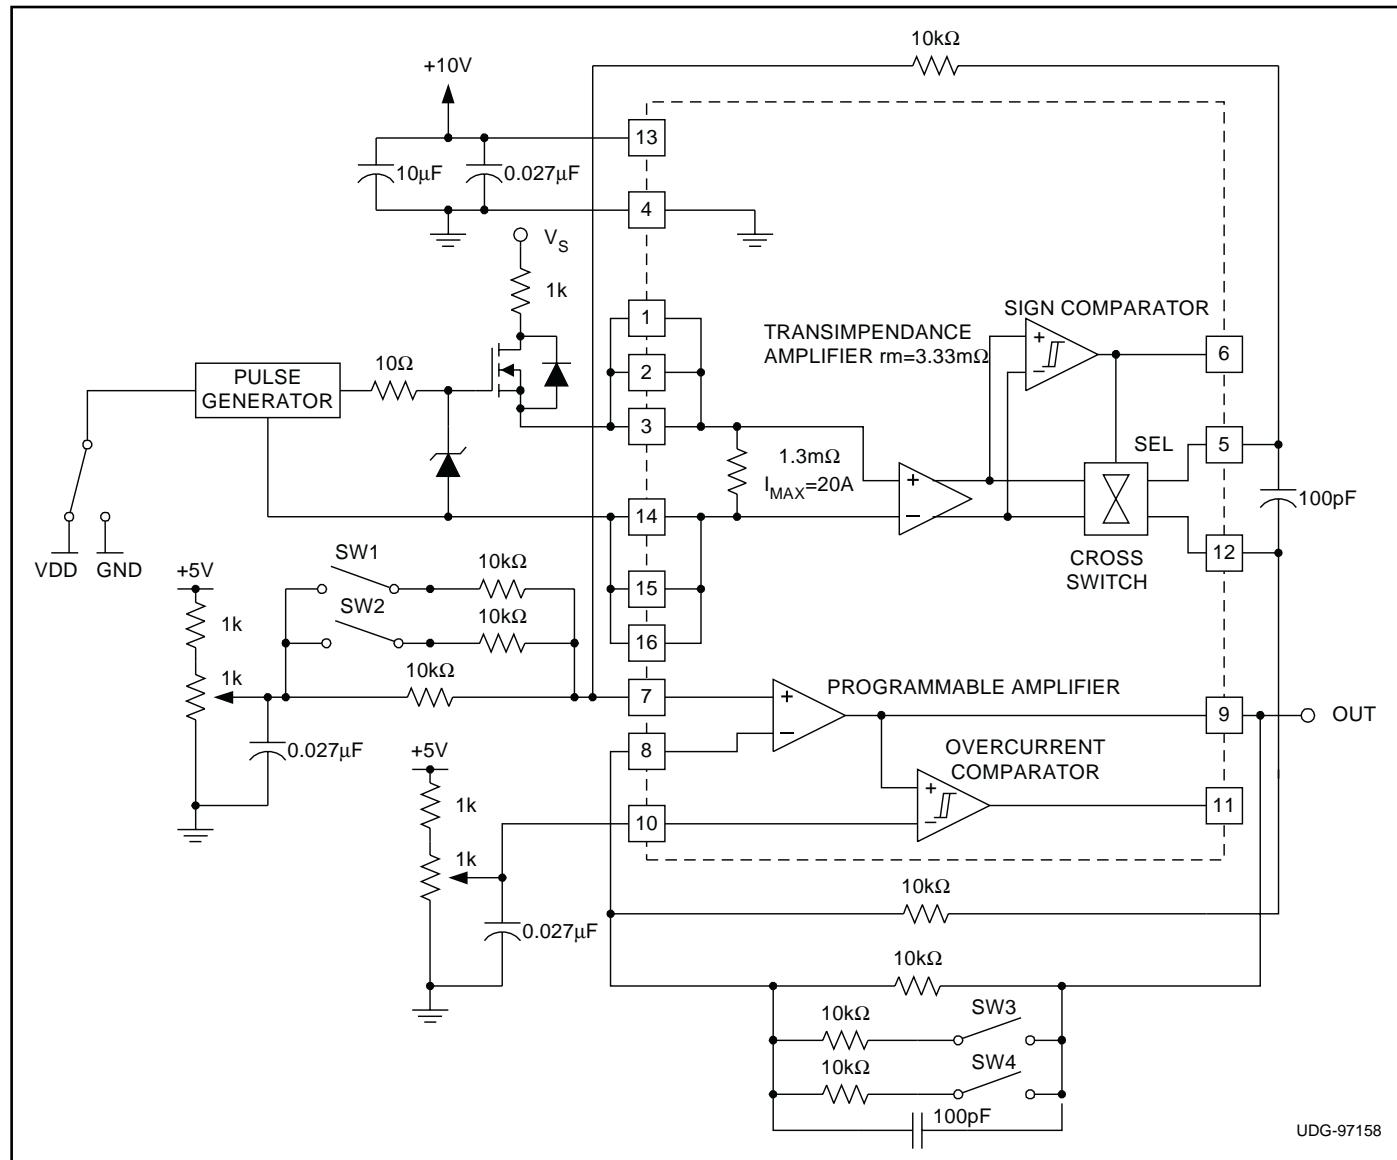

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 2000, Texas Instruments Incorporated

SUNSTAR商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分銷世界各大品牌IC芯片和電子元器件的连锁经营綜合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。**专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）www.SENSOR-IC.COM 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到 中国，共同开拓市场。**本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测计量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学的研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学的研究、产品设计、开发、生产制造的科技人员、管理人员 和采购人员提供满意服务。**我公司专业开发生产、代理、经销、销售各种传感器、变送器 敏感元器件、开关、执行器、仪器仪表、自动化控制系统：**专门从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子 元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网:<HTTP://www.rfoe.net/>

商斯达消费电子产品网:<http://www.icasic.com/>

商斯达军工产品网:<http://www.junpinic.com/>

商斯达实业科技产品网:<http://www.sunstars.cn/>传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382