



## NPP-301 Series Surface Mount Pressure Sensor

### DESCRIPTION

The NPP Series features silicon pressure sensors in surface mount packages. An ultra-small Silicon Fusion Bonded (SFB), ultra-high stability SenStable<sup>®</sup> piezoresistive chip from NovaSensor<sup>®</sup> is placed in a plastic package that exploits high volume, leadframe package technology to bring forth a low-cost sensor alternative to the OEM user.

With constant voltage excitation, the NPP-301 produces a voltage output that is linearly proportional to the input pressure. The user can provide NPP Series products with signal conditioning circuitry to amplify the output signal or to maximize OEM value added. The NPP Series is compatible with most noncorrosive gases and dry air.

### SCHEMATIC DIAGRAM

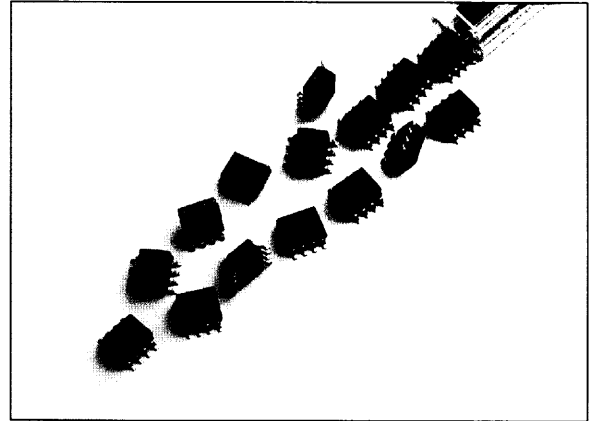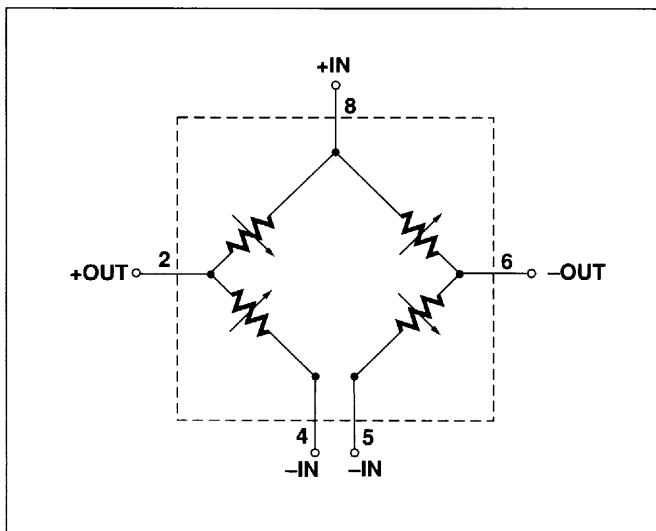

### FEATURES

- Low-cost surface mount package: SO-8
- Wide operating temperature range: -40 to +125°C
- Static accuracy < 0.20% FSO maximum
- Suitable for automated component assembly
- Four element Wheatstone bridge configuration for circuit design flexibility
- Solid-state reliability
- 100, 200 and 700 kPa absolute pressure ranges available

### APPLICATIONS

- Automotive Tire Pressure
- Pneumatic Controls
- Pressure Switches and Controllers
- Altimeters and Barometers
- Cable Leak Detection
- Consumer Appliances
- Portable Gages and Manometers

### HOW TO ORDER

Part Number:	Description:
NPP-301-100A	15 psia, SO-8
NPP-301-200A	30 psia, SO-8
NPP-301-700A	100 psia, SO-8

# NPP-301 Specifications

SUNSTAR 传感与控制 <http://www.sensor-ic.com/> TEL: 0755-83376549 FAX: 0755-83376182 E-MAIL: szss20@163.com

PARAMETER	VALUE	UNITS	NOTES
<b>GENERAL</b>			
Pressure Range	100	kPa	≈ 15 psi
	200	kPa	≈ 30 psi
	700	kPa	≈ 100 psi
Maximum Pressure	3 x		rated pressure
<b>ELECTRICAL @ 25°C (77°F) unless otherwise stated</b>			
Excitation	3.0	V	10VDC max.
Input Impedance	5,000 ± 20%	Ω	
Output Impedance	5,000 ± 20%	Ω	


<b>ENVIRONMENTAL</b>			
Electrostatic Damage (ESD)	Class 1		
Operating Temperature Range	-40 to +125	°C	-40° to +257°F

<b>MECHANICAL<sup>(1)</sup></b>			
Weight	≈ 0.10	grams	
Media Compatibility	Clean, dry air and noncorrosive gases		

<b>PERFORMANCE<sup>(2)</sup></b>					
PARAMETER	UNITS	MIN.	TYP.	MAX.	NOTES
Offset	mV/V		±10		
Full Scale Output	mV		60 ±20		
Linearity	%FSO		±0.20		3
Hysteresis and Repeatability	%FSO		±0.1		
Thermal Coefficient of Zero	%FSO/°C		±0.04		4
Thermal Coefficient of Resistance	%/°C		+0.30		4
Thermal Coefficient of Sensitivity	%FSO/°C		-0.20		4
Thermal Hysteresis of Zero	%FSO		±0.10		5
Long-Term Stability of FSO	%FSO		±0.20		6

**Notes:** 1. Standard IC industry bake operations should be used prior to surface mount operations. Consult factory for further information. 2. Values measured at 3VDC and 22°C, unless otherwise noted. 3. Best fit straight line. 4. Typical coefficients, between 0° and +70°C. 5. 0° to 70°C. 6. Typical value over one year.

## PACKAGE DIAGRAM

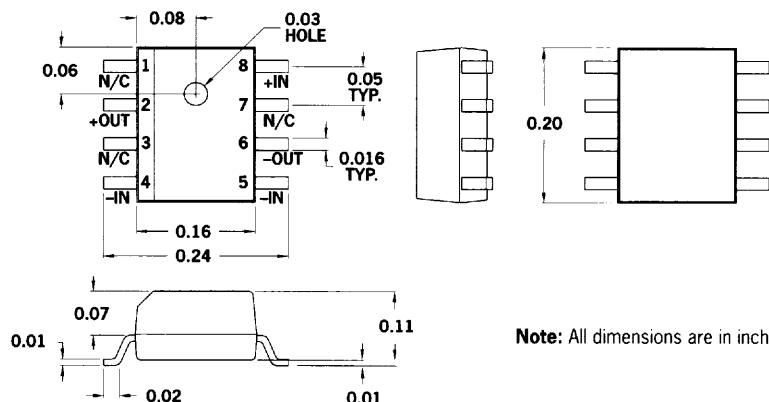

**Note:** All dimensions are in inches

**Sales Terms:** NovaSensor standard sales terms apply. Prices and specifications are subject to change without notice.  
**Warranty:** NovaSensor warrants its products against defects in material and workmanship for 12 months from date of shipment. Products not subjected to misuse will be repaired or replaced. THE FOREGOING IS IN LIEU OF ANY OTHER EXPRESSED OR IMPLIED WARRANTIES. NovaSensor reserves the right to make changes without further notice to any products herein. NovaSensor makes no warranty, representation or guarantee regarding the suitability of its products for any particular application, nor does NovaSensor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims and all liability, including without limitation consequential or incidental damages.



NOVASENSOR

SUNSTAR 自动化 <http://www.sensor-ic.com/> TEL: 0755-83376549 FAX: 0755-83376182 E-MAIL: szss20@163.com

1055 Mission Court • Fremont • California 94539 • Toll Free: 800-962-7364 Tel: 510-661-6000 Fax: 510-770-0645

**SUNSTAR 商斯达实业集团**是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: [SUNS8888@hotmail.com](mailto:SUNS8888@hotmail.com)

邮编：518033 E-mail:[szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382