

SS0406 3 1/2 BIT CLINICAL THERMOMETER


1. General Descriptions

SS0406 is a CMOS digital clinical thermometer IC for measuring body temperature in Centigrade(°C) or Fahrenheit(°F) mode by its bonding option. It also provides alarm and auto power off functions. The other electronic components are LCD display, thermistor, 1.5V battery, ON/OFF switch, buzzer, resistors and capacitors.

2. Features

- ◆ Single 1.5V battery operation.
- ◆ Single-chip CMOS construction.
- ◆ Bonding option for Centigrade/ Fahrenheit measurement.
- ◆ Measurement range: +32.0~+42.0°C(+89.6~+107.6 °F). Resolution: 0.1°C(0.1°F).
- ◆ Measurement accuracy: $\pm 0.1^\circ\text{C}(\pm 0.2^\circ\text{F})$.
- ◆ One-key input switch for ON/OFF.
- ◆ Alarm warning for fever.
- ◆ Highest temperature hold.
- ◆ Auto power off after 10 min.
- ◆ Displays last time measured temperature.

3. Function Block Diagram

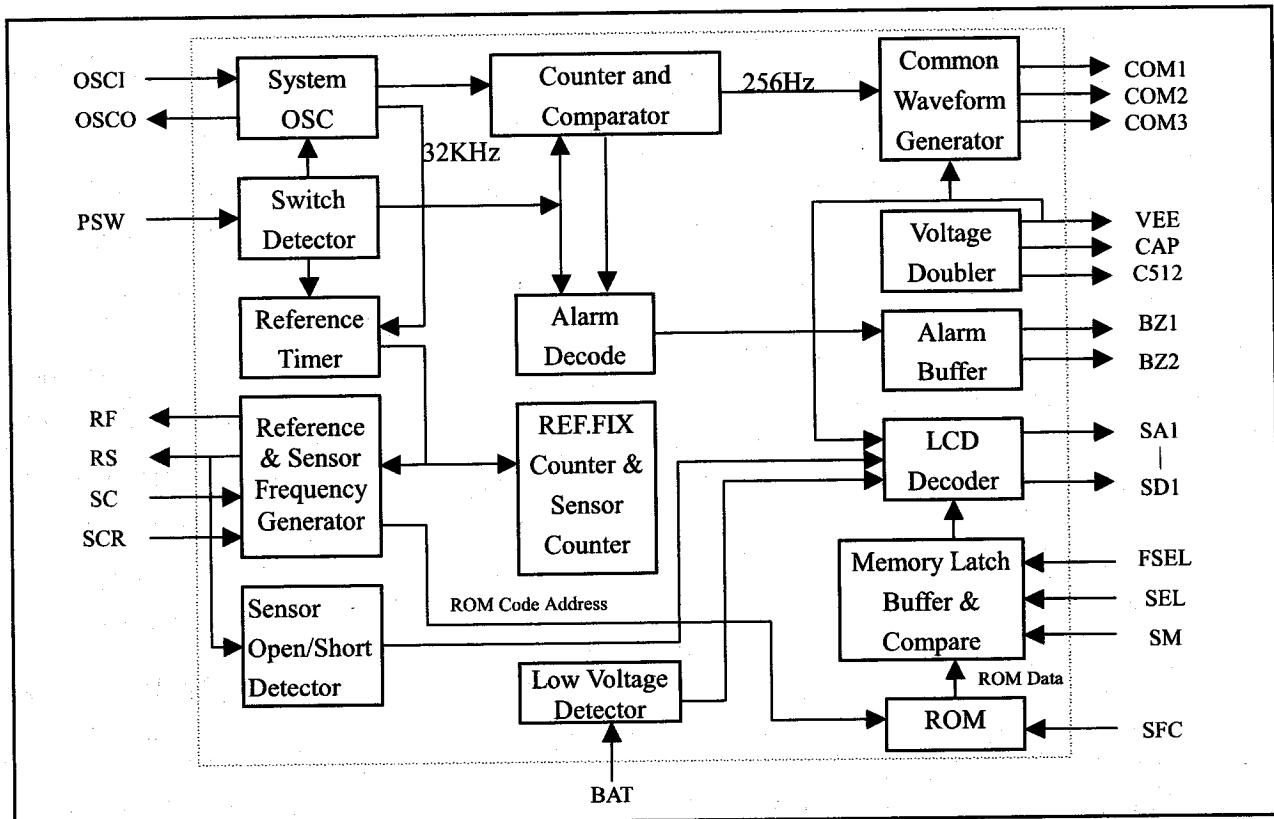

7. Electrical Characteristics

(All voltage referenced to GND, Ambient temperature=25 °C, VDD=1.5V)

Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Voltage	V _{DD}		1.3	1.5	1.65	V
Operating Current Average	I _{DD}	V _{DD} =1.5V, No load	--	--	30	µA
Stand-by Current	I _{STB}	V _{DD} =1.5V	--	--	1.0	µA
Input Voltage	V _{IL}		V _{SS} -0.3V			V
	V _{IH}				V _{DD} +0.3V	V
Output Voltage	V _{OL}		V _{SS} -0.1V			V
	V _{OH}				V _{DD} +0.1V	V
Buzzer Driving Current		V _{DS} =1/2 V _{DD}	1			mA
Buzzer Sinking Current		V _{DS} =1/2 V _{DD}	1			mA
Pull-low Resistor		PSW Pad		300		KΩ
		TEST2 Pad		6		KΩ
		TEST1 Pad		30		KΩ

8. PAD Location

NO.	PADNAME	X	Y
1	SC	103	1176
2	SCR	-93	1176
3	RF	-354	1176
4	RS	-585	1176
5	TEST1	-780	1176
6	OSCI	-1047	1176
7	OSCO	-1044	283
8	BUZ1	-1047	-31
9	BUZ2	-1047	-385
10	COM1	-1047	-695
11	COM2	-1047	-916
12	COM3	-1047	-1177
13	SA1	-886	-1177
14	SA2	-621	-1177
15	SA3	-470	-1177
16	SB1	-205	-1177
17	SB2	-49	-1177

NO.	PADNAME	X	Y
18	SB3	215	-1177
19	SC1	371	-1177
20	SC2	635	-1177
21	SC3	773	-1177
22	SD1	1024	-1177
23	C512	1032	-979
24	CAP	1038	-741
25	VEE	1038	-553
26	VDD	1049	-353
27	FSEL	1049	4
28	TEST2	1049	257
29	PSW	1049	590
30	SEL	1049	826
31	LOWC	970	1176
32	ML	707	1176
33	GND	520	1177
34	CLFH	343	1176

mark °C(°F) flash stop.

- I. When measurement is over, if the temperature > 37.5 °C(99.5 °F), the buzzer alarms "Bi-Bi-Bi

" for 4 sec, as follows:

Bi	Bi	Bi	
0.125S	0.125S	0.125S	0.125S
			0.375S

If the temperature ≤ 37.5 °C(99.5 °F), the buzzer alarms "Bi-Bi-Bi-Bi" for 4 sec, as follows:

Bi	
0.5S	0.5S

- J. It will auto power off when measurement is over than 10 minutes.

- K. When measurement is over, if the temperature rises within 10 min, the °C (°F) mark will flash again (repeat form the step of 2-D).

<3> When push switch, buzzer will alarm "Bi" about 0.125 sec.

<4> When power off: the stand-by current ≤ 0.5 uA.

<5> The frequency of buzzer is 5.3KHz.

<6> After <2>-A, if detect low voltage(1.35 ± 0.05 V):

- A: When SEL=1 or NC:

The battery mark '■' flashes at the speed of 1Hz and the measurement maybe not accurate, means thermometer must be changed battery.

- B: When SEL=0:

The LCD display flashes at the speed of 1Hz and the measurement maybe not accurate, means thermometer must be changed battery.

<7> When TEST2 pin is connected to VDD, the LCD display the realtime value not the highest value, in order to adjust the reference resistance RF during the process of producing.

<8> °C/°F(SFC Pad) fuction is used pad option.

	PAD CONNECT TO VSS	PAD NO CONNECT
SFC Pad	°F	°C

SM Pad: no connect.

<9> Thermometer others charter is below:

Temperature range	32.0°C ~42.0°C	89.6°F ~ 107.6°F
Accuracy	± 0.1 °C	± 0.2 °F
Resolution	0.1 °C	0.1 °F

SEL Pad: no connect.

<10> Themometer others charter is below:

Teperature range	32.0°C ~44.0°C	89.6°F ~ 111.2°F
Accuracy	± 0.1 °C	± 0.2 °F
Resolution	0.1 °C	0.1 °F

- II. When FSEL=1: (FOR CH2112S-2)

<1> Power SW: Push switch to power on or power off.

<2> When power on:

A. The 1CD display ~~188.8~~ °C (or ~~188.8~~ °F) about 2 sec. If non-memory function the "M"will not display.

B. After A, with memory function push switch more than 2 sec, LCD will display the stable-temperature of last measure, and "M" will display.

C. After B, LCD display 36.5°C(97.7°F) about 1 sec.

D. After C, when it is measuring. The °C (or °F) will flash at the speed of 1HZ.

E. With memory function, the stable-temperature time will be counted after releaseing switch for 8 sec.

Without memory function, the stable-temperature time will be counted after turn on 8 sec.

- F. If the temperature < 32.0 °C(89.6 °F), then display L °C(F).
- G. If the temperature > 44.0 °C(111.2 °F), then display H °C(F).
- H. When measuring, the LCD will always display the highest temperature.
If the measure temperature is not changed more than 16 sec, the measurement is over and mark °C(F) flash stop.
- J. When measurement is over, if the temperature > 37.5 °C(99.5 °F),
The buzzer alarms "Bi-Bi-Bi—Bi-Bi-Bi—" for 4 sec, as follows:
Bi— Bi— Bi—
0.125S 0.125S 0.125S 0.125S 0.125S 0.375S
If the temperature ≤ 37.5 °C(99.5 °F), the buzzer alarms "Bi-Bi-Bi-Bi—" for 4 sec, as follows:
Bi—
0.5S 0.5S
- K. It will auto power off when measurement is over than 10 minutes.
- L. When measurement is over, if the temperature rises within 10 minutes, the remeasure the temperature, but the °C (°F) mark will not flash again. When remeasurement is over, the buzzer will not alarm again.
- <3> When push switch, buzzer will alarm "Bi" about 0.125 sec.
- <4> When power off: the stand-by current ≤ 0.5 uA.
- <5> The frequency of buzzer is 4KHz.
- <6> After <2>-B, if detect low voltage (1.35 ± 0.05 V), the LCD will only display battery mark " " and the measurement maybe not accurate, means thermometer must be changed battery.
- <7> When sensor circuit detect error, LCD only display "E", it will not measure normally until the error status cancel.
- <8> When TEST2 pin is connected to VDD, the LCD display the realtime value not the highest value, in order to adjust the reference resistance RF during the process of producing
- <9> Memory (SM Pad) and °C / °F(SFC Pad) function is used pad option.

	PAD CONNECT TO VSS	PAD WITHOUT CONNECT
SFC Pad	°F	°C
SM Pad	NO MEMORY FUNCTION	MEMORY FUNCTION

SEL Pad: NO CONNECT.

<10> THERMOMETER OTHERS CHARTER IS BELOW:

TEMPERATURE RANGE	32.0°C ~44.0°C	89.6°F ~ 111.2°F
ACCURACY	± 0.1 °C	± 0.2 °F
RESOLUTION	0.1 °C	0.1 °F

6. Absolute Maximum Ratings

(All voltage referenced to GND)

Item	Symbol	Rating	Unit
Supply Voltage	V _{DD}	0 ~ 2.0	V
Input / Output Voltage	V _I /V _O	GND-0.5 ~ VDD+0.5	V
Operating Temperature	T _{DD}	-2 ~ +75	°C
Storage Temperature	T _{ST}	-55 ~ +125	°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

4. Pin Descriptions

Pin	Name	I/O	Function
1	SC	I	Reference and sensor frequency input pad. The reference & sensor frequency generator consists of pad 1,2,3,4.
2	SCR	I	Inner resistor about 470 ohm connect to SC pad.
3	RF	O	PMOS open drain, connect to the reference resistance.
4	RS	O	PMOS open drain, connect to the sensor.
5	TEST1	I	Test pad, for IC test only.
6	ISCI	I	System frequency input pad.
7	ISCO	O	System frequency output pad.
8	BZ1	O	Output pad, the buffer of buzzer.
9	BZ2	O	Output pad, the buffer of buzzer.
10~12	COM1~COM3	O	LCD backplane drive, 3-level voltage out
13~15	SA1~SA3	O	LCD segment drive
16~18	SB1~SB3	O	LCD segment drive
19~21	SC1~SC3	O	LCD segment drive
22	SD1	O	LCD segment drive
23	C512	O	PAD 23,24 IS DOUBLER VOLTAGE 3V CAPACITOR CONNECT.
24	CAP	O	For negative voltage, NMOS output
25	VEE	O	THE VOLTAGE IS 3V.
26	VDD	I	1.5V
27	FSEL	I	Function select pad. No connect: for CH2112S-1 function. Connect to VDD: for CH2112S-2 function
28	TEST2	I	Pull low test pad, for the test of production. When connect to VDD, LCD display the real-time value (not the highest value).
29	PSW	I	Pull low input pad, push switch to power on or power off.
30	SEL	I	For CH2112S-1 function. No connect: when detecting low voltage, the battery mark will blink at the speed of 1Hz. Connect to VSS: when detecting low voltage, LCD display will blink at the speed of 1Hz.
31	Rlowcc	I/O	For the low voltage detecting.
32	SM		For CH2112S-2 function. No connect: memory function. Connect to VSS: no memory function.
33	VSS	I	Power supply GND
34	CLFH	I	Select temperature show °C or °F. No connect: memory function. Connect to VSS: no memory function.

5. Function Descriptions

I. WHEN FSEL=NC (FOR CH2112S-1)

<1> Power SW: Push switch to power on or power off.

<2> When power on:

A. The LCD display ~~188.8~~^E When SEL=NC) or ~~188.8~~^E_M (When SEL=0) about 2 sec.

B. After A, show the temperature of last measure (and "M" When SEL=0) about 2 sec.

C. After B, Show L °C (or °F) about 0.6 sec (Don't show "M" when SEL=0).


D. After C, when it is measuring. The °C (or °F) will flash at the speed of 1 Hz.

E. If the temperature < 32.0 °C(89.6 °F), then display L °C(°F).

F. If the temperature > 42.0 °C(107.6 °F), then display H °C(°F).

G. When measuring, the LCD will always display the highest temperature.


H. If the measure temperature is not changed more than 16 second, the measurement is over and

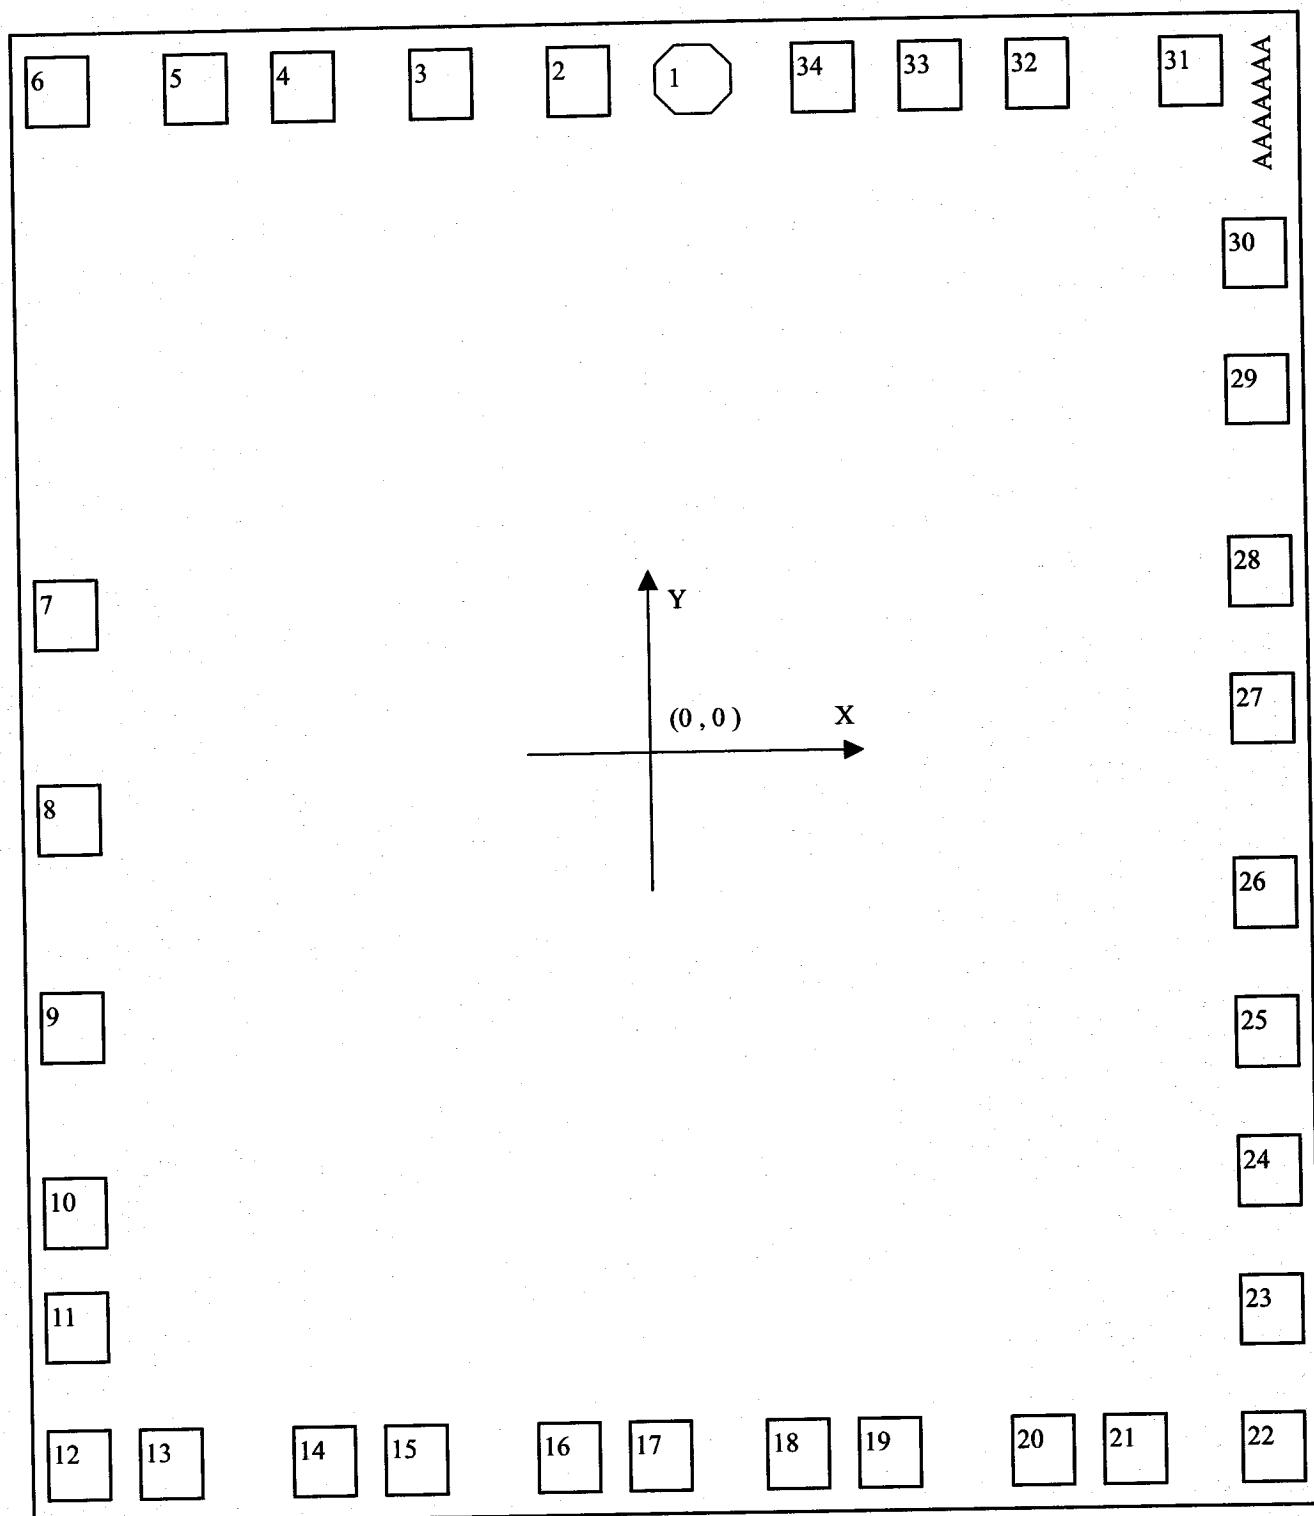

Chip Size: (2490*2750) μ^2 m **Note:** The substrate must be connected to VDD.

9. Application Circuit

● Application 1

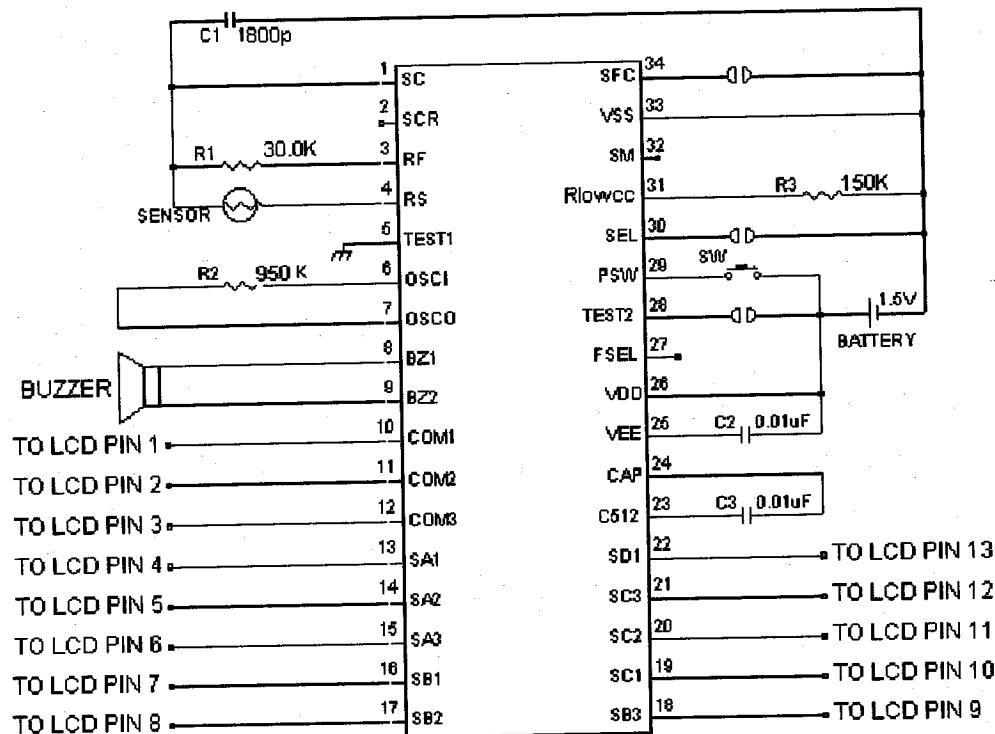

REMARK:


1. Sensor is use ET-503 sensor.
2. RF is selected according to sensor type.

	NC	VSS
SFC pad	$^{\circ}\text{C}$	$^{\circ}\text{F}$
SEL pad	LCD-1(■)	LCD-2(M)

Note: The value of R₂, R₃, C₁ is allowed the range of $\pm 5\%$.

The value of R₁ is allowed the range of $\pm 1\%$.

● Application 2

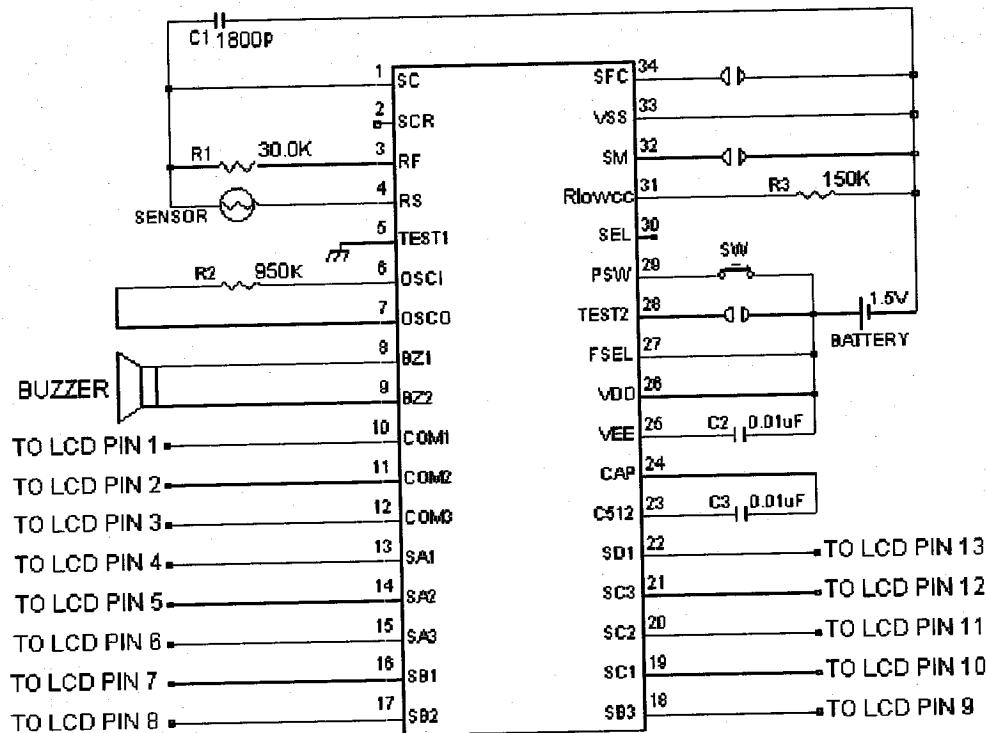

REMARK:


1. Sensor is use ET-503 sensor.
2. RF is selected according to sensor type.

	NC	VSS
SFC pad	°C	°F
SM pad	MEMORY	NO MEMORY

Note: The value of R₂, R₃, C₁ is allowed the range of ±5%.

The value of R₁ is allowed the range of ±1%.

● Application 3

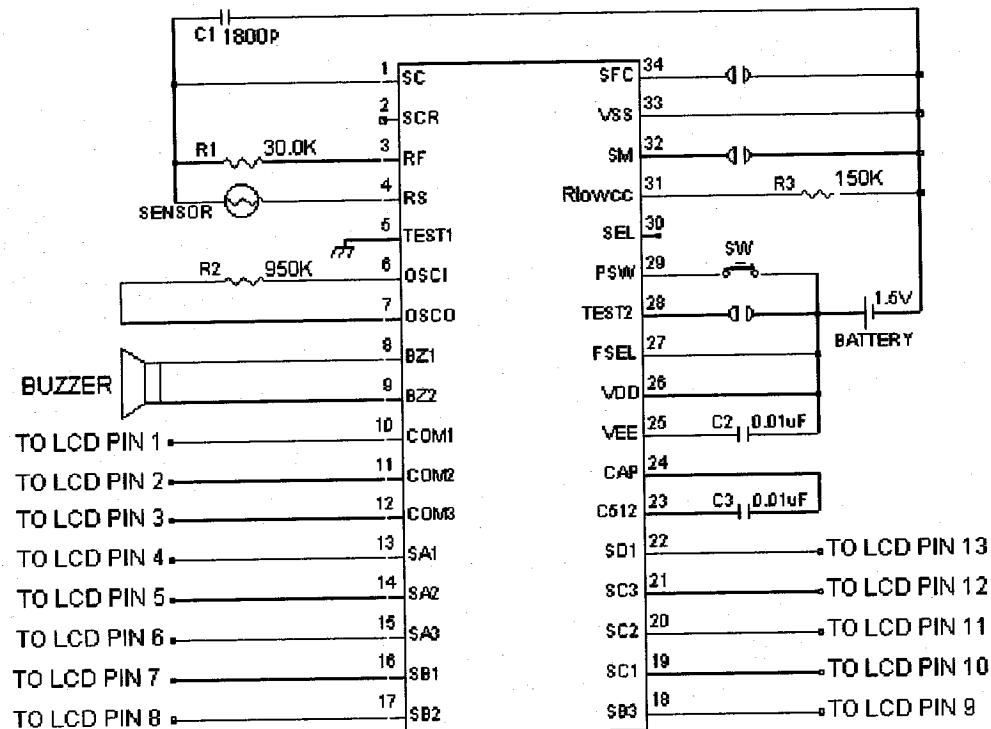

REMARK:


1. Sensor is use ET-503 sensor.
2. RF is selected according to sensor type.
- 3.

	NC	VSS
SFC pad	°C	°F
SM pad	MEMORY	NO MEMORY

Note: The value of R₂, R₃, C₁ is allowed the range of ±5%.

The value of R₁ is allowed the range of ±1%.

FSEL Pad: no connect
SEL Pad : connect to VSS (LCD-2)

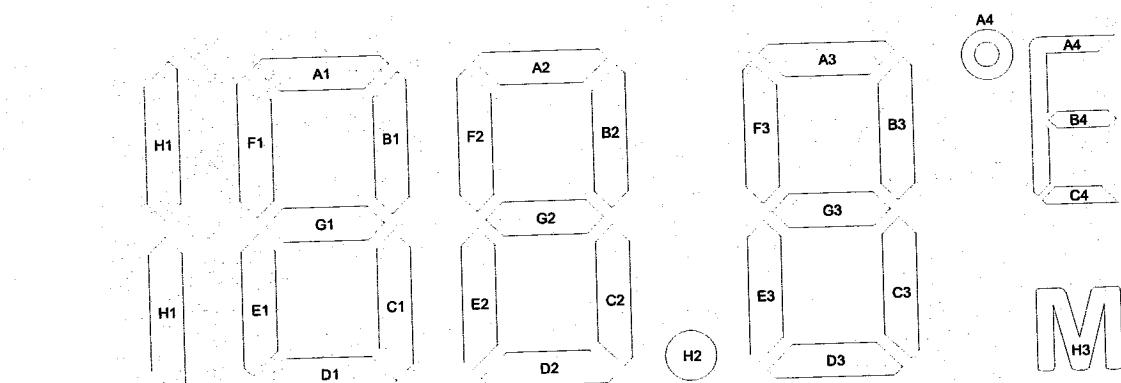


1 2 3 4 5 6 7 8 9 10 11 12 13

	1	2	3	4	5	6	7	8	9	10	11	12	13
COM1	COM1			F1	A1	B1	F2	A2	B2	F3	A3	B3	A4
COM2		COM2		E1	G1	C1	E2	G2	C2	E3	G3	C3	B4
COM3			COM3	H1	D1			D2	H2		D3	H3	C4

SPEC: A. 1/3 DUTY, 1/2 BIAS .(LCD USES 3 V)

B. $V_{TH} = 1.5 V$


FSEL Pad: no connect
 SEL Pad : no connect (LCD-1)

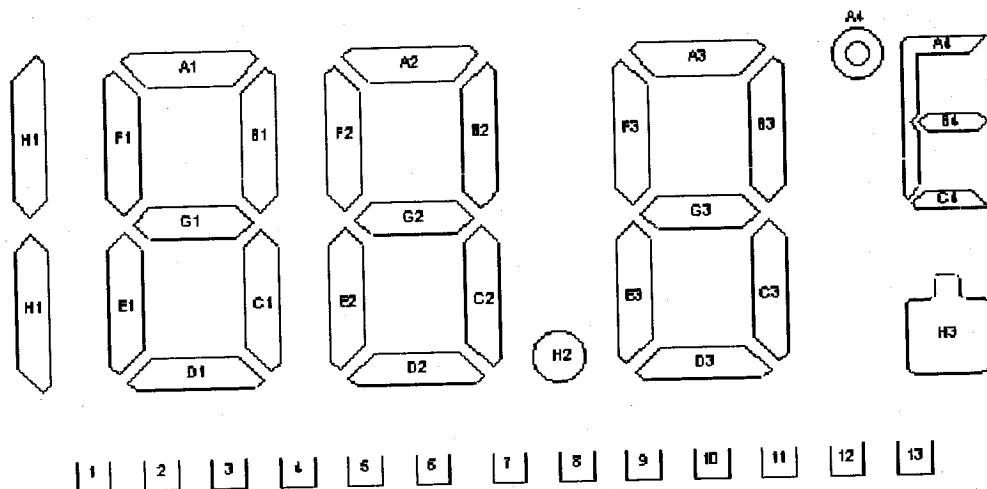

	1	2	3	4	5	6	7	8	9	10	11	12	13
COM1	COM1			F1	A1	B1	F2	A2	B2	F3	A3	B3	A4
COM2		COM2		E1	G1	C1	E2	G2	C2	E3	G3	C3	B4
COM3			COM3	H1	D1			D2	H2		D3	H3	C4

LCD SPEC: A. 1/3 DUTY, 1/2 BIAS. (LCD USES 3V)

B. $V_{TN}=1.5V$

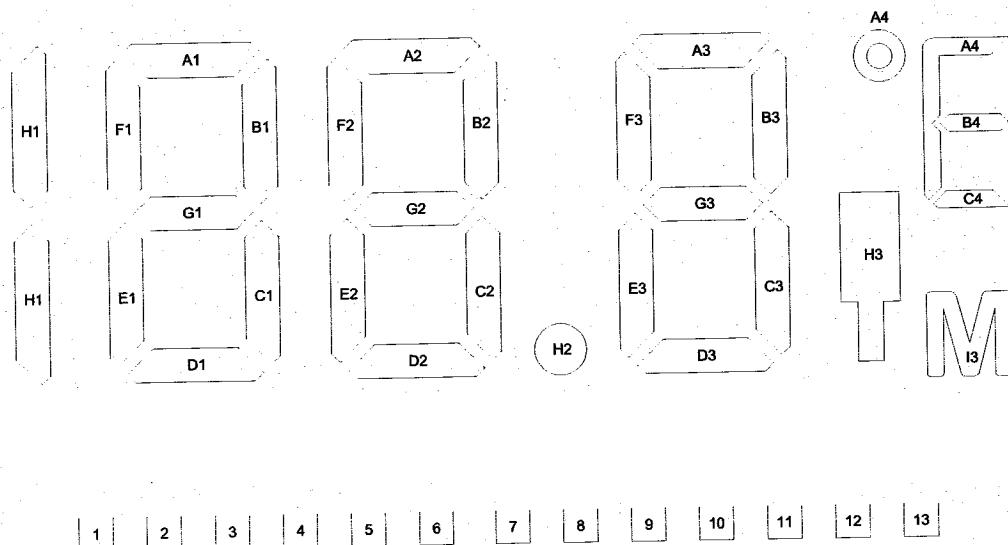

	1	2	3	4	5	6	7	8	9	10	11	12	13
COM1	COM1			F1	A1	B1	F2	A2	B2	F3	A3	B3	A4
COM2		COM2		E1	G1	C1	E2	G2	C2	E3	G3	C3	B4
COM3			COM3	H1	D1			D2	H2	I3	D3	H3	C4

SPEC: A. 1/3 DUTY, 1/2 BIAS. (LCD USES 3 V)

B. $V_{TH} = 1.5V$

NOTICE:

1. The information contained herein could be changed without notice owing to product and /or technical improvements. Please make sure before using the product that the information you are referring to is up-to-date.
2. No responsibility is assumed by us for any consequence resulting from any wrong or improper operation, etc.of the product.

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

中国传感器科技信息网：HTTP://WWW.SENSOR-IC.COM/

工控安防网：HTTP://WWW.PC-PS.NET/

消费电子专用电路网：HTTP://WWW.SUNSTARE.COM/

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ：195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)
西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376