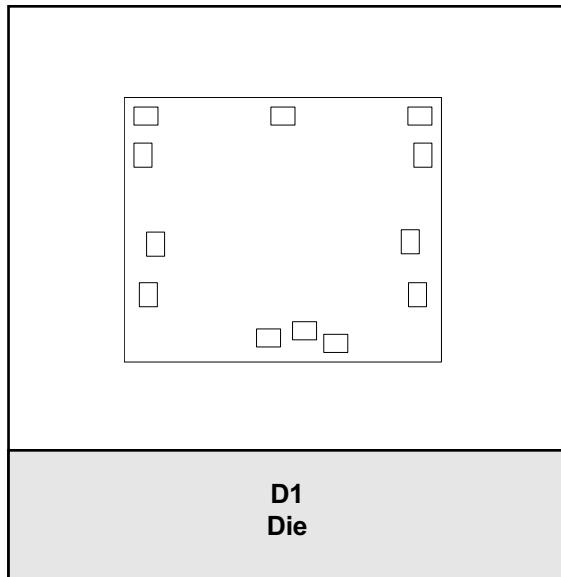


**FEATURES**

- Low Insertion Loss: 0.5 dB at 2 GHz
- High Isolation: > 25 dB
- Low Harmonic Levels: < -65 dBc  
at max. GSM power
- Low Control Voltage Operation: to +2.5 V

**APPLICATIONS**

- Front-end Modules for GSM Wireless Handsets

**PRODUCT DESCRIPTION**

The AWS5523 is a single pole, three terminal (SP3T) RF switch developed to meet the stringent requirements of GSM systems. Manufactured in ANADIGICS's state-of-the-art pHEMT process, the device uses patent-pending circuit topologies to

provide the low insertion loss, high port-to-port isolation and high linearity needed to enhance the performance of GSM radios. The AWS5523 is offered as an unpackaged MMIC die.

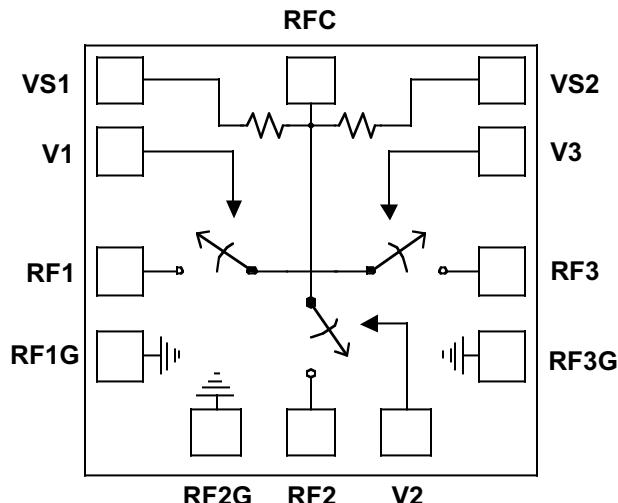
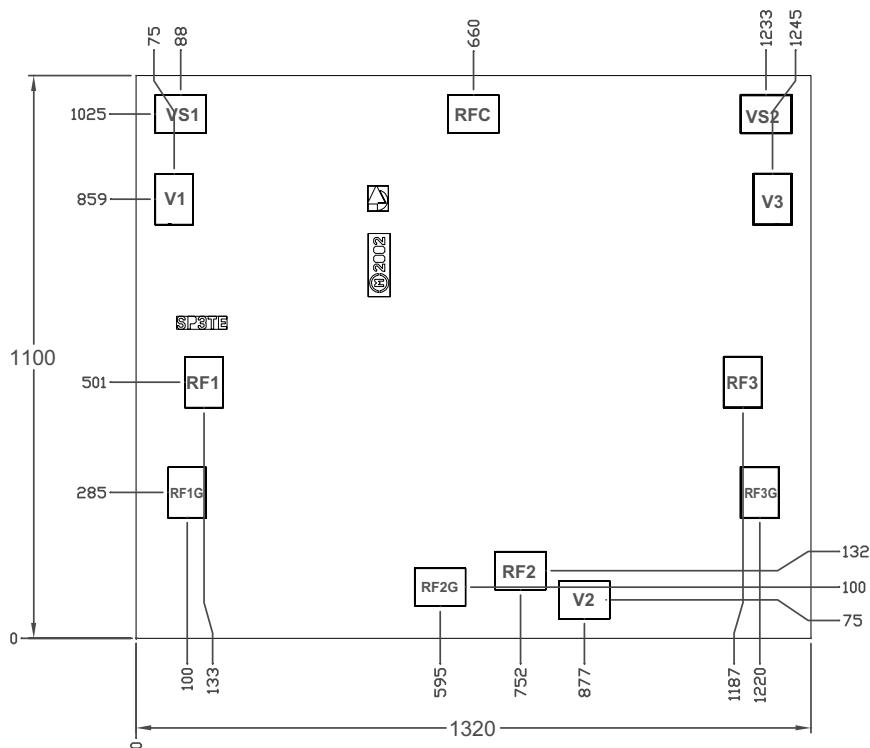


Figure 1: Block Diagram



Dimensions in  $\mu\text{m}$ .  
Bond Pads:  $100\mu\text{m} \times 75\mu\text{m}$ .  
Die Thickness:  $178\mu\text{m}$ .  
No backside metal.

**Figure 2: Die Configuration**

**Table 1: Pad Description**

<b>NAME</b>	<b>DESCRIPTION</b>	<b>NAME</b>	<b>DESCRIPTION</b>
V1	Control voltage, RF path 1	RFG3	Ground
RF1	RF port, path 1	RF3	RF port, path 3
RFG1	Ground	V3	Control voltage, RF path 3
RFG2	Ground	VS2	Common port bias voltage (logic high)
RF2	RF port, path 2	RFC	RF common port
V2	Control voltage, RF path 2	VS1	Common port bias voltage (logic high)

**ELECTRICAL CHARACTERISTICS****Table 2: Absolute Minimum and Maximum Ratings**

PARAMETER	MIN	MAX	UNIT	COMMENTS
Common Port Bias Voltage ( $V_S$ )	-0.2	+8.0	V	at VS1 or VS2 <sup>(1)</sup>
Control Voltages ( $V_1, V_2, V_3$ )	-0.2	+8.0	V	
RF Input Power ( $P_{IN}$ )	-	10	W	at RF1, RF2, RF3 and RFC
Storage Temperature <sup>(2)</sup>	-65	+150	°C	

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

**Notes:**

- (1) The VS1 and VS2 ports may remain open-circuited without damage to the device.
- (2) Storage Temperature limits apply to the die only after it has been removed from the ANADIGICS shipping material.
- 3. The RF1, RF2, RF3 and RFC ports should be AC-coupled. No external DC bias should be applied.

**Table 3: Operating Ranges**

PARAMETER	MIN	TYP	Max	UNIT	COMMENTS
RF Frequency (f)	0.5	-	2.5	GHz	
Common Port Bias Voltage ( $V_S$ )		<sup>(1)</sup>			applied at either VS1 or VS2 port
Control Voltages ( $V_1, V_2, V_3$ )	0 +2.5	-	+0.2 +3.5	V	RF path OFF state RF path ON state
Ambient Temperature ( $T_A$ )	-30	-	+85	°C	

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

**Notes:**

- (1) For optimal linearity performance, the Common Port Bias Voltage ( $V_S$ ) should be set to the same Control Voltage used to turn ON any of the individual RF paths. The VS1 and VS2 ports may remain open-circuited without damage to the device, but with some degradation in linearity.

Table 4: Electrical Specifications

( $T_A = +25^\circ\text{C}$ ; RF ports terminated with  $50 \Omega$ ;  $V_n = +2.7 \text{ V}$  and is the Control Voltage for the ON path, RFC-RFn;  $V_x = 0 \text{ V}$  and is the Control Voltage for the other two OFF paths, RFC-RFx)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Insertion Loss 1 GHz 2 GHz	- -	0.4 0.5	0.6 0.8	dB	RFC port to selected RFn port
Return Loss <sup>(1)</sup> 1 GHz 2 GHz	- -	-29 -23	-20 -15	dB	RFC port and selected RFn port
Isolation 1 GHz 2 GHz	25 25	27 27	- -	dB	RFC port to isolated RFx ports
Input Third Order Intercept <sup>(2)</sup> 800 MHz Cellular Band 1900 MHz PCS Band	- -	+66 +59	- -	dBm	RFC port to selected RFn port
2nd Harmonic Rejection 1 GHz 2 GHz	- -	-77 -77	-65 -65	dBc	RFC port to selected RFn port $P_{IN} = +34 \text{ dBm}$ $P_{IN} = +32 \text{ dBm}$
3rd Harmonic Rejection 1 GHz 2 GHz	- -	-72 -75	-65 -65	dBc	RFC port to selected RFn port $P_{IN} = +34 \text{ dBm}$ $P_{IN} = +32 \text{ dBm}$
Current Consumption	- -	- -	30 5	$\mu\text{A}$	each $V_n$ port VS1 or VS2 port

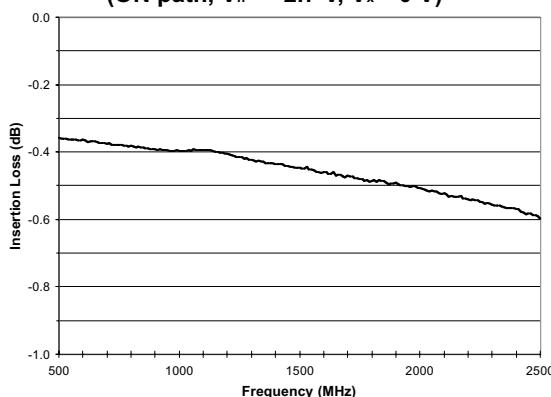
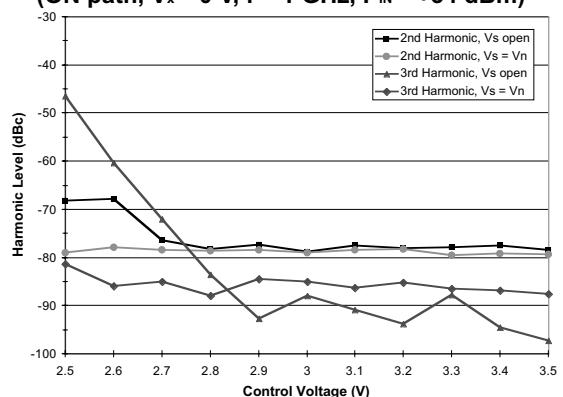
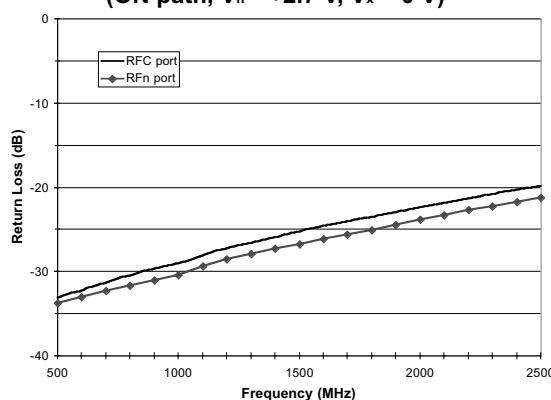
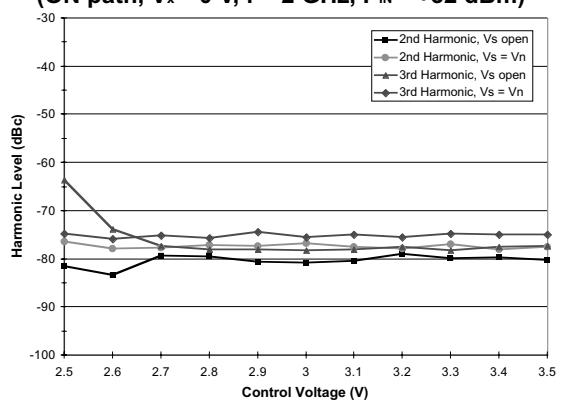
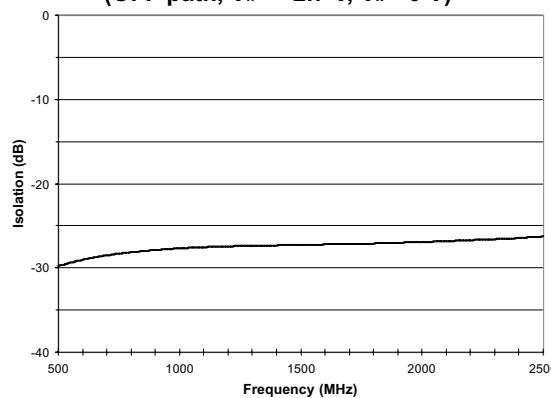
Notes:

(1) Isolated RFx ports have a return loss of approximately -3 dB.

(2) For the Cellular Band, two tones with  $P_{IN} = +22.5 \text{ dBm}$  each, at 837 and 838 MHz. For the PCS Band, two tones with  $P_{IN} = +21 \text{ dBm}$  each, at 1880 and 1881 MHz.

Table 5: Switch Control Truth Table

CONTROL VOLTAGES			RF PATH SELECTION		
$V_1$	$V_2$	$V_3$	RFC - RF1	RFC - RF2	RFC - RF3
+2.5 to +3.5 V	0 to +0.2 V	0 to +0.2 V	ON	OFF	OFF
0 to +0.2 V	+2.5 to +3.5 V	0 to +0.2 V	OFF	ON	OFF
0 to +0.2 V	0 to +0.2 V	+2.5 to +3.5 V	OFF	OFF	ON

**PERFORMANCE DATA****Figure 3: Insertion Loss vs. Frequency  
(ON path,  $V_n = +2.7$  V,  $V_x = 0$  V)****Figure 4: Harmonics of 1 GHz vs. Control Voltage  
(ON path,  $V_x = 0$  V,  $f = 1$  GHz,  $P_{IN} = +34$  dBm)****Figure 5: Return Loss vs. Frequency  
(ON path,  $V_n = +2.7$  V,  $V_x = 0$  V)****Figure 6: Harmonics of 2 GHz vs. Control Voltage  
(ON path,  $V_x = 0$  V,  $f = 2$  GHz,  $P_{IN} = +32$  dBm)****Figure 7: Isolation vs. Frequency  
(OFF path,  $V_n = +2.7$  V,  $V_x = 0$  V)**

**APPLICATION INFORMATION****Die Applications**

Bonding and circuit connections for the unpackaged AWS5523 die are shown in Figure 8, and application details are listed in the following notes:

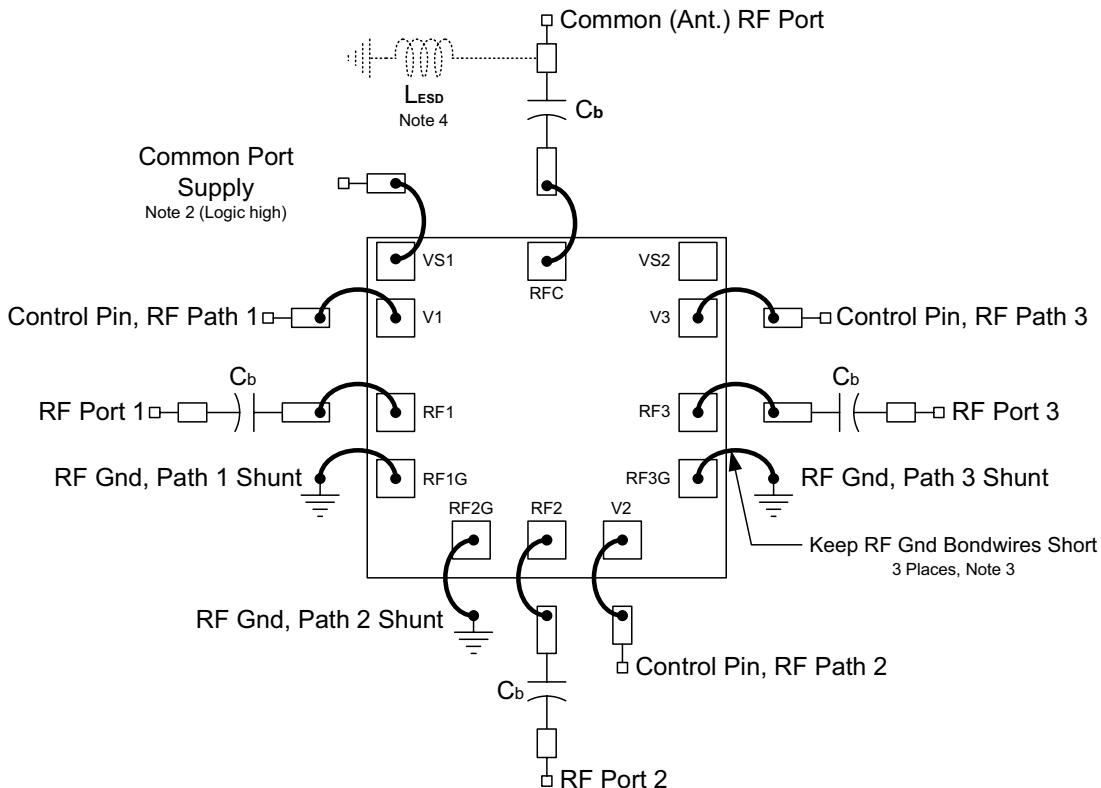
1. C<sub>b</sub> are DC blocking capacitors external to the device. A value of 100pF is sufficient for operation to 500MHz. The values may be tailored to provide specific electrical responses. The isolation of the switch provides enough decoupling of RF ports 1 through 3 so that overall switch performance is not affected.

2. The VS1 and VS2 pins provide a fixed voltage potential to the common port of the switch. To get the best linear performance, either VS1 or VS2 must be tied to the logic high voltage potential (not the power supply). Only one of the pins need be attached, with the decision determined by external circuit layout. Currentdraw on this pin is less than 5µA.

3. The RF Ground bondwires should be kept short as possible and bonded directly to a good RF ground for best broadband performance.

4. L<sub>ESD</sub> provides a means to increase the ESD protection on a specific RF port, typically the port attached to the antenna. The ESD rating of the device is ±125V HBM overall. This rating is associated with the control pin to RF port path. RF port to RF port/RF Gnd has been determined to be >±500V HBM for this technology. By using L<sub>ESD</sub> as an RF choke on a port, an ESD protection to ±8kV contact discharge can be achieved.

5. The die may be attached by either conductive or non-conductive epoxy formulated for attaching semiconductor parts. The back of the die is electrically isolated from the switch circuit and can be grounded or left isolated.

**Figure 8: Application Schematic**

**NOTES**

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AWS5523D1	-30 °C to +85 °C	Die	(contact ANADIGICS for details)



**ANADIGICS, Inc.**  
141 Mount Bethel Road  
Warren, New Jersey 07059, U.S.A.  
Tel: +1 (908) 668-5000  
Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>  
E-mail: Mktg@anadigics.com

#### **IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

#### **WARNING**

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：<HTTP://www.rfoe.net/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN：[SUNS8888@hotmail.com](mailto:SUNS8888@hotmail.com)

邮编：518033 E-mail：[szss20@163.com](mailto:szss20@163.com) QQ：195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382