

Upper and Lower Neck Load Cell

Type M560A6A...

Six-axial

Type M560A6A... is designed to measure forces and moments in the upper neck and/or in the lower neck of the H3 3-year old crash test dummy (Y6).

- Six-axial (F_x , F_y , F_z , M_x , M_y , M_z)
- ID module available
- Low linearity errors and hysteresis errors
- Kistler system cabling
- Polarities according to SAE J211/1



Description

The load cell is made of elements on which forces and moments are transmitted. The mechanical deformation element, applied with strain gage, serves for mechanical electrical deformation. The forces and moments to be measured create mechanical stretches and buckling in the gaging member.

In order to avoid linearity errors, the deformation paths are constructively held small (high stiffness). Thus a proportional behavior is realized. The force and moment proportional resistance variations are measured by a Wheatstone-type bridge circuit. The load cell is available with ID modules, either a UPS module (Universal Parameter Memory) or a Dallas module can be chosen for this functionality. These modules are integrated in an external housing in the wiring or in the connector. Customized cable lengths and connectors with specific pin assignments are optionally available. If the load cell is used at the location "lower neck", polarities of F_x and M_x must be changed in order to fulfil the SAE J211/1.

Line-up of equivalent load cells:

	Type
Kistler	M560A6A...
FTSS	IF-234
Denton	3303

Technical Data

Axial Data		F_x	F_y	F_z	M_x	M_y	M_z
Measuring range	kN	4,45	4,45	6,7			
	N·m				170	170	113
Bridge output voltage (typ.)	mV/V	2,8	2,8	1,5	2,2	2,2	2,4
Sensitivity (typ.)	$\mu\text{V/V/kN}$	630	630	220			
	$\mu\text{V/V/N}\cdot\text{m}$				12,9	12,9	21
Bridge resistance	Ω	350	350	700	350	350	700
Ultimate load, static	%	150	150	150	150	150	150

General Data

Supply voltage		
without ID modules	VDC	5 ... 15
with ID modules	VDC	9 ... 12
Insulation resistance ¹⁾	M Ω	>90
Operating temperature range	$^{\circ}\text{C}$	-20 ... 80
Storage temperature range	$^{\circ}\text{C}$	-30 ... 90
Amplitude non-linearity (typ.)	%	<1
Hysteresis (typ.)	%	<1
Channel cross talk	%	<5
Bridge zero output (typ./max.)	mV/v	0,01/0,03
Weight	grams	236

All specifications are typical at 25 $^{\circ}\text{C}$ and rated at 10 V sensor supply voltage, unless otherwise specified.

¹⁾ All wires to screen (GND), measured with 10 VDC

M560A6A_000-797e-12.11

Application

Type M560A6A... is designed to measure forces and moments in the upper neck and/or in the lower neck of the H3 3-year old crash test dummy (Y6).

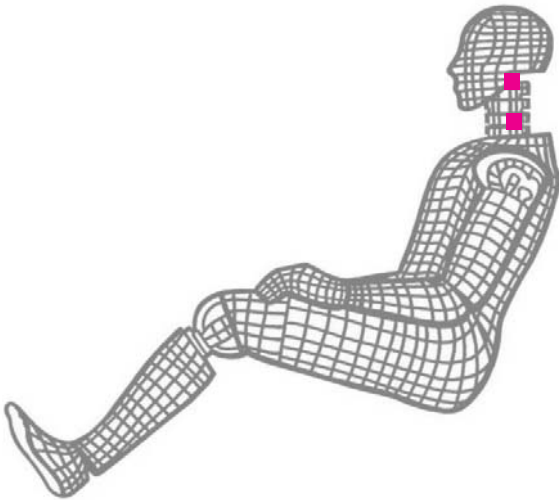


Fig. 1: Dummy application, location upper/lower Neck

Ordering Key

Type M560A6A

Design

Standard	UM
----------	----

Cable Length before Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Additional Electronics

Sensor detail, as per type declaration force-moment TP-650-2	#
--	---

Cable Length after Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Connector

Conn. type, as per TP-600	#-
Conn. type assignment, as per TP-600	-#



Fig. 2: Application sample, mounted at lower neck location

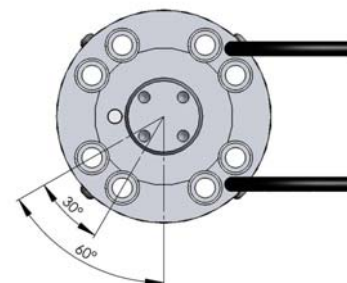


Fig. 3: Dimensions

Included Accessories

- None

Optional Accessories

- Add. label with serial number, plug side
- Add. label with ID number at sensor
- ID module
- Add. shunt

Type No.

M015KABID
M015KABID
on request
on request

M560A6A_000-797e-12.11

This information corresponds to the current state of knowledge. Kistler reserves the right to make technical changes. Liability for consequential damage resulting from the use of Kistler products is excluded.

©2011, Kistler Group, Eulachstrasse 22, 8408 Winterthur, Switzerland
Tel. +41 52 224 11 11, Fax +41 52 224 14 14, info@kistler.com, www.kistler.com
Kistler is a registered trademark of Kistler Holding AG.