

## 1. Overview

The M32C/84 is a single-chip microcomputer that utilizes high-performance silicon gate CMOS technology with the M32C/80 series CPU core. The M32C/84 group is available in 144-pin and 100-pin plastic molded QFP/LQFP packages.

With a 16-Mbyte address space, this microcomputer combines advanced instruction manipulation capabilities to process complex instructions by less bytes and execute instructions at higher speed.

It incorporates a multiplier and DMAC adequate for office automation, communication devices and industrial equipments and other high-speed processing applications.

### 1.1 Applications

Audio, cameras, office equipment, communications equipment, portable equipment, etc.

Specifications written in this manual are believed to be accurate, but are not guaranteed to be entirely free of error. Specifications in this manual may be changed for functional or performance improvements. Please make sure your manual is the latest edition.

## 1.2 Performance Outline

Tables 1.1 and 1.2 list performance outlines of the M32C/84 group.

**Table 1.1 M32C/84 Group Performance (144-Pin Package)**

Item		Performance
CPU	Basic instructions	108 instructions
	Shortest instruction execution time	31.3 ns (f(BCLK)=32 MHz, Vcc1=4.2 V to 5.5 V) 50 ns (f(BCLK)=20 MHz, Vcc1=3.0 V to 5.5 V)
	Operation mode	Single-chip, memory expansion and microprocessor modes
	Memory space	16 Mbytes
	Memory capacity	See Table 1.3
Peripheral function	Port	123 I/O pins and 1 input pin
	Multifunction timer	Timer A: 16 bits x 5 channels, Timer B: 16 bits x 6 channels Three-phase motor control circuit
	Intelligent I/O	Time measurement function or waveform generating function: 16 bits x 8 channels Communication function (Clock synchronous serial I/O, Clock asynchronous serial I/O, HDLC data processing)
	Serial I/O	5 channels Clock synchronous serial I/O, Clock asynchronous serial I/O, IEBus <sup>(1)</sup> , I <sup>2</sup> C bus <sup>(2)</sup>
	CAN module	1 channel Supporting CAN 2.0B specification
	A-D converter	10-bit A-D converter: 1 circuit, 34 channels
	D-A converter	8-bit x 2 channels
	DMAC	4 channels
	DMAC II	Can be activated by all peripheral function interrupt factors Immediate transfer, calculation transfer and chain transfer functions
	CRC calculation circuit	CRC-CCITT
	X-Y converter	16 bits X 16 bits
	Watchdog timer	15 bits x 1 channel (with prescaler)
	Interrupt	38 internal and 8 external sources, 5 software sources Interrupt priority level: 7
	Clock generating circuit	4 circuits Main clock oscillation circuit(*), sub clock oscillation circuit(*), ring oscillator, PLL frequency synthesizer (*Oscillation circuits include an internal feedback resistor and external ceramic resonator/crystal oscillator.
	Oscillator stop detect function	Main clock oscillator stop detect function
Supply voltage detect circuit	Available (option)	
Electric characteristics	Supply voltage	Vcc1=4.2 V to 5.5 V, Vcc2=3.0 V to Vcc1 (f(BCLK)=32 MHz) Vcc1=3.0 V to 5.5 V, Vcc2=3.0 V to Vcc1 (f(BCLK)=20 MHz)
	Power consumption	38 mA (Vcc1=Vcc2=5 V, f(BCLK)=32 MHz) 26 mA (Vcc1=Vcc2=3.3 V, f(BCLK)=20 MHz) TBD (Vcc1=Vcc2=3.3 V, f(XCIN)=32 kHz, wait mode)
Flash memory	Program/erase supply voltage	3.3 V ± 0.3 V or 5.0 V ± 0.5 V
	Program and erase endurance	100 times
Operating ambient temperature		-20 to 85°C, -40 to 85°C (option)
Package		144-pin plastic mold QFP

NOTES:

1. IEBus is a trademark of NEC Electronics Corporation.
  2. I<sup>2</sup>C bus is a trademark of Koninklijke Philips Electronics N. V.
- All options are on a request basis.

**Table 1.2 M32C/84 Group Performance (100-Pin Package)**

Item		Performance
CPU	Basic instructions	108 instructions
	Shortest instruction execution time	31.3 ns (f(BCLK)=32 MHz, VCC1=4.2 V to 5.5 V) 50 ns (f(BCLK)=20 MHz, VCC1=3.0 V to 5.5 V)
	Operation mode	Single-chip, memory expansion and microprocessor modes
	Memory space	16 Mbytes
	Memory capacity	See Table 1.3
Peripheral function	Port	87 I/O pins and 1 input pin
	Multifunction timer	Timer A: 16 bits x 5 channels, Timer B: 16 bits x 6 channels Three-phase motor control circuit
	Intelligent I/O	Time measurement function or waveform generating function: 16 bits x 8 channels Communication function (Clock synchronous serial I/O, Clock asynchronous serial I/O, HDLC data processing)
	Serial I/O	5 channels Clock synchronous serial I/O, Clock asynchronous serial I/O, IEBus <sup>(1)</sup> , I <sup>2</sup> C bus <sup>(2)</sup>
	CAN module	1 channel Supporting CAN 2.0B specification
	A-D converter	10-bit A-D converter: 1 circuit, 26 channels
	D-A converter	8-bit x 2 channels
	DMAC	4 channels
	DMAC II	Can be activated by all peripheral function interrupt factors Immediate transfer, calculation transfer and chain transfer functions
	CRC calculation circuit	CRC-CCITT
	X-Y converter	16 bits X 16 bits
	Watchdog timer	15 bits x 1 channel (with prescaler)
	Interrupt	38 internal and 8 external sources, 5 software sources Interrupt priority level: 7
	Clock generating circuit	4 circuits Main clock oscillation circuit(*), sub clock oscillation circuit(*), ring oscillator, PLL frequency synthesizer (* )Oscillation circuits include an internal feedback resistor and external ceramic resonator/crystal oscillator.
	Oscillator stop detect function	Main clock oscillator stop detect function
Supply voltage detect circuit	Available (option)	
Electric characteristics	Supply voltage	VCC1=4.2 V to 5.5 V, VCC2=3.0 V to VCC1 (f(BCLK)=32 MHz) VCC1=3.0 V to 5.5 V, VCC2=3.0 V to VCC1 (f(BCLK)=20 MHz)
	Power consumption	38 mA (VCC1=VCC2=5 V, f(BCLK)=32 MHz) 26 mA (VCC1=VCC2=3.3 V, f(BCLK)=20 MHz) TBD (VCC1=VCC2=3.3 V, f(XCIN)=32 kHz, wait mode)
Flash memory	Program/erase supply voltage	3.3 V ± 0.3 V or 5.0 V ± 0.5 V
	Program and erase endurance	100 times
Operating ambient temperature	-20 to 85°C, -40 to 85°C (option)	
Package	100-pin plastic mold QFP	

NOTES:

1. IEBus is a trademark of NEC Electronics Corporation.
2. I<sup>2</sup>C bus is a trademark of Koninklijke Philips Electronics N. V.

All options are on a request basis.

### 1.3 Block Diagram

Figure 1.1 shows a block diagram of the M32C/84 group microcomputer. The M32C/84 group microcomputer contains ROM and RAM as memory to store instructions and data, CPU to execute calculations and peripheral functions such as interrupt, timer, serial I/O, DMAC, CRC calculation circuit, A-D converter, D-A converter, intelligent I/O and ports.

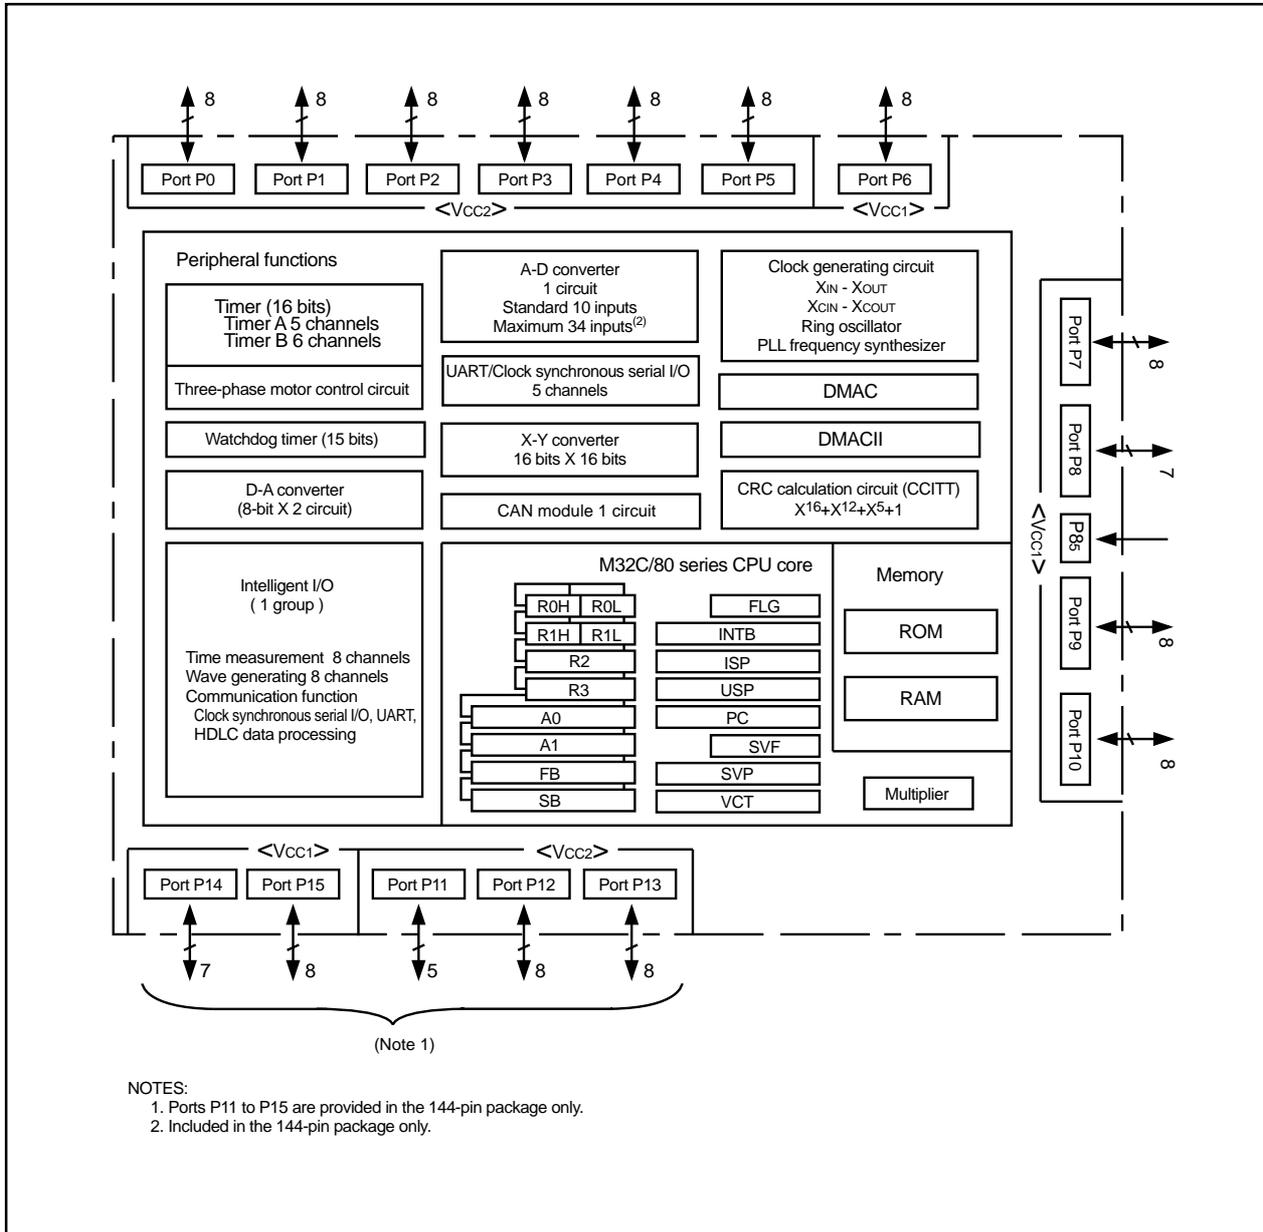


Figure 1.1 M32C/84 Group Block Diagram

### 1.4 Product Information

Renesas plans to release the following products in the M32C/84 group:

- (1) Support for the flash memory version and masked ROM version
- (2) ROM/RAM capacity
- (3) Package

- 100P6S-A : Plastic molded QFP
- 100P6Q-A : Plastic molded QFP
- 144P6Q-A : Plastic molded QFP

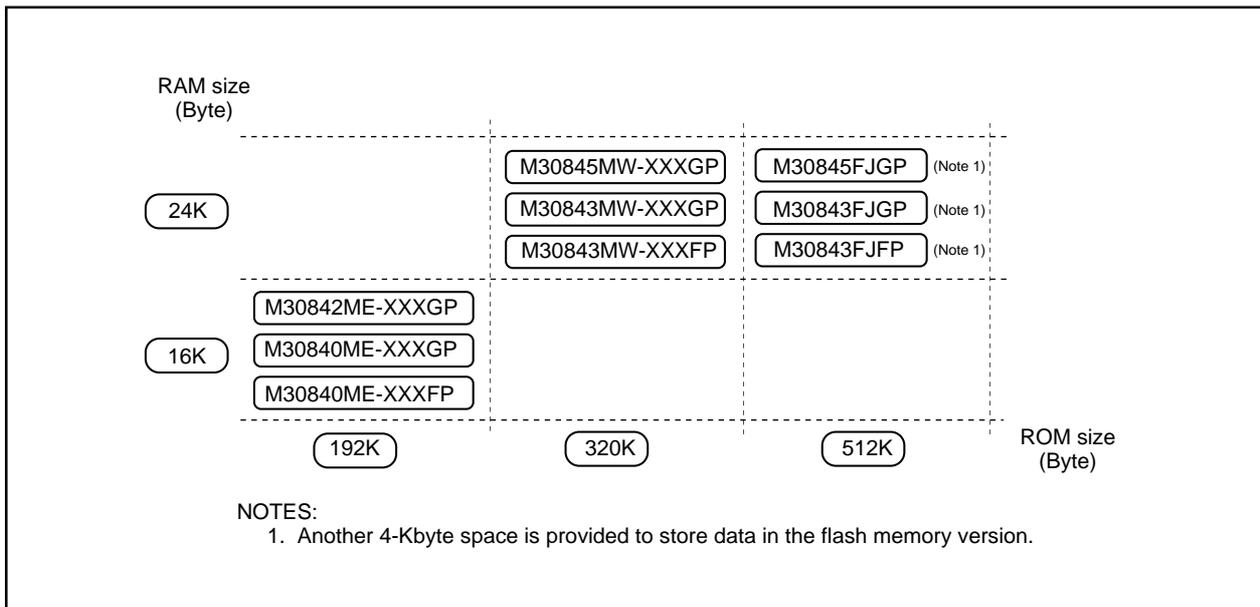


Figure 1.2 ROM/RAM Capacity

Table 1.3 M32C/84 Group

As of September, 2003

Type number	ROM capacity	RAM capacity	Package type	Remarks
M30845FJGP (D)	512K <sup>(1)</sup>	16K	144P6Q-A	Flash memory
M30843FJGP (D)			100P6Q-A	
M30843FJFP (D)			100P6S-A	
M30845MW-XXXGP (P)	320K	24K	144P6Q-A	Masked ROM
M30843MW-XXXGP (P)			100P6Q-A	
M30843MW-XXXFP (P)			100P6S-A	
M30842ME-XXXGP (P)	192K	16K	144P6Q-A	Masked ROM
M30840ME-XXXGP (P)			100P6Q-A	
M30840ME-XXXFP (P)			100P6S-A	

(D): Under development (P): Planning

NOTES:

- 1. Another 4-Kbyte space is provided to store data in the flash memory version.

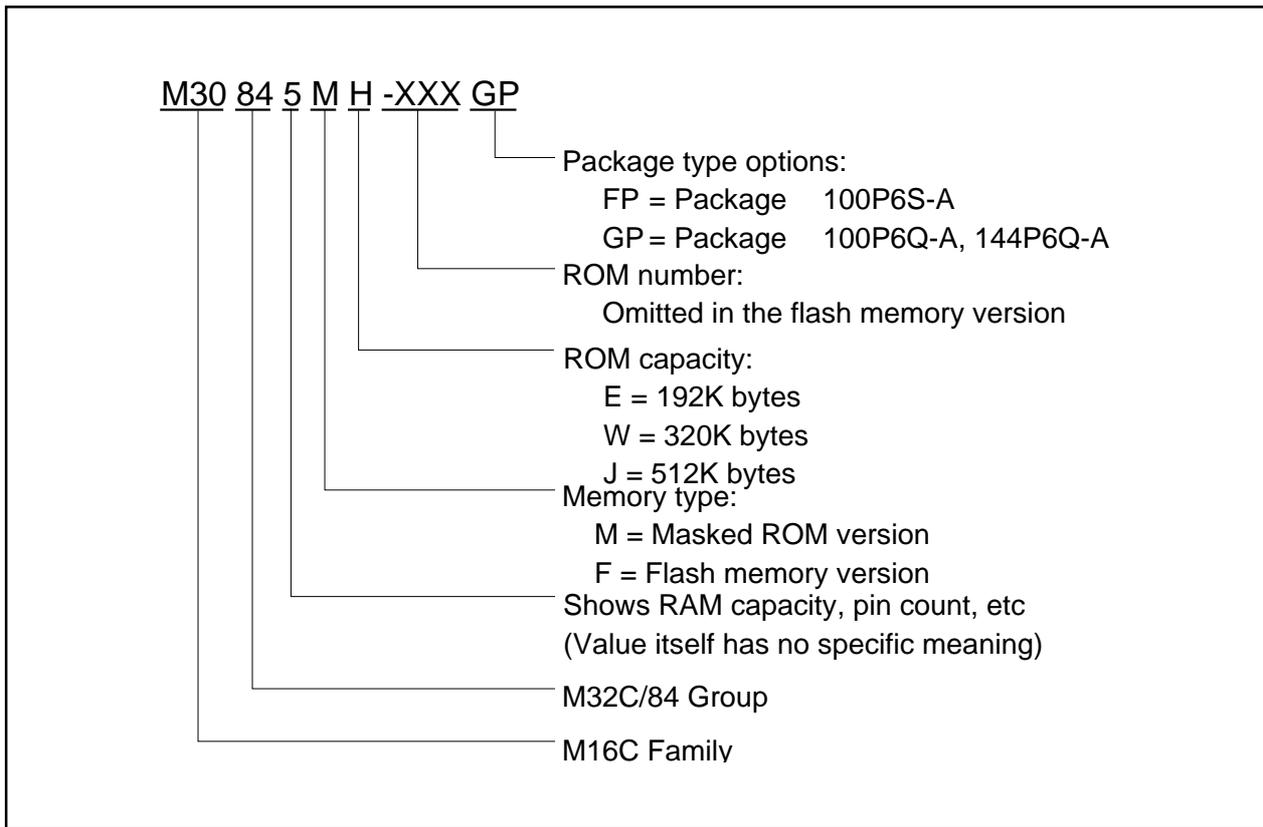


Figure 1.3 Product Numbering System

### 1.5 Pin Assignments and Descriptions

Figures 1.4 to 1.6 show pin assignments (top view).

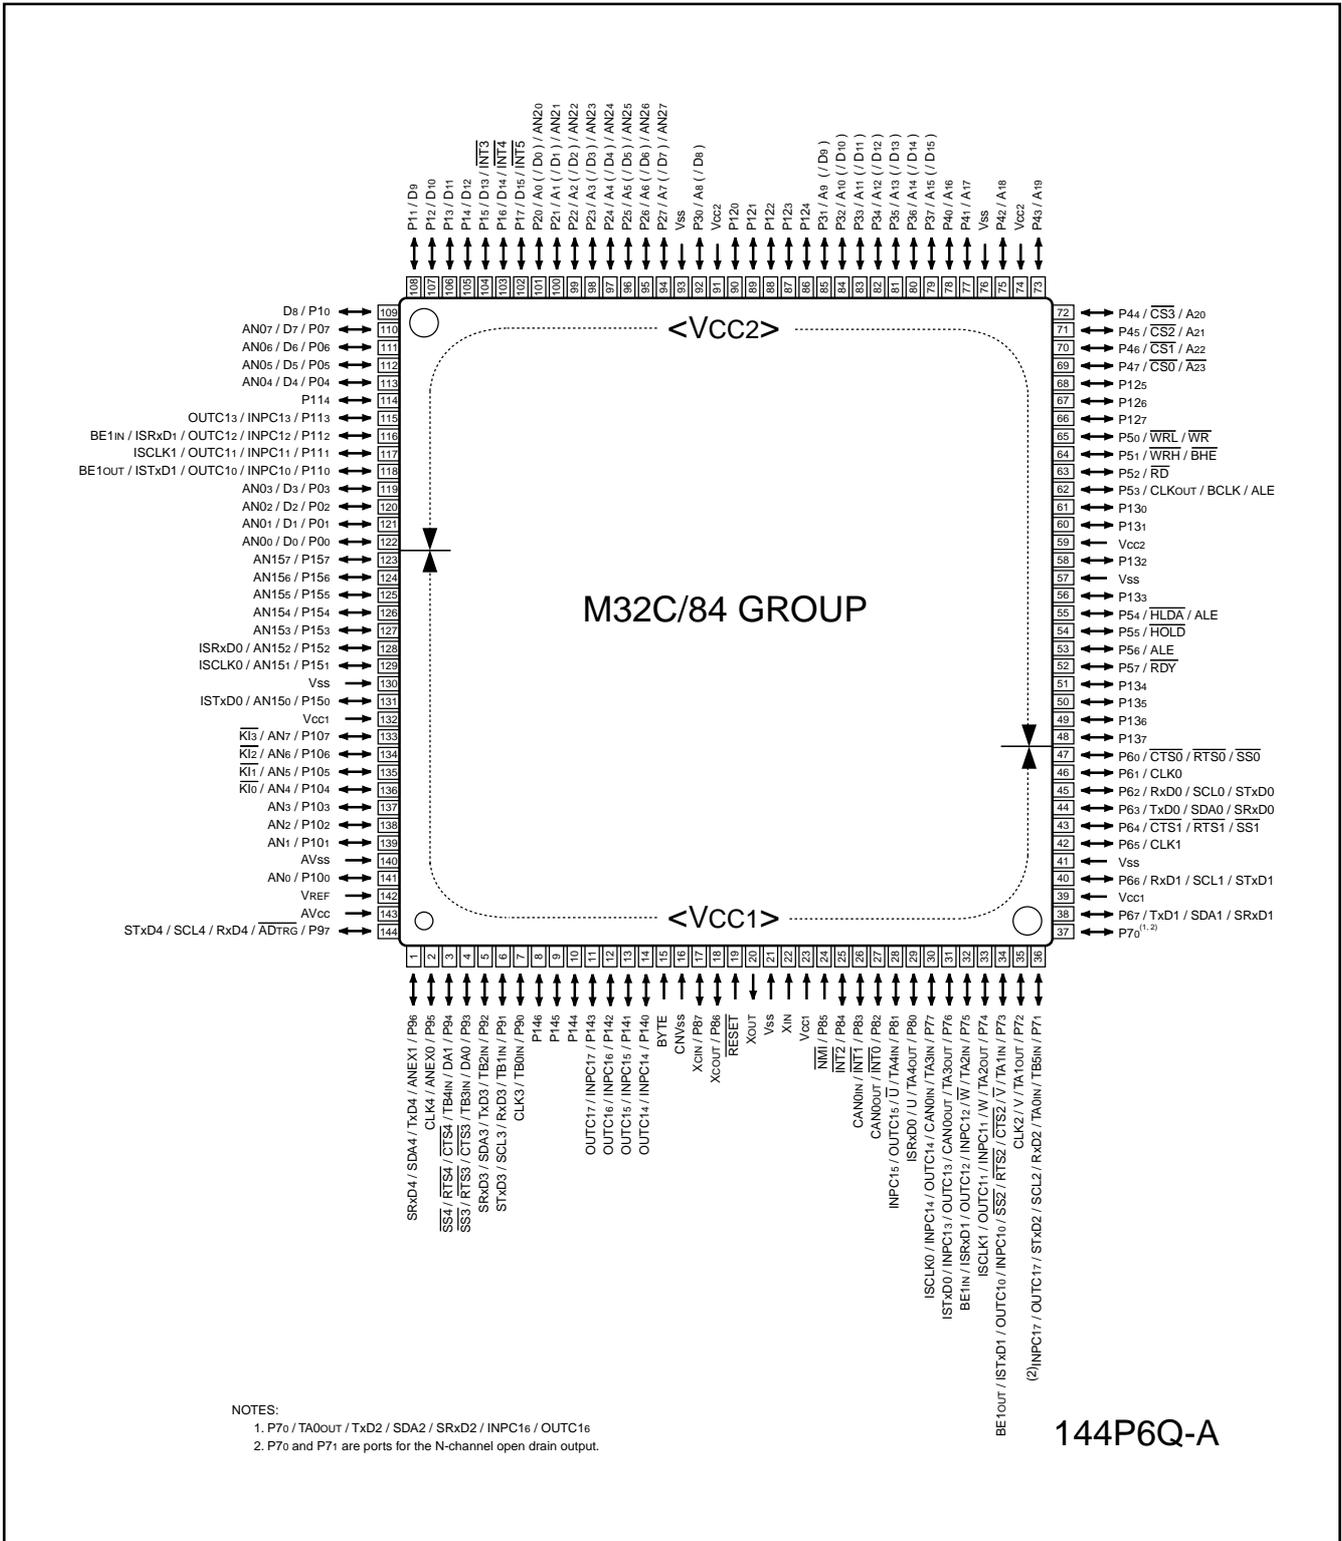


Figure 1.4 Pin Assignment for 144-Pin Package

**Table 1.4 Pin Characteristics for 144-Pin Package**

Pin No	Control pin	Port	Interrupt pin	Timer pin	UART/CAN pin	Intelligent I/O pin	Analog pin	Bus control pin
1		P96			TxD4/SDA4/SRx4		ANEX1	
2		P95			CLK4		ANEX0	
3		P94		TB4IN	CTS4/RTS4/SS4		DA1	
4		P93		TB3IN	CTS3/RTS3/SS3		DA0	
5		P92		TB2IN	TxD3/SDA3/SRx3			
6		P91		TB1IN	RxD3/SCL3/STxD3			
7		P90		TB0IN	CLK3			
8		P146						
9		P145						
10		P144						
11		P143				INPC17/OUTC17		
12		P142				INPC16/OUTC16		
13		P141				INPC15/OUTC15		
14		P140				INPC14/OUTC14		
15	BYTE							
16	CNVSS							
17	X <sub>CIN</sub>	P87						
18	X <sub>COUT</sub>	P86						
19	RESET							
20	X <sub>OUT</sub>							
21	V <sub>SS</sub>							
22	X <sub>IN</sub>							
23	V <sub>CC1</sub>							
24		P85	NMI					
25		P84	INT2					
26		P83	INT1		CAN0IN			
27		P82	INT0		CAN0OUT			
28		P81		TA4IN/U		INPC15/OUTC15		
29		P80		TA4OUT/U		ISRxD0		
30		P77		TA3IN	CAN0IN	INPC14/OUTC14/ISCLK0		
31		P76		TA3OUT	CAN0OUT	INPC13/OUTC13/ISTxD0		
32		P75		TA2IN/W		INPC12/OUTC12/ISRxD1/BE1IN		
33		P74		TA2OUT/W		INPC11/OUTC11/ISCLK1		
34		P73		TA1IN/V	CTS2/RTS2/SS2	INPC10/OUTC10/ISTxD1/BE1OUT		
35		P72		TA1OUT/V	CLK2			
36		P71		TB5IN/TA0IN	RxD2/SCL2/STxD2	INPC17/OUTC17		
37		P70		TA0OUT	TxD2/SDA2/SRx2	INPC16/OUTC16		
38		P67			TxD1/SDA1/SRx1			
39	V <sub>CC1</sub>							
40		P66			RxD1/SCL1/STxD1			
41	V <sub>SS</sub>							
42		P65			CLK1			
43		P64			CTS1/RTS1/SS1			
44		P63			TxD0/SDA0/SRx0			
45		P62			RxD0/SCL0/STxD0			
46		P61			CLK0			
47		P60			CTS0/RTS0/SS0			
48		P137						

**Table 1.4 Pin Characteristics for 144-Pin Package (Continued)**

Pin No	Control pin	Port	Interrupt pin	Timer pin	UART/CAN pin	Intelligent I/O pin	Analog pin	Bus control pin
49		P136						
50		P135						
51		P134						
52		P57						RDY
53		P56						ALE
54		P55						HOLD
55		P54						HLDA/ALE
56		P133						
57	Vss							
58		P132						
59	Vcc2							
60		P131						
61		P130						
62		P53						CLKOUT/BCLK/ALE
63		P52						RD
64		P51						WRH/BHE
65		P50						WRL/WR
66		P127						
67		P126						
68		P125						
69		P47						CS0/A23
70		P46						CS1/A22
71		P45						CS2/A21
72		P44						CS3/A20
73		P43						A19
74	Vcc2							
75		P42						A18
76	Vss							
77		P41						A17
78		P40						A16
79		P37						A15(/D15)
80		P36						A14(/D14)
81		P35						A13(/D13)
82		P34						A12(/D12)
83		P33						A11(/D11)
84		P32						A10(/D10)
85		P31						A9(/D9)
86		P124						
87		P123						
88		P122						
89		P121						
90		P120						
91	Vcc2							
92		P30						A8(/D8)
93	Vss							
94		P27					AN27	A7(/D7)
95		P26					AN26	A6(/D6)
96		P25					AN25	A5(/D5)

**Table 1.4 Pin Characteristics for 144-Pin Package (Continued)**

Pin No	Control pin	Port	Interrupt pin	Timer pin	UART/CAN pin	Intelligent I/O pin	Analog pin	Bus control pin
97		P24					AN24	A4(/D4)
98		P23					AN23	A3(/D3)
99		P22					AN22	A2(/D2)
100		P21					AN21	A1(/D1)
101		P20					AN20	A0(/D0)
102		P17	$\overline{\text{INT5}}$					D15
103		P16	$\overline{\text{INT4}}$					D14
104		P15	$\overline{\text{INT3}}$					D13
105		P14						D12
106		P13						D11
107		P12						D10
108		P11						D9
109		P10						D8
110		P07					AN07	D7
111		P06					AN06	D6
112		P05					AN05	D5
113		P04					AN04	D4
114		P114						
115		P113				INPC13/OUTC13		
116		P112				INPC12/OUTC12/ISRxD1/BE1IN		
117		P111				INPC11/OUTC11/ISCLK1		
118		P110				INPC10/OUTC10/ISTxD1/BE1OUT		
119		P03					AN03	D3
120		P02					AN02	D2
121		P01					AN01	D1
122		P00					AN00	D0
123		P157					AN157	
124		P156					AN156	
125		P155					AN155	
126		P154					AN154	
127		P153					AN153	
128		P152				ISRxD0	AN152	
129		P151				ISCLK0	AN151	
130	Vss							
131		P150				ISTxD0	AN150	
132	Vcc1							
133		P107	$\overline{\text{KI3}}$				AN7	
134		P106	$\overline{\text{KI2}}$				AN6	
135		P105	$\overline{\text{KI1}}$				AN5	
136		P104	$\overline{\text{KI0}}$				AN4	
137		P103					AN3	
138		P102					AN2	
139		P101					AN1	
140	AVss							
141		P100					AN0	
142	VREF							
143	AVcc							
144		P97			RxD4/SCL4/STxD4		$\overline{\text{ADTRG}}$	

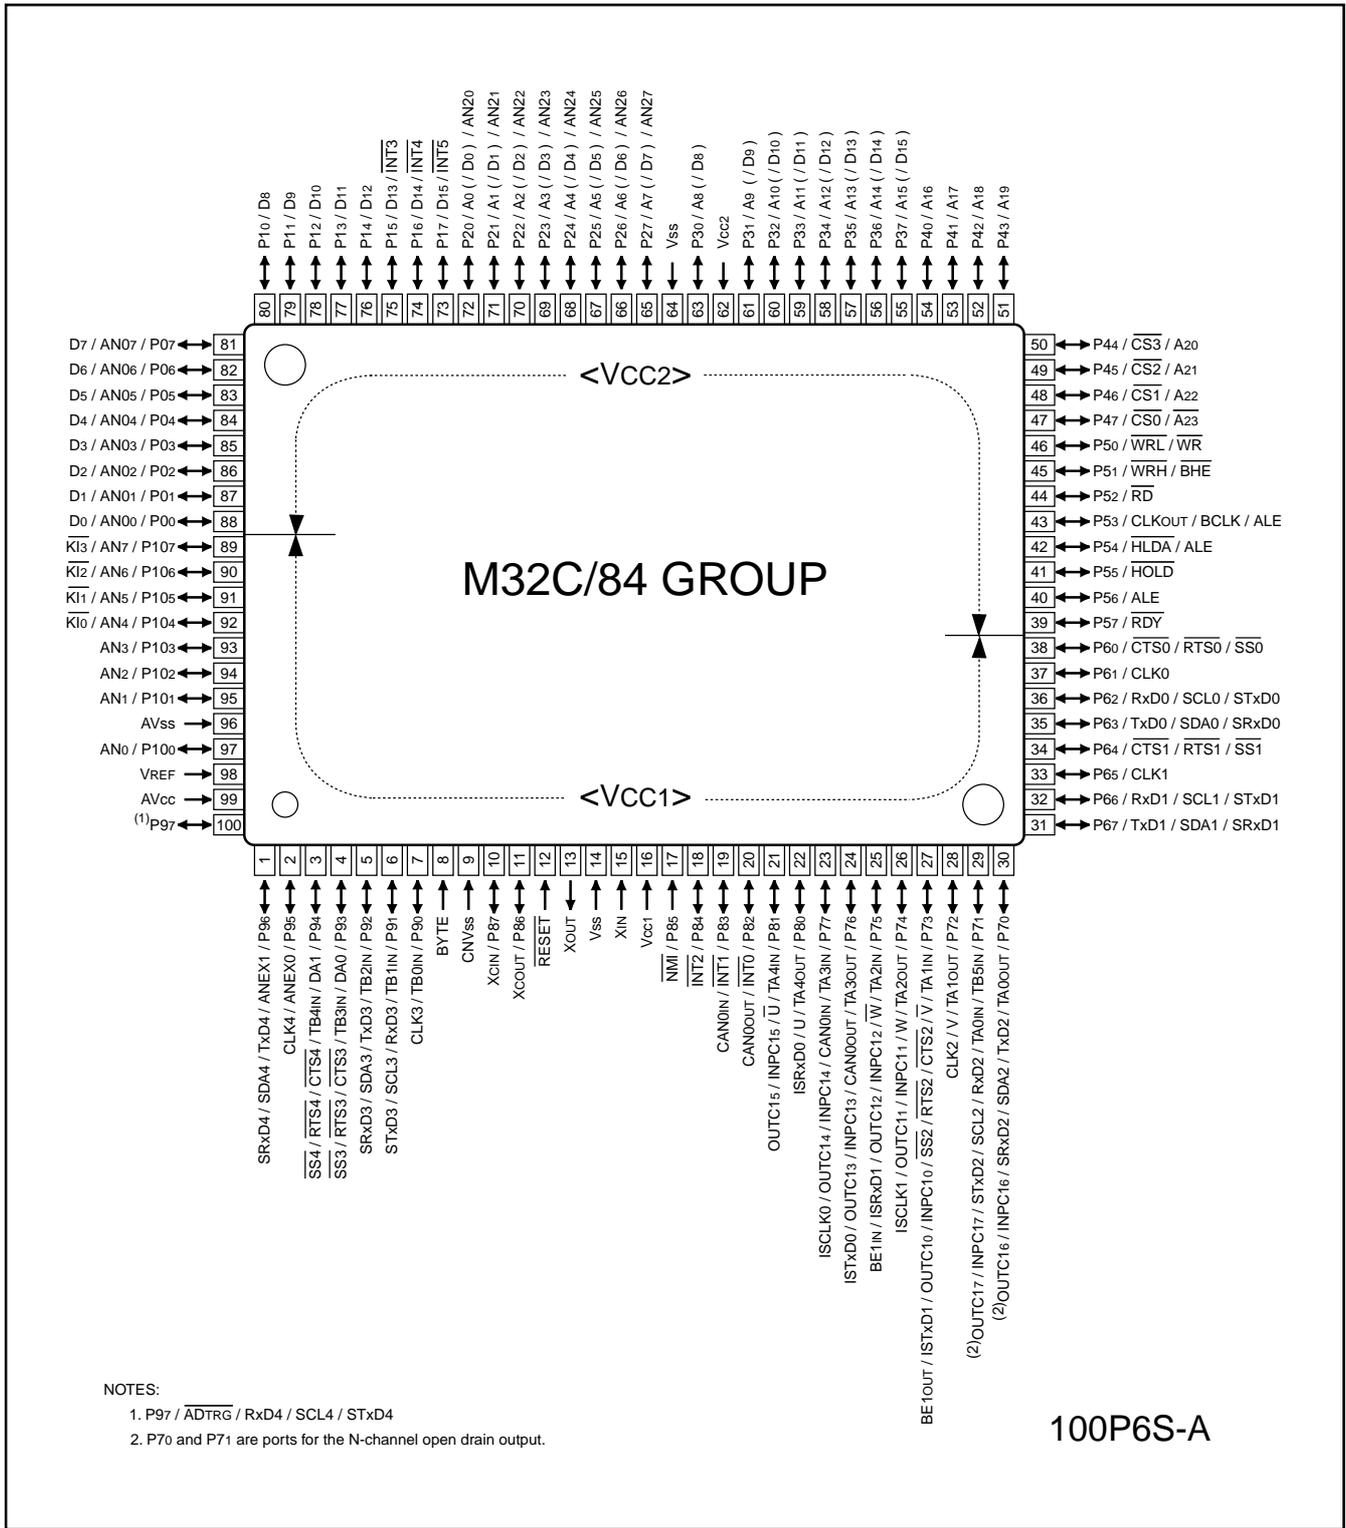


Figure 1.5 Pin assignment for 100-Pin Package

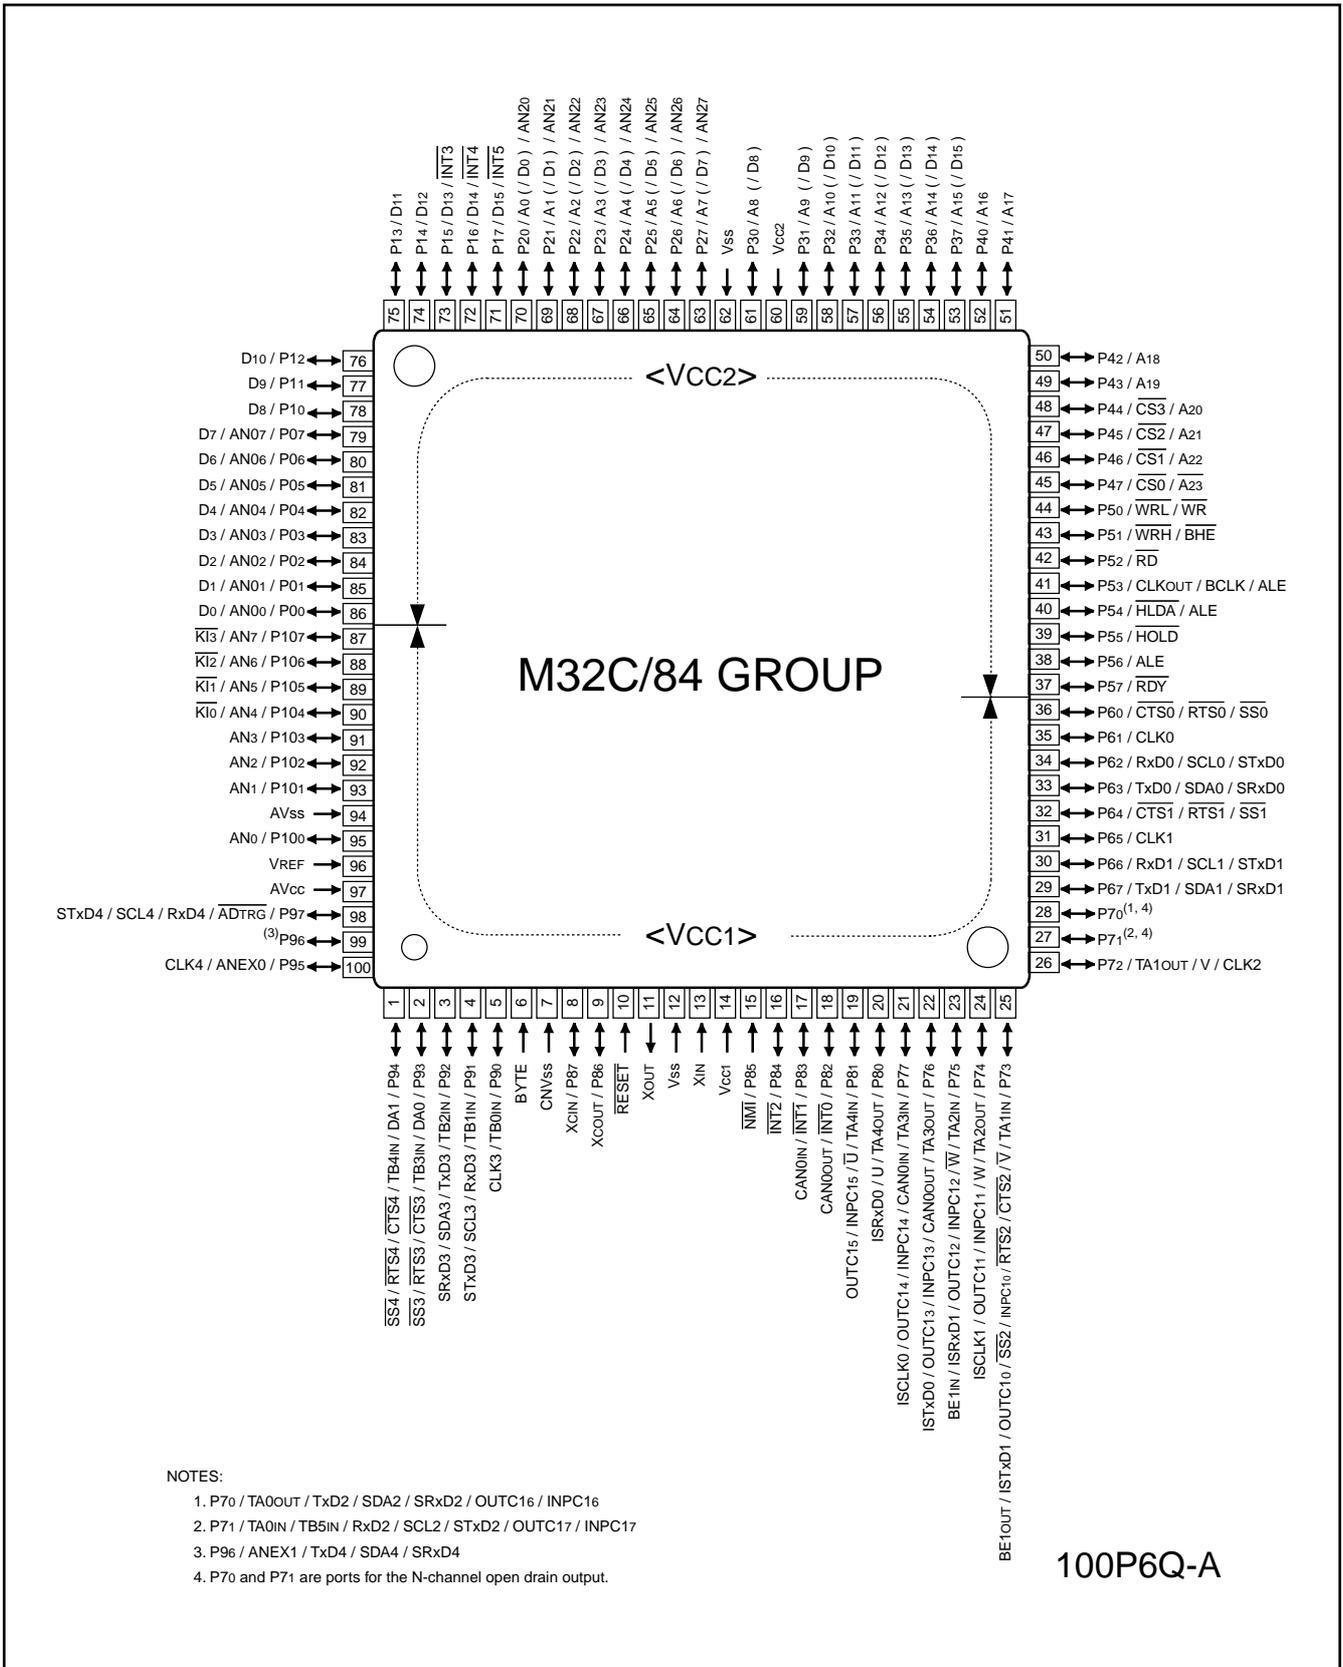


Figure 1.6 Pin Assignment for 100-Pin Package

**Table 1.5 Pin Characteristics for 100-Pin Package**

Package Pin No		Control pin	Port	Interrupt pin	Timer pin	UART/CAN pin	Intelligent I/O pin	Analog pin	Bus control pin
FP	GP								
1	99		P96			TxD4/SDA4/SRxD4		ANEX1	
2	100		P95			CLK4		ANEX0	
3	1		P94		TB4IN	CTS4/RTS4/SS4		DA1	
4	2		P93		TB3IN	CTS3/RTS3/SS3		DA0	
5	3		P92		TB2IN	TxD3/SDA3/SRxD3			
6	4		P91		TB1IN	RxD3/SCL3/STxD3			
7	5		P90		TB0IN	CLK3			
8	6	BYTE							
9	7	CNVss							
10	8	XcIN	P87						
11	9	XcOUT	P86						
12	10	RESET							
13	11	XOUT							
14	12	Vss							
15	13	XIN							
16	14	VCC1							
17	15		P85	NMI					
18	16		P84	INT2					
19	17		P83	INT1		CAN0IN			
20	18		P82	INT0		CAN0OUT			
21	19		P81	TA4IN/U			INPC15/OUTC15		
22	20		P80	TA4OUT/U			ISRxD0		
23	21		P77	TA3IN	CAN0IN		INPC14/OUTC14/ISCLK0		
24	22		P76	TA3OUT	CAN0OUT		INPC13/OUTC13/ISTxD0		
25	23		P75	TA2IN/W			INPC12/OUTC12/ISRxD1/BE1IN		
26	24		P74	TA2OUT/W			INPC11/OUTC11/ISCLK1		
27	25		P73	TA1IN/V	CTS2/RTS2/SS2		INPC10/OUTC10/ISTxD1/BE1OUT		
28	26		P72	TA1OUT/V	CLK2				
29	27		P71	TB5IN/TA0IN	RxD2/SCL2/STxD2		INPC17/OUTC17		
30	28		P70	TA0OUT	TxD2/SDA2/SRxD2		INPC16/OUTC16		
31	29		P67		TxD1/SDA1/SRxD1				
32	30		P66		RxD1/SCL1/STxD1				
33	31		P65		CLK1				
34	32		P64		CTS1/RTS1/SS1				
35	33		P63		TxD0/SDA0/SRxD0				
36	34		P62		RxD0/SCL0/STxD0				
37	35		P61		CLK0				
38	36		P60		CTS0/RTS0/SS0				
39	37		P57						RDY
40	38		P56						ALE
41	39		P55						HOLD
42	40		P54						HLDA/ALE
43	41		P53						CLKout/BCLK/ALE
44	42		P52						RD
45	43		P51						WRH/BHE
46	44		P50						WRL/WR
47	45		P47						CS0/A23
48	46		P46						CS1/A22
49	47		P45						CS2/A21
50	48		P44						CS3/A20

**Table 1.5 Pin Characteristics for 100-Pin Package (Continued)**

Package pin No		Control pin	Port	Interrupt pin	Timer pin	UART/CAN pin	Intelligent I/O pin	Analog pin	Bus control pin
FP	GP								
51	49		P43					A19	
52	50		P42					A18	
53	51		P41					A17	
54	52		P40					A16	
55	53		P37					A15/(D15)	
56	54		P36					A14/(D14)	
57	55		P35					A13/(D13)	
58	56		P34					A12/(D12)	
59	57		P33					A11/(D11)	
60	58		P32					A10/(D10)	
61	59		P31					A9/(D9)	
62	60	VCC2							
63	61		P30					A8/(D8)	
64	62	VSS							
65	63		P27				AN27	A7/(D7)	
66	64		P26				AN26	A6/(D6)	
67	65		P25				AN25	A5/(D5)	
68	66		P24				AN24	A4/(D4)	
69	67		P23				AN23	A3/(D3)	
70	68		P22				AN22	A2/(D2)	
71	69		P21				AN21	A1/(D1)	
72	70		P20				AN20	A0/(D0)	
73	71		P17	INT5				D15	
74	72		P16	INT4				D14	
75	73		P15	INT3				D13	
76	74		P14					D12	
77	75		P13					D11	
78	76		P12					D10	
79	77		P11					D9	
80	78		P10					D8	
81	79		P07				AN07	D7	
82	80		P06				AN06	D6	
83	81		P05				AN05	D5	
84	82		P04				AN04	D4	
85	83		P03				AN03	D3	
86	84		P02				AN02	D2	
87	85		P01				AN01	D1	
88	86		P00				AN00	D0	
89	87		P107	KI3			AN7		
90	88		P106	KI2			AN6		
91	89		P105	KI1			AN5		
92	90		P104	KI0			AN4		
93	91		P103				AN3		
94	92		P102				AN2		
95	93		P101				AN1		
96	94	AVSS							
97	95		P100				AN0		
98	96	VREF							
99	97	AVCC							
100	98		P97			RxD4/SCL4/STxD4	ADTRG		

## 1.6 Pin Description

**Table 1.6 Pin Description (100-Pin and 144-Pin Packages)**

Symbol	Function	I/O type	Supply voltage	Description
Vcc1, Vcc2 Vss	Power supply input	I I	— —	Apply 3.0 to 5.5V to both Vcc1 and Vcc2 pins. Apply 0V to the Vss pin. Vcc1 ≥ Vcc2 <sup>(1)</sup>
CNVss	CNVss	I	VCC1	Switches processor mode. Connect this pin to Vss to start up in single-chip mode (memory expansion mode). Connect this pin to Vcc to start up in microprocessor mode.
RESET	Reset input	I	VCC1	The microcomputer is in a reset state when applying "L" to the RESET pin.
XIN XOUT	Clock input Clock output	I O	VCC1	I/O pins for the main clock generating circuit. Connect a ceramic resonator or crystal oscillator between XIN and XOUT. To use an external clock, input the clock to XIN and leave XOUT open.
BYTE	Input to switch external data bus width	I	VCC1	Switches the data bus in external memory space 3. The data bus is 16 bits wide when the BYTE pin is held "L" and 8 bits wide when the BYTE pin is held "H". Set to either. Connect this pin to Vss when an external bus is not used.
AVcc	Analog power supply input	I	—	Applies power supply for the A-D converter and D-A converter. Connect this pin to VCC1.
AVss	Analog power supply input	I	—	Applies power supply for the A-D converter and D-A converter. Connect this pin to Vss.
VREF	Reference voltage input	I	—	Applies reference voltage for the A-D converter.
P00 to P07	I/O port P0	I/O	VCC2	8-bit I/O ports in CMOS having a direction register to select input or output. Each pin is set as an input port or output port. An input port in single-chip mode can be set for a pull-up or for no pull-up in 4-bit unit by program. When these pins are used as bus control pins in memory expansion mode and microprocessor mode, internal pull-up resistor cannot be selected. Ports used as input ports can be set for a pull-up or for no pull-up in the modes above.
D0 to D7	Data bus	I/O		Inputs and outputs data (D0 to D7) when these pins are set as the separate bus.
AN00 to AN07	Analog input pin	I		Analog input pins for the A-D converter
P10 to P17	I/O port P1	I/O	VCC2	8-bit I/O ports having equivalent functions to P0
INT3 to INT5	INT interrupt input pin	I		Input pins for the INT interrupt
D8 to D15	Data bus	I/O		Inputs and outputs data (D8 to D15) when these pins are set as the separate bus.
P20 to P27	I/O port P2	I/O	VCC2	8-bit I/O ports having equivalent functions to P0
A0 to A7	Address bus	O		Outputs 8 low-order address bits (A0 to A7).
A0/D0 to A7/D7	Address bus/data bus	I/O		Inputs and outputs data (D0 to D7) and outputs 8 low-order address bits (A0 to A7) by time-sharing when these pins are set as the multiplexed bus.
AN20 to AN27	Analog input pin	I		Analog input pins for A-D converter
P30 to P37	I/O port P3	I/O	VCC2	8-bit I/O ports having equivalent functions to P0
A8 to A15	Address bus	O		Outputs 8 middle-order address bits (A8 to A15).
A8/D8 to A15/D15	Address bus/data bus	I/O		Inputs and outputs data (D8 to D15) and outputs 8 middle-order address bits (A8 to A15) by time-sharing when external 16-bit data bus is set as the multiplexed bus.
P40 to P47	I/O port P4	I/O	VCC2	8-bit I/O ports having equivalent functions to P0
A16 to A22, A23	Address bus	O		Outputs 8 high-order address bits (A16 to A22, A23). The highest-order bit (A23) inverted is also output.
CS0 to CS3	Chip-select	O		Output CS0 to CS3 signals. CS0 to CS3 are chip-select signals specifying an external space.

I : Input    O : Output    I/O : Input and output

**NOTES:**

1. In this manual, hereafter, Vcc refers to Vcc1 unless otherwise noted.

**Table 1.6 Pin Description (100-Pin and 144-Pin Packages) (Continued)**

Symbol	Function	I/O type	Supply voltage	Description
P50 to P57	I/O port P5	I/O	VCC2	8-bit I/O ports having equivalent functions to P0
CLKOUT	Clock output	O		Outputs the main clock divided by 8 or divided by 32 or the clock having the same frequency as the sub clock from P53.
WRL	Bus control pin	O	VCC2	Output WRL, WRH, (WR, BHE), RD, BCLK, HLDA and ALE signals. WRL and WRH or BHE and WR can be switched by program. ■ WRL, WRH and RD are selected The WRL signal becomes "L" by writing data to an even address in an external memory space. The WRH signal becomes "L" by writing data to an odd address in an external memory space. The RD pin signal becomes "L" by reading data in an external memory space. ■ WR, BHE and RD are selected The WR signal becomes "L" by writing data to an external memory space. The RD signal becomes "L" by reading data in an external memory space. The BHE signal becomes "L" by accessing an odd address. Select WR, BHE and RD for an external 8-bit data bus. While the HOLD pin is held "L", the microcomputer is placed in a hold state. In a hold state, HLDA outputs a "L" signal. ALE is a signal latching the address. While the RDY pin is held "L", the microcomputer is placed in a wait state.
WR		O		
WRH		O		
BHE		O		
RD		O		
BCLK		O		
HLDA		O		
HOLD		I		
ALE		O		
RDY		I		
P60 to P67		I/O port P6		
CTS0, CTS1	UART pin	I	VCC1	I/O pins for UART0 (P60 to P63) and UART1 (P64 to P67)
RTS0, RTS1		O		
SS0, SS1		I		
CLK0, CLK1		I/O		
RxD0, RxD1		I		
SCL0, SCL1		I/O		
STxD0, STxD1		O		
TxD0, TxD1		O		
SDA0, SDA1		I/O		
SRxD0, SRxD1		I		

I : Input    O : Output    I/O : Input and output

**Table 1.6 Pin Description (100-Pin and 144-Pin Packages) (Continued)**

Symbol	Function	I/O type	Supply voltage	Description		
P70 to P77	I/O port P7	I/O	VCC1	8-bit I/O ports having equivalent functions to P0 (P70 and P71 are ports for the N-channel open drain output.)		
TA0OUT to TA3OUT TA0IN to TA3IN	Timer A pin	I/O I		I/O pins for timers A0 to A3		
TB5IN	Timer B pin	I		Input pin for timer B5		
V, $\bar{V}$	Three-phase motor control output pin	O		V-phase output pin		
W, $\bar{W}$		O		W-phase output pin		
CTS2 RTS2 SS2 CLK2 RxD2 SCL2 STxD2 TxD2 SDA2 SRxD2	UART pin	I O I I/O I I/O O O I/O I		I/O pins for UART2		
INPC10 to INPC14 INPC16, INPC17 OUTC10 to OUTC14 OUTC16, OUTC17 ISCLK0, ISCLK1 ISTxD0, ISTxD1 ISRxD1 BE1OUT BE1IN		Intelligent I/O pin	I I O O I/O O I O I		INPC10 to INPC14, INPC16 and INPC17 are input pins for the time measurement function. OUTC10 to OUTC14, OUTC16 and OUTC17 are output pins for the waveform generating function. ISCLK0 and ISCLK1 input and output the clock for the intelligent I/O communication function. ISRxD1 and BE1IN input received data for the intelligent I/O communication function. ISTxD0, ISTxD1 and BE1OUT output transmit data for the intelligent I/O communication function.	
CAN0OUT CAN0IN			CAN pin	O I		I/O pins for the CAN communication function
P80 to P84, P86, P87				I/O port P8	I/O	VCC1
XCIN XCOUT			Sub clock			
TA4OUT TA4IN				Timer A pin	I/O I	
U, $\bar{U}$			Three-phase motor control output pin		O	
INT0 to INT2				INT interrupt input pin	I	
INPC15 OUTC15 ISRxD0			Intelligent I/O pin		I O I	
CAN0OUT CAN0IN				CAN pin	O I	
P85/NMI	NMI interrupt input pin				I	

I : Input    O : Output    I/O : Input and output

**Table 1.6 Pin Description (100-Pin and 144-Pin Packages) (Continued)**

Symbol	Function	I/O type	Supply voltage	Description		
P90 to P97	I/O port P9	I/O	VCC1	8-bit I/O ports having equivalent functions P0. The PRCR register prevents PD9 and PS3 registers from rewriting.		
TB0IN to TB4IN	Timer B pin	I		Input pins for timers B0 to B4		
CTS3, CTS4	UART pin	I		I/O pins for UART3 (P90 to P93) and UART4 (P94 to P97)		
RTS3, RTS4		O				
SS3, SS4		I				
CLK3, CLK4		I/O				
RxD3, RxD4		I				
SCL3, SCL4		I/O				
STxD3, STxD4		O				
TxD3, TxD4		O				
SDA3, SDA4		I/O				
SRxD3, SRxD4		I				
DA0, DA1		D-A output pin			O	Output pins for the D-A converter
ANEX0,		A-D related pin			I/O	ANEX0 is an extended analog I/O pin for the A-D converter.
ANEX1,	I		ANEX1 is an extended analog input pin for the A-D converter.			
ADTRG	I		ADTRG is an A-D trigger input pin.			
P100 to P107	I/O port P10	I/O	VCC1	8-bit I/O ports having equivalent functions to P0		
KI0 to KI3	Key input interrupt pin	I		Input pins for the key input interrupt		
AN0 to AN7	Analog input pin	I		Analog input pins for the A-D converter		

I : Input    O : Output    I/O : Input and output

**Table 1.6 Pin Description (144-Pin Package only) (Continued)**

Symbol	Function	I/O type	Supply voltage	Description
P110 to P114	I/O port P11	I/O	Vcc2	5-bit I/O ports having equivalent functions to P0.
INPC10 to INPC13	Intelligent I/O pin	I	Vcc2	INPC10 to INPC13 are input pins for the time measurement function.
OUTC10 to OUTC13		O		OUTC10 to OUTC13 are output pins for the waveform generating function.
ISCLK1		I/O		ISCLK1 inputs and outputs the clock and is an I/O pin for the intelligent I/O communication function.
ISTxD1		O		ISTxD1 and BE1IN input received data for the intelligent I/O communication function.
ISRxD1		I		
BE1OUT		O		
BE1IN		I		
P120 to P127		I/O port P12		I/O
P130 to P137	I/O port P13	I/O	Vcc2	8-bit I/O ports having equivalent functions to P0
P140 to P147	I/O port P14	I/O	Vcc1	8-bit I/O ports having equivalent functions to P0
INPC14 to INPC17	Intelligent I/O pin	I	Vcc1	INPC14 to INPC17 are input pins for the time measurement function.
OUTC14 to OUTC17		O		OUTC14 to OUTC17 are output pins for the waveform generating function.
P150 to P157	I/O port P15	I/O	Vcc1	8-bit I/O ports having equivalent functions to P0
AN150 to AN157	Analog input port	I		Analog input pins for the A-D converter
ISCLK0	Intelligent I/O pin	I/O		ISCLK0 inputs and outputs the clock for the intelligent I/O communication function.
ISRxD0		I		ISRxD0 inputs received data for the intelligent I/O communication function.
ISTxD0		O		
			ISTxD0 outputs transmit data for the intelligent I/O communication function.	

I : Input    O : Output    I/O : Input and output

## 2. Central Processing Unit (CPU)

Figure 2.1 shows the CPU registers.

A register bank comprises 8 registers (R0, R1, R2, R3, A0, A1, SB and FB) out of 28 CPU registers. Two sets of register banks are provided.

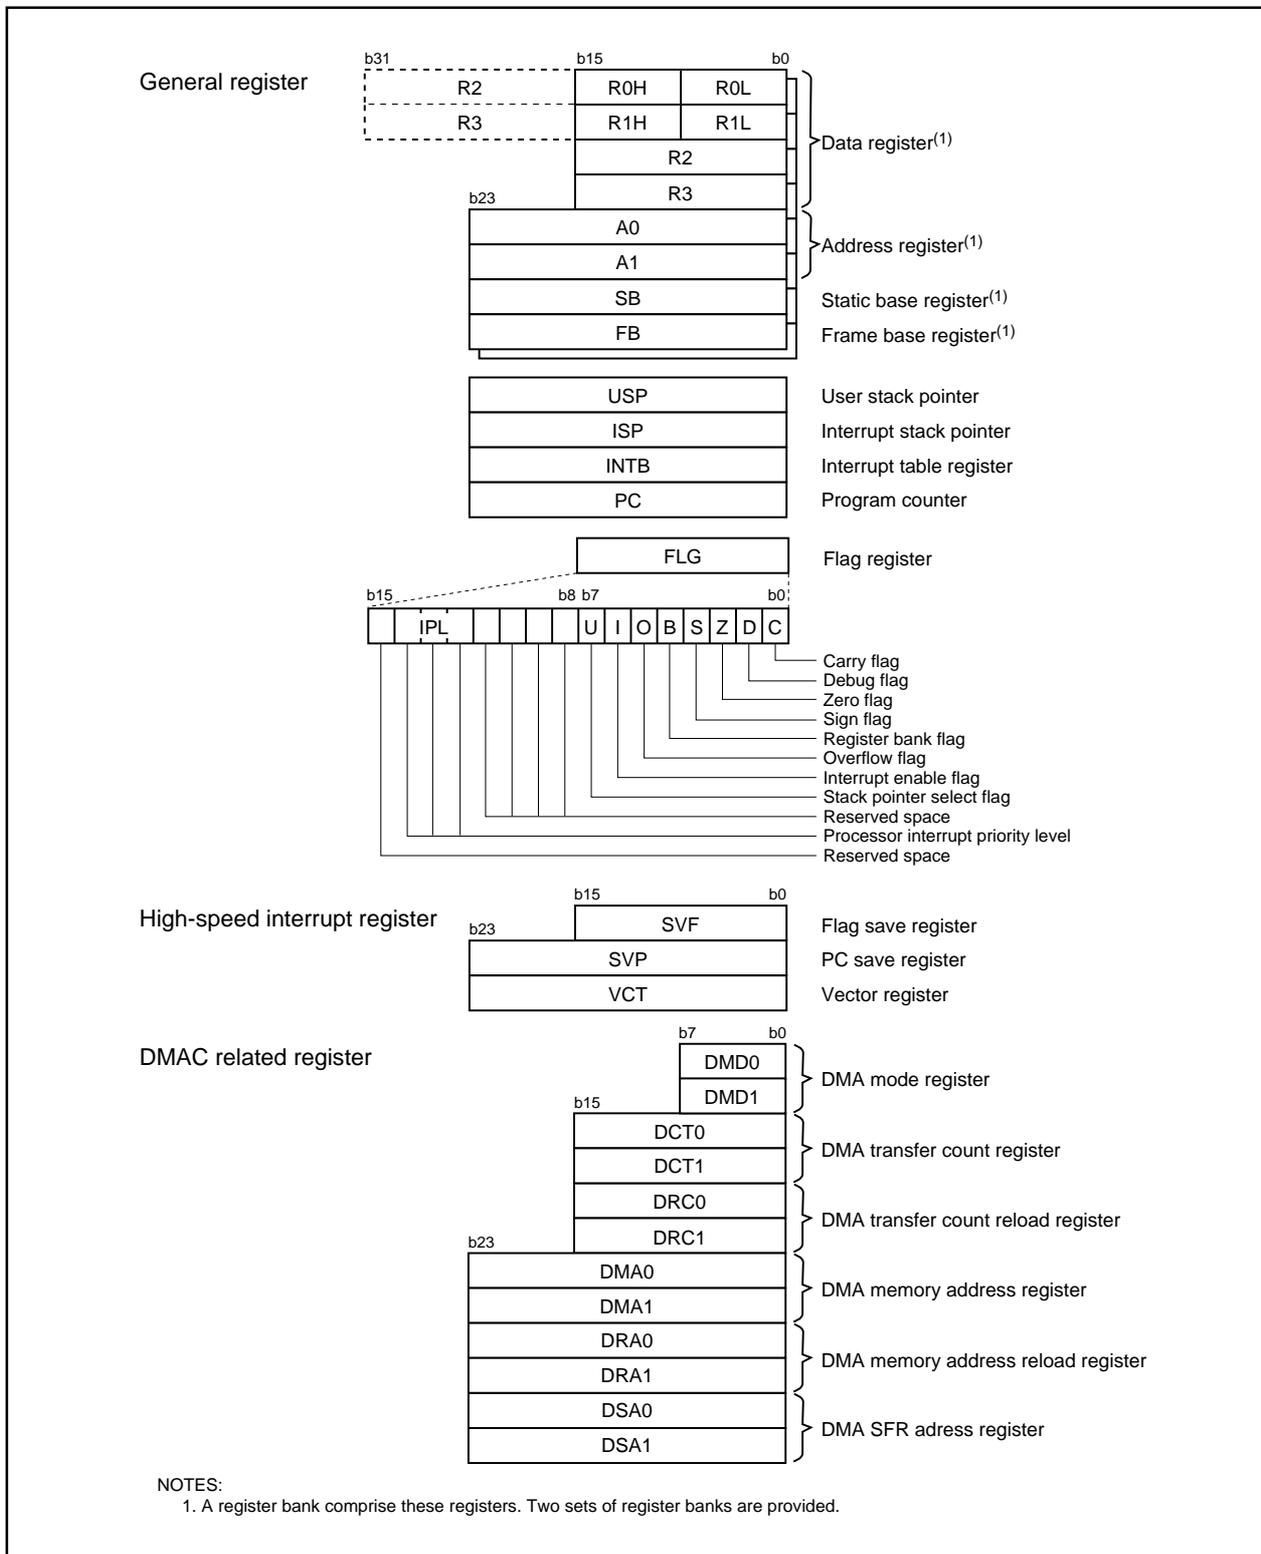


Figure 2.1 CPU Register

## 2.1 General Register

### 2.1.1 Data Registers (R0, R1, R2 and R3)

R0, R1, R2 and R3 are 16-bit registers for transfer, arithmetic and logic operations. R0 and R1 can be split into high-order bits (R0H) and low-order bits (R0L) to be used separately as 8-bit data registers. R0 can be combined with R2 to be used as a 32-bit data register (R2R0). The same applies to R3R1.

### 2.1.2 Address Registers (A0 and A1)

A0 and A1 are 24-bit registers for A0-/A1-indirect addressing, A0-/A1-relative addressing, transfer, arithmetic and logic operations.

### 2.1.3 Static Base Register (SB)

SB is a 24-bit register for SB-relative addressing.

### 2.1.4 Frame Base Register (FB)

FB is a 24-bit register for FB-relative addressing.

### 2.1.5 Program Counter (PC)

PC is 24 bits wide. It indicates an address of an instruction to be executed.

### 2.1.6 Interrupt Table Register (INTB)

INTB is a 24-bit register indicating a starting address of an interrupt vector table.

### 2.1.7 User Stack Pointer (USP), Interrupt Stack Pointer (ISP)

USP and ISP as the stack pointer are 24 bits wide. The U flag can switch USP to ISP and vice versa. Refer to "2.1.8 Flag Register (FLG)" about the U flag. Set USP and ISP to even addresses to execute an interrupt sequence efficiently.

### 2.1.8 Flag Register (FLG)

FLG is a 16-bit register indicating a CPU state.

#### 2.1.8.1 Carry Flag (C)

The C flag indicates whether carry or borrow occurs after an instruction is executed.

#### 2.1.8.2 Debug Flag (D)

The D flag is for debug only. Set to "0".

#### 2.1.8.3 Zero Flag (Z)

The Z flag is set to "1" when the value of zero is obtained from an arithmetic calculation; otherwise "0".

#### 2.1.8.4 Sign Flag (S)

The S flag is set to "1" when a negative value is obtained from an arithmetic calculation; otherwise "0".

#### 2.1.8.5 Register Bank Select Flag (B)

The register bank 0 is selected when the B flag is set to "0". The register bank 1 is selected when this flag is set to "1".

#### 2.1.8.6 Overflow Flag (O)

The O flag is set to "1" when a result of an arithmetic operation overflows; otherwise "0".

#### 2.1.8.7 Interrupt Enable Flag (I)

The I flag enables a maskable interrupt.

An interrupt is disabled when the I flag is set to "0" and is enabled when the I flag is set to "1". The I flag is set to "0" when an interrupt is acknowledged.

#### 2.1.8.8 Stack Pointer Select Flag (U)

ISP is selected when the U flag is set to "0". USP is selected when this flag is set to "1".

The U flag is set to "0" when a hardware interrupt is acknowledged or the INT instruction of software interrupt numbers 0 to 31 is executed.

#### 2.1.8.9 Processor Interrupt Priority Level (IPL)

IPL is 3 bits wide. It assigns an interrupt priority levels from level 0 to level 7.

If a requested interrupt has a greater priority than IPL, the interrupt is enabled.

#### 2.1.8.10 Reserved Space

When writing to the reserved space, set to "0". When read, its content is indeterminate.

## 2.2 High-Speed Interrupt Registers

Registers associated with the high-speed interrupt are as follows.

- Flag save register (SVF)
- PC save register (SVP)
- Vector register (VCT)

## 2.3 DMAC-associated Registers

Registers associated with DMAC are as follows.

- DMA mode register (DMD0, DMD1)
- DMA transfer count register (DCT0, DCT1)
- DMA transfer count reload register (DRC0, DRC1)
- DMA memory address register (DMA0, DMA1)
- DMA SFR address register (DSA0, DSA1)
- DMA memory address reload register (DRA0, DRA1)

### 3. Memory

Figure 3.1 shows a memory map of the M32C/85 group.

The M32C/84 provides 16-Mbyte address space from addresses 000000<sub>16</sub> to FFFFFFF<sub>16</sub>.

The internal ROM is allocated in lower addresses beginning with address FFFFFFF<sub>16</sub>. For example, a 64-Kbyte internal ROM is allocated in addresses FF0000<sub>16</sub> to FFFFFFF<sub>16</sub>.

The fixed interrupt vectors are allocated in addresses FFFFDC<sub>16</sub> to FFFFFFF<sub>16</sub>. It stores the starting address of each interrupt routine.

The internal RAM is allocated in higher addresses beginning with address 000400<sub>16</sub>. For example, a 10-Kbyte internal RAM is allocated in addresses 000400<sub>16</sub> to 002BFF<sub>16</sub>. Besides storing data, it becomes stacks when the subroutine is called or an interrupt is acknowledged.

The SFR is allocated in addresses 000000<sub>16</sub> to 0003FF<sub>16</sub>. The control registers for peripheral functions such as I/O port, A-D conversion, serial I/O, timer are allocated here. All addresses, which have nothing allocated within the SFR, are reserved space and cannot be accessed by users.

The special page vectors are allocated in addresses FFFE00<sub>16</sub> to FFFFDB<sub>16</sub>. It is used for the JMPS instruction and JSRS instruction. Refer to the Renesas publication **Software Manual** for details.

In memory expansion mode and microprocessor mode, some space are reserved and cannot be accessed by users.

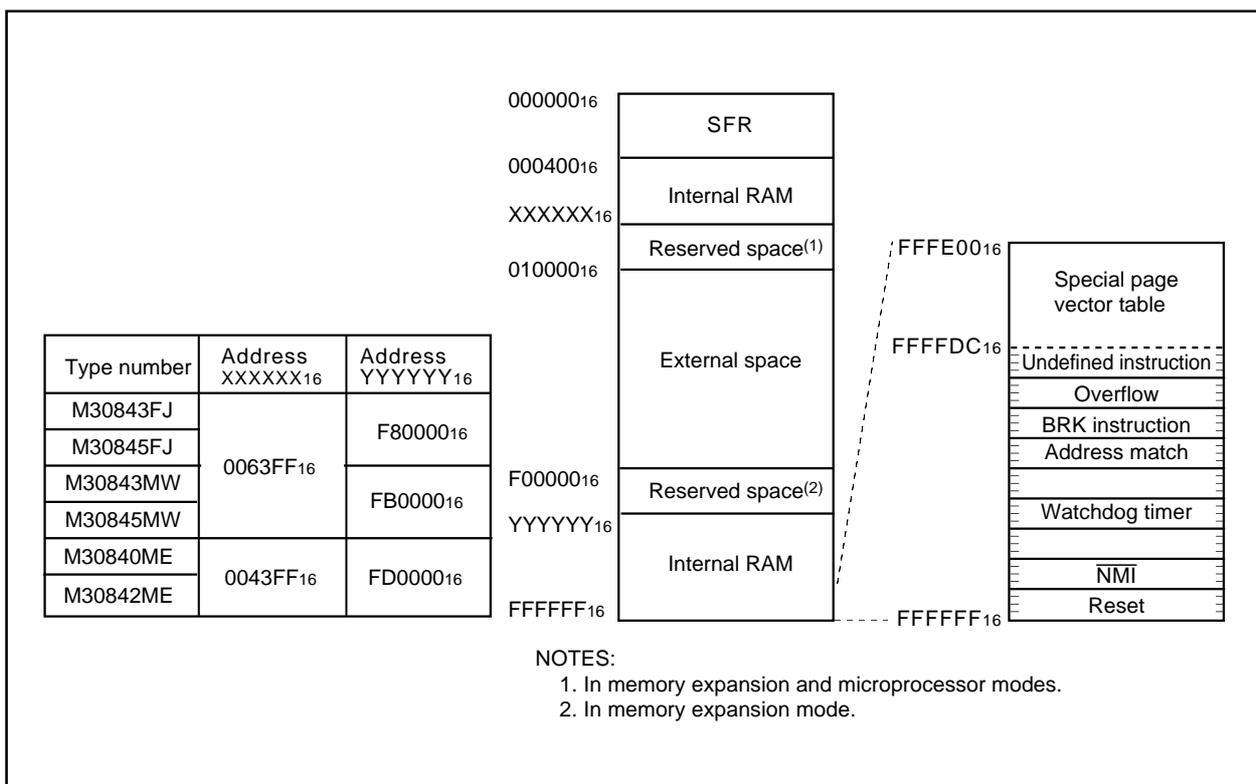


Figure 3.1 Memory Map

## 4. Special Function Registers (SFR)

Address	Register	Symbol	Value after RESET
0000 <sub>16</sub>			
0001 <sub>16</sub>			
0002 <sub>16</sub>			
0003 <sub>16</sub>			
0004 <sub>16</sub>	Processor mode register 0	PM0	1000 0000 <sub>2</sub> (CNVss pin ="L") 0000 0011 <sub>2</sub> (CNVss pin ="H")
0005 <sub>16</sub>	Processor mode register 1	PM1	0X00 0000 <sub>2</sub>
0006 <sub>16</sub>	System clock control register 0	CM0	0000 1000 <sub>2</sub>
0007 <sub>16</sub>	System clock control register 1	CM1	0010 0000 <sub>2</sub>
0008 <sub>16</sub>			
0009 <sub>16</sub>	Address match interrupt enable register	AIER	00 <sub>16</sub>
000A <sub>16</sub>	Protect register	PRCR	XXXX 0000 <sub>2</sub>
000B <sub>16</sub>	External data bus width control register	DS	XXXX 1000 <sub>2</sub> (BYTE pin ="L") XXXX 0000 <sub>2</sub> (BYTE pin ="H")
000C <sub>16</sub>	Main clock division register	MCD	XXX0 1000 <sub>2</sub>
000D <sub>16</sub>	Oscillation stop detect register	CM2	00 <sub>16</sub>
000E <sub>16</sub>	Watchdog timer start register	WDTS	XX <sub>16</sub>
000F <sub>16</sub>	Watchdog timer control register	WDC	000X XXXX <sub>2</sub>
0010 <sub>16</sub>			
0011 <sub>16</sub>	Address match interrupt register 0	RMAD0	000000 <sub>16</sub>
0012 <sub>16</sub>			
0013 <sub>16</sub>	Processor mode register 2	PM2	XXX0 0000 <sub>2</sub>
0014 <sub>16</sub>			
0015 <sub>16</sub>	Address match interrupt register 1	RMAD1	000000 <sub>16</sub>
0016 <sub>16</sub>			
0017 <sub>16</sub>	Voltage detection register 2	VCR2	00 <sub>16</sub>
0018 <sub>16</sub>			
0019 <sub>16</sub>	Address match interrupt register 2	RMAD2	000000 <sub>16</sub>
001A <sub>16</sub>			
001B <sub>16</sub>	Voltage detection register 1	VCR1	0000 1000 <sub>2</sub>
001C <sub>16</sub>			
001D <sub>16</sub>	Address match interrupt register 3	RMAD3	000000 <sub>16</sub>
001E <sub>16</sub>			
001F <sub>16</sub>			
0020 <sub>16</sub>			
0021 <sub>16</sub>			
0022 <sub>16</sub>			
0023 <sub>16</sub>			
0024 <sub>16</sub>			
0025 <sub>16</sub>			
0026 <sub>16</sub>	PLL control register 0	PLC0	0001 X010 <sub>2</sub>
0027 <sub>16</sub>	PLL control register 1	PLC1	000X 0000 <sub>2</sub>
0028 <sub>16</sub>			
0029 <sub>16</sub>	Address match interrupt register 4	RMAD4	000000 <sub>16</sub>
002A <sub>16</sub>			
002B <sub>16</sub>			
002C <sub>16</sub>			
002D <sub>16</sub>	Address match interrupt register 5	RMAD5	000000 <sub>16</sub>
002E <sub>16</sub>			
002F <sub>16</sub>	Voltage down detect interrupt register	D4INT	XX00 0000 <sub>2</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0030 <sub>16</sub>			
0031 <sub>16</sub>			
0032 <sub>16</sub>			
0033 <sub>16</sub>			
0034 <sub>16</sub>			
0035 <sub>16</sub>			
0036 <sub>16</sub>			
0037 <sub>16</sub>			
0038 <sub>16</sub> 0039 <sub>16</sub> 003A <sub>16</sub> 003B <sub>16</sub>	Address match interrupt register 6	RMAD6	000000 <sub>16</sub>
003C <sub>16</sub> 003D <sub>16</sub> 003E <sub>16</sub> 003F <sub>16</sub>	Address match interrupt register 7	RMAD7	000000 <sub>16</sub>
0040 <sub>16</sub>			
0041 <sub>16</sub>			
0042 <sub>16</sub>			
0043 <sub>16</sub>			
0044 <sub>16</sub>			
0045 <sub>16</sub>			
0046 <sub>16</sub>			
0047 <sub>16</sub>			
0048 <sub>16</sub>	External space wait control register 0	EWCR0	X0X0 0011 <sub>2</sub>
0049 <sub>16</sub>	External space wait control register 1	EWCR1	X0X0 0011 <sub>2</sub>
004A <sub>16</sub>	External space wait control register 2	EWCR1	X0X0 0011 <sub>2</sub>
004B <sub>16</sub>	External space wait control register 3	EWCR3	X0X0 0011 <sub>2</sub>
004C <sub>16</sub>	Page mode wait control register 0	PWCR0	0001 0001 <sub>2</sub>
004D <sub>16</sub>	Page mode wait control register 1	PWCR1	0001 0001 <sub>2</sub>
004E <sub>16</sub>			
004F <sub>16</sub>			
0050 <sub>16</sub>			
0051 <sub>16</sub>			
0052 <sub>16</sub>			
0053 <sub>16</sub>			
0054 <sub>16</sub>			
0055 <sub>16</sub> 0056 <sub>16</sub>	Flash memory control register 1	FMR1	0000 0101 <sub>2</sub>
0057 <sub>16</sub> 0058 <sub>16</sub> 0059 <sub>16</sub>	Flash memory control register 0	FMR0	0000 0001 <sub>2</sub>
005A <sub>16</sub>			
005B <sub>16</sub>			
005C <sub>16</sub>			
005D <sub>16</sub>			
005E <sub>16</sub>			
005F <sub>16</sub>			

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0060 <sub>16</sub>			
0061 <sub>16</sub>			
0062 <sub>16</sub>			
0063 <sub>16</sub>			
0064 <sub>16</sub>			
0065 <sub>16</sub>			
0066 <sub>16</sub>			
0067 <sub>16</sub>			
0068 <sub>16</sub>	DMA0 interrupt control register	DM0IC	XXXX X000 <sub>2</sub>
0069 <sub>16</sub>	Timer B5 interrupt control register	TB5IC	XXXX X000 <sub>2</sub>
006A <sub>16</sub>	DMA2 interrupt control register	DM2IC	XXXX X000 <sub>2</sub>
006B <sub>16</sub>	UART2 receive /ACK interrupt control register	S2RIC	XXXX X000 <sub>2</sub>
006C <sub>16</sub>	Timer A0 interrupt control register	TA0IC	XXXX X000 <sub>2</sub>
006D <sub>16</sub>	UART3 receive /ACK interrupt control register	S3RIC	XXXX X000 <sub>2</sub>
006E <sub>16</sub>	Timer A2 interrupt control register	TA2IC	XXXX X000 <sub>2</sub>
006F <sub>16</sub>	UART4 receive /ACK interrupt control register	S4RIC	XXXX X000 <sub>2</sub>
0070 <sub>16</sub>	Timer A4 interrupt control register	TA4IC	XXXX X000 <sub>2</sub>
0071 <sub>16</sub>	UART0/UART3 bus conflict detect interrupt control register	BCN0IC/BCN3IC	XXXX X000 <sub>2</sub>
0072 <sub>16</sub>	UART0 receive/ACK interrupt control register	S0RIC	XXXX X000 <sub>2</sub>
0073 <sub>16</sub>	A-D0 conversion interrupt control register	AD0IC	XXXX X000 <sub>2</sub>
0074 <sub>16</sub>	UART1 receive/ACK interrupt control register	S1RIC	XXXX X000 <sub>2</sub>
0075 <sub>16</sub>	Intelligent I/O interrupt control register 0	IIO0IC	XXXX X000 <sub>2</sub>
0076 <sub>16</sub>	Timer B1 interrupt control register	TB1IC	XXXX X000 <sub>2</sub>
0077 <sub>16</sub>	Intelligent I/O interrupt control register 2	IIO2IC	XXXX X000 <sub>2</sub>
0078 <sub>16</sub>	Timer B3 interrupt control register	TB3IC	XXXX X000 <sub>2</sub>
0079 <sub>16</sub>	Intelligent I/O interrupt control register 4	IIO4IC	XXXX X000 <sub>2</sub>
007A <sub>16</sub>	INT5 interrupt control register	INT5IC	XX00 X000 <sub>2</sub>
007B <sub>16</sub>			
007C <sub>16</sub>	INT3 interrupt control register	INT3IC	XX00 X000 <sub>2</sub>
007D <sub>16</sub>	Intelligent I/O interrupt control register 8	IIO8IC	XXXX X000 <sub>2</sub>
007E <sub>16</sub>	INT1 interrupt control register	INT1IC	XX00 X000 <sub>2</sub>
007F <sub>16</sub>	Intelligent I/O interrupt control register 10/ CAN interrupt 1 control register	IIO10IC/ CAN1IC	XXXX X000 <sub>2</sub>
0080 <sub>16</sub>			
0081 <sub>16</sub>	CAN interrupt 2 control register	CAN2IC	XXXX X000 <sub>2</sub>
0082 <sub>16</sub>			
0083 <sub>16</sub>			
0084 <sub>16</sub>			
0085 <sub>16</sub>			
0086 <sub>16</sub>			
0087 <sub>16</sub>			
0088 <sub>16</sub>	DMA1 interrupt control register	DM1IC	XXXX X000 <sub>2</sub>
0089 <sub>16</sub>	UART2 transmit /NACK interrupt control register	S2TIC	XXXX X000 <sub>2</sub>
008A <sub>16</sub>	DMA3 interrupt control register	DM3IC	XXXX X000 <sub>2</sub>
008B <sub>16</sub>	UART3 transmit /NACK interrupt control register	S3TIC	XXXX X000 <sub>2</sub>
008C <sub>16</sub>	Timer A1 interrupt control register	TA1IC	XXXX X000 <sub>2</sub>
008D <sub>16</sub>	UART4 transmit /NACK interrupt control register	S4TIC	XXXX X000 <sub>2</sub>
008E <sub>16</sub>	Timer A3 interrupt control register	TA3IC	XXXX X000 <sub>2</sub>
008F <sub>16</sub>	UART2 bus conflict detect interrupt control register	BCN2IC	XXXX X000 <sub>2</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0090 <sub>16</sub>	UART0 transmit /NACK interrupt control register	S0TIC	XXXX X000 <sub>2</sub>
0091 <sub>16</sub>	UART1/UART4 bus conflict detect interrupt control register	BCN11C/BCN41C	XXXX X000 <sub>2</sub>
0092 <sub>16</sub>	UART1 transmit/NACK interrupt control register	S1TIC	XXXX X000 <sub>2</sub>
0093 <sub>16</sub>	Key input interrupt control register	KUPIC	XXXX X000 <sub>2</sub>
0094 <sub>16</sub>	Timer B0 interrupt control register	TB01C	XXXX X000 <sub>2</sub>
0095 <sub>16</sub>	Intelligent I/O interrupt control register 1	IIO11C	XXXX X000 <sub>2</sub>
0096 <sub>16</sub>	Timer B2 interrupt control register	TB21C	XXXX X000 <sub>2</sub>
0097 <sub>16</sub>	Intelligent I/O interrupt control register 3	IIO31C	XXXX X000 <sub>2</sub>
0098 <sub>16</sub>	Timer B4 interrupt control register	TB41C	XXXX X000 <sub>2</sub>
0099 <sub>16</sub>			
009A <sub>16</sub>	INT4 interrupt control register	INT41C	XX00 X000 <sub>2</sub>
009B <sub>16</sub>			
009C <sub>16</sub>	INT2 interrupt control register	INT21C	XX00 X000 <sub>2</sub>
009D <sub>16</sub>	Intelligent I/O interrupt control register 9/ CAN interrupt 0 control register	IIO91C CAN01C	XXXX X000 <sub>2</sub>
009E <sub>16</sub>	INT0 interrupt control register	INT01C	XX00 X000 <sub>2</sub>
009F <sub>16</sub>	Exit priority control register	RLVL	XXXX 0000 <sub>2</sub>
00A0 <sub>16</sub>	Interrupt request register 0	IIO01R	0000 000X <sub>2</sub>
00A1 <sub>16</sub>	Interrupt request register 1	IIO11R	0000 000X <sub>2</sub>
00A2 <sub>16</sub>	Interrupt request register 2	IIO21R	0000 000X <sub>2</sub>
00A3 <sub>16</sub>	Interrupt request register 3	IIO31R	0000 000X <sub>2</sub>
00A4 <sub>16</sub>	Interrupt request register 4	IIO41R	0000 000X <sub>2</sub>
00A5 <sub>16</sub>			
00A6 <sub>16</sub>			
00A7 <sub>16</sub>			
00A8 <sub>16</sub>	Interrupt request register 8	IIO81R	0000 000X <sub>2</sub>
00A9 <sub>16</sub>	Interrupt request register 9	IIO91R	0000 000X <sub>2</sub>
00AA <sub>16</sub>	Interrupt request register 10	IIO101R	0000 000X <sub>2</sub>
00AB <sub>16</sub>	Interrupt request register 11	IIO111R	0000 000X <sub>2</sub>
00AC <sub>16</sub>			
00AD <sub>16</sub>			
00AE <sub>16</sub>			
00AF <sub>16</sub>			
00B0 <sub>16</sub>	Interrupt enable register 0	IIO01E	00 <sub>16</sub>
00B1 <sub>16</sub>	Interrupt enable register 1	IIO11E	00 <sub>16</sub>
00B2 <sub>16</sub>	Interrupt enable register 2	IIO21E	00 <sub>16</sub>
00B3 <sub>16</sub>	Interrupt enable register 3	IIO31E	00 <sub>16</sub>
00B4 <sub>16</sub>	Interrupt enable register 4	IIO41E	00 <sub>16</sub>
00B5 <sub>16</sub>			
00B6 <sub>16</sub>			
00B7 <sub>16</sub>			
00B8 <sub>16</sub>	Interrupt enable register 8	IIO81E	00 <sub>16</sub>
00B9 <sub>16</sub>	Interrupt enable register 9	IIO91E	00 <sub>16</sub>
00BA <sub>16</sub>	Interrupt enable register 10	IIO101E	00 <sub>16</sub>
00BB <sub>16</sub>	Interrupt enable register 11	IIO111E	00 <sub>16</sub>
00BC <sub>16</sub>			
00BD <sub>16</sub>			
00BE <sub>16</sub>			
00BF <sub>16</sub>			

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
00C0 <sub>16</sub>			
00C1 <sub>16</sub>			
00C2 <sub>16</sub>			
00C3 <sub>16</sub>			
00C4 <sub>16</sub>			
00C5 <sub>16</sub>			
00C6 <sub>16</sub>			
00C7 <sub>16</sub>			
00C8 <sub>16</sub>			
00C9 <sub>16</sub>			
00CA <sub>16</sub>			
00CB <sub>16</sub>			
00CC <sub>16</sub>			
00CD <sub>16</sub>			
00CE <sub>16</sub>			
00CF <sub>16</sub>			
00D0 <sub>16</sub>			
00D1 <sub>16</sub>			
00D2 <sub>16</sub>			
00D3 <sub>16</sub>			
00D4 <sub>16</sub>			
00D5 <sub>16</sub>			
00D6 <sub>16</sub>			
00D7 <sub>16</sub>			
00D8 <sub>16</sub>			
00D9 <sub>16</sub>			
00DA <sub>16</sub>			
00DB <sub>16</sub>			
00DC <sub>16</sub>			
00DD <sub>16</sub>			
00DE <sub>16</sub>			
00DF <sub>16</sub>			
00E0 <sub>16</sub>			
00E1 <sub>16</sub>			
00E2 <sub>16</sub>			
00E3 <sub>16</sub>			
00E4 <sub>16</sub>			
00E5 <sub>16</sub>			
00E6 <sub>16</sub>			
00E7 <sub>16</sub>			
00E8 <sub>16</sub> 00E9 <sub>16</sub>	SI/O receive buffer register 0	G0RB	XXXX XXXX <sub>2</sub> XX00 XXXX <sub>2</sub>
00EA <sub>16</sub> 00EB <sub>16</sub>	Transmit buffer/receive data register 0	G0TB	XX <sub>16</sub>
00EC <sub>16</sub>	Receive input register 0	G0RI	XX <sub>16</sub>
00ED <sub>16</sub>	SI/O communication mode register 0	G0MR	00 <sub>16</sub>
00EE <sub>16</sub>	Transmit output register 0	G0TO	XX <sub>16</sub>
00EF <sub>16</sub>	SI/O communication control register 0	G0CR	0000 X011 <sub>2</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
00F0 <sub>16</sub>	Data compare register 00	G0CMP0	XX <sub>16</sub>
00F1 <sub>16</sub>	Data compare register 01	G0CMP1	XX <sub>16</sub>
00F2 <sub>16</sub>	Data compare register 02	G0CMP2	XX <sub>16</sub>
00F3 <sub>16</sub>	Data compare register 03	G0CMP3	XX <sub>16</sub>
00F4 <sub>16</sub>	Data mask register 00	G0MSK0	XX <sub>16</sub>
00F5 <sub>16</sub>	Data mask register 01	G0MSK1	XX <sub>16</sub>
00F6 <sub>16</sub>	Communication clock select register	CCS	XXXX 0000 <sub>2</sub>
00F7 <sub>16</sub>			
00F8 <sub>16</sub> 00F9 <sub>16</sub>	Receive CRC code register 0	G0RCRC	XX <sub>16</sub> XX <sub>16</sub>
00FA <sub>16</sub> 00FB <sub>16</sub>	Transmit CRC code register 0	G0TCRC	00 <sub>16</sub> 00 <sub>16</sub>
00FC <sub>16</sub>	SI/O extended mode register 0	G0EMR	00 <sub>16</sub>
00FD <sub>16</sub>	SI/O extended receive control register 0	G0ERC	00 <sub>16</sub>
00FE <sub>16</sub>	SI/O special communication interrupt detect register 0	G0IRF	0000 00XX <sub>2</sub>
00FF <sub>16</sub>	SI/O extended transmit control register 0	G0ETC	0000 0XXX <sub>2</sub>
0100 <sub>16</sub> 0101 <sub>16</sub>	Time measurement/waveform generating register 10	G1TM0/G1PO0	XX <sub>16</sub> XX <sub>16</sub>
0102 <sub>16</sub> 0103 <sub>16</sub>	Time measurement/waveform generating register 11	G1TM1/G1PO1	XX <sub>16</sub> XX <sub>16</sub>
0104 <sub>16</sub> 0105 <sub>16</sub>	Time measurement/waveform generating register 12	G1TM2/G1PO2	XX <sub>16</sub> XX <sub>16</sub>
0106 <sub>16</sub> 0107 <sub>16</sub>	Time measurement/waveform generating register 13	G1TM3/G1PO3	XX <sub>16</sub> XX <sub>16</sub>
0108 <sub>16</sub> 0109 <sub>16</sub>	Time measurement/waveform generating register 14	G1TM4/G1PO4	XX <sub>16</sub> XX <sub>16</sub>
010A <sub>16</sub> 010B <sub>16</sub>	Time measurement/waveform generating register 15	G1TM5/G1PO5	XX <sub>16</sub> XX <sub>16</sub>
010C <sub>16</sub> 010D <sub>16</sub>	Time measurement/waveform generating register 16	G1TM6/G1PO6	XX <sub>16</sub> XX <sub>16</sub>
010E <sub>16</sub> 010F <sub>16</sub>	Time measurement/waveform generating register 17	G1TM7/G1PO7	XX <sub>16</sub> XX <sub>16</sub>
0110 <sub>16</sub>	Waveform generating control register 10	G1POCR0	0000 X000 <sub>2</sub>
0111 <sub>16</sub>	Waveform generating control register 11	G1POCR1	0X00 X000 <sub>2</sub>
0112 <sub>16</sub>	Waveform generating control register 12	G1POCR2	0X00 X000 <sub>2</sub>
0113 <sub>16</sub>	Waveform generating control register 13	G1POCR3	0X00 X000 <sub>2</sub>
0114 <sub>16</sub>	Waveform generating control register 14	G1POCR4	0X00 X000 <sub>2</sub>
0115 <sub>16</sub>	Waveform generating control register 15	G1POCR5	0X00 X000 <sub>2</sub>
0116 <sub>16</sub>	Waveform generating control register 16	G1POCR6	0X00 X000 <sub>2</sub>
0117 <sub>16</sub>	Waveform generating control register 17	G1POCR7	0X00 X000 <sub>2</sub>
0118 <sub>16</sub>	Time measurement control register 10	G1TMCR0	00 <sub>16</sub>
0119 <sub>16</sub>	Time measurement control register 11	G1TMCR1	00 <sub>16</sub>
011A <sub>16</sub>	Time measurement control register 12	G1TMCR2	00 <sub>16</sub>
011B <sub>16</sub>	Time measurement control register 13	G1TMCR3	00 <sub>16</sub>
011C <sub>16</sub>	Time measurement control register 14	G1TMCR4	00 <sub>16</sub>
011D <sub>16</sub>	Time measurement control register 15	G1TMCR5	00 <sub>16</sub>
011E <sub>16</sub>	Time measurement control register 16	G1TMCR6	00 <sub>16</sub>
011F <sub>16</sub>	Time measurement control register 17	G1TMCR7	00 <sub>16</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0120 <sub>16</sub> 0121 <sub>16</sub>	Base timer register 1	G1BT	XX <sub>16</sub> XX <sub>16</sub>
0122 <sub>16</sub>	Base timer control register 10	G1BCR0	00 <sub>16</sub>
0123 <sub>16</sub>	Base timer control register 11	G1BCR1	00 <sub>16</sub>
0124 <sub>16</sub>	Time measurement prescaler register 16	G1TPR6	00 <sub>16</sub>
0125 <sub>16</sub>	Time measurement prescaler register 17	G1TPR7	00 <sub>16</sub>
0126 <sub>16</sub>	Function enable register 1	G1FE	00 <sub>16</sub>
0127 <sub>16</sub>	Function select register 1	G1FS	00 <sub>16</sub>
0128 <sub>16</sub> 0129 <sub>16</sub>	SI/O receive buffer register 1	G1RB	XXXX XXXX <sub>2</sub> XX00 XXXX <sub>2</sub>
012A <sub>16</sub> 012B <sub>16</sub>	Transmit buffer/receive data register 1	G1TB	XX <sub>16</sub>
012C <sub>16</sub>	Receive input register 1	G1RI	XX <sub>16</sub>
012D <sub>16</sub>	SI/O communication mode register 1	G1MR	00 <sub>16</sub>
012E <sub>16</sub>	Transmit output register 1	G1TO	XX <sub>16</sub>
012F <sub>16</sub>	SI/O communication control register 1	G1CR	0000 X011 <sub>2</sub>
0130 <sub>16</sub>	Data compare register 10	G1CMP0	XX <sub>16</sub>
0131 <sub>16</sub>	Data compare register 11	G1CMP1	XX <sub>16</sub>
0132 <sub>16</sub>	Data compare register 12	G1CMP2	XX <sub>16</sub>
0133 <sub>16</sub>	Data compare register 13	G1CMP3	XX <sub>16</sub>
0134 <sub>16</sub>	Data mask register 10	G1MSK0	XX <sub>16</sub>
0135 <sub>16</sub>	Data mask register 11	G1MSK1	XX <sub>16</sub>
0136 <sub>16</sub>			
0137 <sub>16</sub>			
0138 <sub>16</sub> 0139 <sub>16</sub>	Receive CRC code register 1	G1RCRC	XX <sub>16</sub> XX <sub>16</sub>
013A <sub>16</sub> 013B <sub>16</sub>	Transmit CRC code register 1	G1TCRC	00 <sub>16</sub> 00 <sub>16</sub>
013C <sub>16</sub>	SI/O extended mode register 1	G1EMR	00 <sub>16</sub>
013D <sub>16</sub>	SI/O extended receive control register 1	G1ERC	00 <sub>16</sub>
013E <sub>16</sub>	SI/O special communication interrupt detect register 1	G1IRF	0000 00XX <sub>2</sub>
013F <sub>16</sub>	SI/O extended transmit control register 1	G1ETC	0000 0XXX <sub>2</sub>
0140 <sub>16</sub>			
0141 <sub>16</sub>			
0142 <sub>16</sub>			
0143 <sub>16</sub>			
0144 <sub>16</sub>			
0145 <sub>16</sub>			
0146 <sub>16</sub>			
0147 <sub>16</sub>			
0148 <sub>16</sub>			
0149 <sub>16</sub>			
014A <sub>16</sub>			
014B <sub>16</sub>			
014C <sub>16</sub>			
014D <sub>16</sub>			
014E <sub>16</sub>			
014F <sub>16</sub>			

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0150 <sub>16</sub>			
0151 <sub>16</sub>			
0152 <sub>16</sub>			
0153 <sub>16</sub>			
0154 <sub>16</sub>			
0155 <sub>16</sub>			
0156 <sub>16</sub>			
0157 <sub>16</sub>			
0158 <sub>16</sub>			
0159 <sub>16</sub>			
015A <sub>16</sub>			
015B <sub>16</sub>			
015C <sub>16</sub>			
015D <sub>16</sub>			
015E <sub>16</sub>			
015F <sub>16</sub>			
0160 <sub>16</sub>			
0161 <sub>16</sub>			
0162 <sub>16</sub>			
0163 <sub>16</sub>			
0164 <sub>16</sub>			
0165 <sub>16</sub>			
0166 <sub>16</sub>			
0167 <sub>16</sub>			
0168 <sub>16</sub>			
0169 <sub>16</sub>			
016A <sub>16</sub>			
016B <sub>16</sub>			
016C <sub>16</sub>			
016D <sub>16</sub>			
016E <sub>16</sub>			
016F <sub>16</sub>			
0170 <sub>16</sub>			
0171 <sub>16</sub>			
0172 <sub>16</sub>			
0173 <sub>16</sub>			
0174 <sub>16</sub>			
0175 <sub>16</sub>			
0176 <sub>16</sub>			
0177 <sub>16</sub>			
0178 <sub>16</sub>	Input function select register	IPS	00 <sub>16</sub>
0179 <sub>16</sub>			
017A <sub>16</sub>			
017B <sub>16</sub>			
017C <sub>16</sub>			
017D <sub>16</sub> to 01DF <sub>16</sub>			

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
01E0 <sub>16</sub>	CAN0 message slot buffer 0 standard ID0	C0SLOT0_0	XX <sub>16</sub>
01E1 <sub>16</sub>	CAN0 message slot buffer 0 standard ID1	C0SLOT0_1	XX <sub>16</sub>
01E2 <sub>16</sub>	CAN0 message slot buffer 0 extended ID0	C0SLOT0_2	XX <sub>16</sub>
01E3 <sub>16</sub>	CAN0 message slot buffer 0 extended ID1	C0SLOT0_3	XX <sub>16</sub>
01E4 <sub>16</sub>	CAN0 message slot buffer 0 extended ID2	C0SLOT0_4	XX <sub>16</sub>
01E5 <sub>16</sub>	CAN0 message slot buffer 0 data length code	C0SLOT0_5	XX <sub>16</sub>
01E6 <sub>16</sub>	CAN0 message slot buffer 0 data 0	C0SLOT0_6	XX <sub>16</sub>
01E7 <sub>16</sub>	CAN0 message slot buffer 0 data 1	C0SLOT0_7	XX <sub>16</sub>
01E8 <sub>16</sub>	CAN0 message slot buffer 0 data 2	C0SLOT0_8	XX <sub>16</sub>
01E9 <sub>16</sub>	CAN0 message slot buffer 0 data 3	C0SLOT0_9	XX <sub>16</sub>
01EA <sub>16</sub>	CAN0 message slot buffer 0 data 4	C0SLOT0_10	XX <sub>16</sub>
01EB <sub>16</sub>	CAN0 message slot buffer 0 data 5	C0SLOT0_11	XX <sub>16</sub>
01EC <sub>16</sub>	CAN0 message slot buffer 0 data 6	C0SLOT0_12	XX <sub>16</sub>
01ED <sub>16</sub>	CAN0 message slot buffer 0 data 7	C0SLOT0_13	XX <sub>16</sub>
01EE <sub>16</sub>	CAN0 message slot buffer 0 time stamp high-order	C0SLOT0_14	XX <sub>16</sub>
01EF <sub>16</sub>	CAN0 message slot buffer 0 time stamp low-order	C0SLOT0_15	XX <sub>16</sub>
01F0 <sub>16</sub>	CAN0 message slot buffer 1 standard ID0	C0SLOT1_0	XX <sub>16</sub>
01F1 <sub>16</sub>	CAN0 message slot buffer 1 standard ID1	C0SLOT1_1	XX <sub>16</sub>
01F2 <sub>16</sub>	CAN0 message slot buffer 1 extended ID0	C0SLOT1_2	XX <sub>16</sub>
01F3 <sub>16</sub>	CAN0 message slot buffer 1 extended ID1	C0SLOT1_3	XX <sub>16</sub>
01F4 <sub>16</sub>	CAN0 message slot buffer 1 extended ID2	C0SLOT1_4	XX <sub>16</sub>
01F5 <sub>16</sub>	CAN0 message slot buffer 1 data length code	C0SLOT1_5	XX <sub>16</sub>
01F6 <sub>16</sub>	CAN0 message slot buffer 1 data 0	C0SLOT1_6	XX <sub>16</sub>
01F7 <sub>16</sub>	CAN0 message slot buffer 1 data 1	C0SLOT1_7	XX <sub>16</sub>
01F8 <sub>16</sub>	CAN0 message slot buffer 1 data 2	C0SLOT1_8	XX <sub>16</sub>
01F9 <sub>16</sub>	CAN0 message slot buffer 1 data 3	C0SLOT1_9	XX <sub>16</sub>
01FA <sub>16</sub>	CAN0 message slot buffer 1 data 4	C0SLOT1_10	XX <sub>16</sub>
01FB <sub>16</sub>	CAN0 message slot buffer 1 data 5	C0SLOT1_11	XX <sub>16</sub>
01FC <sub>16</sub>	CAN0 message slot buffer 1 data 6	C0SLOT1_12	XX <sub>16</sub>
01FD <sub>16</sub>	CAN0 message slot buffer 1 data 7	C0SLOT1_13	XX <sub>16</sub>
01FE <sub>16</sub>	CAN0 message slot buffer 1 time stamp high-order	C0SLOT1_14	XX <sub>16</sub>
01FF <sub>16</sub>	CAN0 message slot buffer 1 time stamp low-order	C0SLOT1_15	XX <sub>16</sub>
0200 <sub>16</sub>	CAN0 control register 0	C0CTLR0	XX01 0X01 <sub>2</sub> <sup>(1)</sup>
0201 <sub>16</sub>			XXXX 0000 <sub>2</sub> <sup>(1)</sup>
0202 <sub>16</sub>	CAN0 status register	C0STR	0000 0000 <sub>2</sub> <sup>(1)</sup>
0203 <sub>16</sub>			X000 0X01 <sub>2</sub> <sup>(1)</sup>
0204 <sub>16</sub>	CAN0 extended ID register	C0IDR	00 <sub>16</sub> <sup>(1)</sup>
0205 <sub>16</sub>			00 <sub>16</sub> <sup>(1)</sup>
0206 <sub>16</sub>	CAN0 configuration register	C0CONR	0000 XXXX <sub>2</sub> <sup>(1)</sup>
0207 <sub>16</sub>			0000 0000 <sub>2</sub> <sup>(1)</sup>
0208 <sub>16</sub>	CAN0 time stamp register	C0TSR	00 <sub>16</sub> <sup>(1)</sup>
0209 <sub>16</sub>			00 <sub>16</sub> <sup>(1)</sup>
020A <sub>16</sub>	CAN0 transmit error count register	C0TEC	00 <sub>16</sub> <sup>(1)</sup>
020B <sub>16</sub>	CAN0 receive error count register	C0REC	00 <sub>16</sub> <sup>(1)</sup>
020C <sub>16</sub>	CAN0 slot interrupt status register	C0SISTR	00 <sub>16</sub> <sup>(1)</sup>
020D <sub>16</sub>			00 <sub>16</sub> <sup>(1)</sup>
020E <sub>16</sub>			
020F <sub>16</sub>			

X: Indeterminate

Blank spaces are reserved. No access is allowed.

NOTES:

1. Values are obtained by setting the SLEEP bit in the C0SLPR register to "1" (sleep mode exited) and supplying a clock to the CAN module after reset.

Address	Register	Symbol	Value after RESET
0210 <sub>16</sub>	CAN0 slot interrupt mask register	C0SIMKR	00 <sub>16</sub> <sup>(2)</sup>
0211 <sub>16</sub>			00 <sub>16</sub> <sup>(2)</sup>
0212 <sub>16</sub>			
0213 <sub>16</sub>			
0214 <sub>16</sub>	CAN0 error interrupt mask register	C0EIMKR	XXXX X000 <sub>2</sub> <sup>(2)</sup>
0215 <sub>16</sub>	CAN0 error interrupt status register	C0EISTR	XXXX X000 <sub>2</sub> <sup>(2)</sup>
0216 <sub>16</sub>	CAN0 error cause register	C0EFR	00 <sub>16</sub> <sup>(2)</sup>
0217 <sub>16</sub>	CAN0 baud rate prescaler	C0BRP	0000 0001 <sub>2</sub> <sup>(2)</sup>
0218 <sub>16</sub>			
0219 <sub>16</sub>	CAN0 mode register	C0MDR	XXXX XX00 <sub>2</sub> <sup>(2)</sup>
021A <sub>16</sub>			
021B <sub>16</sub>			
021C <sub>16</sub>			
021D <sub>16</sub>			
021E <sub>16</sub>			
021F <sub>16</sub>			
0220 <sub>16</sub>	CAN0 single shot control register	C0SSCLR	00 <sub>16</sub> <sup>(2)</sup>
0221 <sub>16</sub>			00 <sub>16</sub> <sup>(2)</sup>
0222 <sub>16</sub>			
0223 <sub>16</sub>			
0224 <sub>16</sub>	CAN0 single shot status register	C0SSSTR	00 <sub>16</sub> <sup>(2)</sup>
0225 <sub>16</sub>			00 <sub>16</sub> <sup>(2)</sup>
0226 <sub>16</sub>			
0227 <sub>16</sub>			
0228 <sub>16</sub>	CAN0 global mask register standard ID0	C0GMR0	XXX0 0000 <sub>2</sub> <sup>(2)</sup>
0229 <sub>16</sub>	CAN0 global mask register standard ID1	C0GMR1	XX00 0000 <sub>2</sub> <sup>(2)</sup>
022A <sub>16</sub>	CAN0 global mask register extended ID0	C0GMR2	XXXX 0000 <sub>2</sub> <sup>(2)</sup>
022B <sub>16</sub>	CAN0 global mask register extended ID1	C0GMR3	00 <sub>16</sub> <sup>(2)</sup>
022C <sub>16</sub>	CAN0 global mask register extended ID2	C0GMR4	XX00 0000 <sub>2</sub> <sup>(2)</sup>
022D <sub>16</sub>			
022E <sub>16</sub>			
022F <sub>16</sub>			
0230 <sub>16</sub>	CAN0 message slot 0 control register /	C0MCTL0/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register A standard ID0	C0LMAR0	XXX0 0000 <sub>2</sub> <sup>(2)</sup>
0231 <sub>16</sub>	CAN0 message slot 1 control register /	C0MCTL1/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register A standard ID1	C0LMAR1	XX00 0000 <sub>2</sub> <sup>(2)</sup>
0232 <sub>16</sub>	CAN0 message slot 2 control register /	C0MCTL2/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register A extended ID0	C0LMAR2	XXXX 0000 <sub>2</sub> <sup>(2)</sup>
0233 <sub>16</sub>	CAN0 message slot 3 control register /	C0MCTL3/	00 <sub>16</sub> <sup>(2)</sup>
	CAN0 local mask register A extended ID1	C0LMAR3	00 <sub>16</sub> <sup>(2)</sup>
0234 <sub>16</sub>	CAN0 message slot 4 control register /	C0MCTL4/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register A extended ID2	C0LMAR4	XX00 0000 <sub>2</sub> <sup>(2)</sup>
0235 <sub>16</sub>	CAN0 message slot 5 control register	C0MCTL5	00 <sub>16</sub> <sup>(2)</sup>
0236 <sub>16</sub>	CAN0 message slot 6 control register	C0MCTL6	00 <sub>16</sub> <sup>(2)</sup>
0237 <sub>16</sub>	CAN0 message slot 7 control register	C0MCTL7	00 <sub>16</sub> <sup>(2)</sup>
0238 <sub>16</sub>	CAN0 message slot 8 control register /	C0MCTL8/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register B standard ID0	C0LMBR0	XXX0 0000 <sub>2</sub> <sup>(2)</sup>

(Note 1)

X: Indeterminate

Blank spaces are reserved. No access is allowed.

NOTES:

1. The BANKSEL bit in the C0CTLR1 register switches functions for addresses 0220<sub>16</sub> to 023F<sub>16</sub>.
2. Values are obtained by setting the SLEEP bit in the C0SLPR register to "1" (sleep mode exited) and supplying a clock to the CAN module after reset.

Address	Register	Symbol	Value after RESET
0239 <sub>16</sub>	CAN0 message slot 9 control register /	C0MCTL9/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register B standard ID1	C0LMBR1	XX00 0000 <sub>2</sub> <sup>(2)</sup>
023A <sub>16</sub>	CAN0 message slot 10 control register /	C0MCTL10/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register B extended ID0	C0LMBR2	XXXX 0000 <sub>2</sub> <sup>(2)</sup>
023B <sub>16</sub>	CAN0 message slot 11 control register /	C0MCTL11/	00 <sub>16</sub> <sup>(2)</sup>
	CAN0 local mask register B extended ID1	C0LMBR3	00 <sub>16</sub> <sup>(2)</sup>
023C <sub>16</sub>	CAN0 message slot 12 control register /	C0MCTL12/	0000 0000 <sub>2</sub> <sup>(2)</sup>
	CAN0 local mask register B extended ID2	C0LMBR4	XX00 0000 <sub>2</sub> <sup>(2)</sup>
023D <sub>16</sub>	CAN0 message slot 13 control register	C0MCTL13	00 <sub>16</sub> <sup>(2)</sup>
023E <sub>16</sub>	CAN0 message slot 14 control register	C0MCTL14	00 <sub>16</sub> <sup>(2)</sup>
023F <sub>16</sub>	CAN0 message slot 15 control register	C0MCTL15	00 <sub>16</sub> <sup>(2)</sup>
0240 <sub>16</sub>	CAN0 slot buffer select register	C0SBS	00 <sub>16</sub> <sup>(2)</sup>
0241 <sub>16</sub>	CAN0 control register 1	C0CTLR1	X000 00XX <sub>2</sub> <sup>(2)</sup>
0242 <sub>16</sub>	CAN0 sleep control register	C0SLPR	XXXX XXX0 <sub>2</sub>
0243 <sub>16</sub>			
0244 <sub>16</sub>	CAN0 acceptance filter support register	C0AFS	00 <sub>16</sub> <sup>(2)</sup>
0245 <sub>16</sub>			01 <sub>16</sub> <sup>(2)</sup>
0246 <sub>16</sub>			
0247 <sub>16</sub>			
0248 <sub>16</sub>			
0249 <sub>16</sub>			
024A <sub>16</sub>			
024B <sub>16</sub>			
024C <sub>16</sub>			
024D <sub>16</sub>			
024E <sub>16</sub>			
024F <sub>16</sub>			
0250 <sub>16</sub>			
0251 <sub>16</sub>			
0252 <sub>16</sub>			
0253 <sub>16</sub>			
0254 <sub>16</sub>			
0255 <sub>16</sub>			
0256 <sub>16</sub>			
0257 <sub>16</sub>			
0258 <sub>16</sub>			
0259 <sub>16</sub>			
025A <sub>16</sub>			
025B <sub>16</sub>			
025C <sub>16</sub>			
025D <sub>16</sub>			
025E <sub>16</sub>			
025F <sub>16</sub>			
0260 <sub>16</sub>			
0261 <sub>16</sub> to 02BF <sub>16</sub>			

(Note 1)

X: Indeterminate

Blank spaces are reserved. No access is allowed.

NOTES:

1. The BANKSEL bit in the C0CTLR1 register switches functions for addresses 0220<sub>16</sub> to 023F<sub>16</sub>.
2. Values are obtained by setting the SLEEP bit in the C0SLPR register to "1" (sleep mode exited) and supplying a clock to the CAN module after reset.

Address	Register	Symbol	Value after RESET
02C0 <sub>16</sub> 02C1 <sub>16</sub>	X0 register Y0 register	X0R,Y0R	XX <sub>16</sub> XX <sub>16</sub>
02C2 <sub>16</sub> 02C3 <sub>16</sub>	X1 register Y1 register	X1R,Y1R	XX <sub>16</sub> XX <sub>16</sub>
02C4 <sub>16</sub> 02C5 <sub>16</sub>	X2 register Y2 register	X2R,Y2R	XX <sub>16</sub> XX <sub>16</sub>
02C6 <sub>16</sub> 02C7 <sub>16</sub>	X3 register Y3 register	X3R,Y3R	XX <sub>16</sub> XX <sub>16</sub>
02C8 <sub>16</sub> 02C9 <sub>16</sub>	X4 register Y4 register	X4R,Y4R	XX <sub>16</sub> XX <sub>16</sub>
02CA <sub>16</sub> 02CB <sub>16</sub>	X5 register Y5 register	X5R,Y5R	XX <sub>16</sub> XX <sub>16</sub>
02CC <sub>16</sub> 02CD <sub>16</sub>	X6 register Y6 register	X6R,Y6R	XX <sub>16</sub> XX <sub>16</sub>
02CE <sub>16</sub> 02CF <sub>16</sub>	X7 register Y7 register	X7R,Y7R	XX <sub>16</sub> XX <sub>16</sub>
02D0 <sub>16</sub> 02D1 <sub>16</sub>	X8 register Y8 register	X8R,Y8R	XX <sub>16</sub> XX <sub>16</sub>
02D2 <sub>16</sub> 02D3 <sub>16</sub>	X9 register Y9 register	X9R,Y9R	XX <sub>16</sub> XX <sub>16</sub>
02D4 <sub>16</sub> 02D5 <sub>16</sub>	X10 register Y10 register	X10R,Y10R	XX <sub>16</sub> XX <sub>16</sub>
02D6 <sub>16</sub> 02D7 <sub>16</sub>	X11 register Y11 register	X11R,Y11R	XX <sub>16</sub> XX <sub>16</sub>
02D8 <sub>16</sub> 02D9 <sub>16</sub>	X12 register Y12 register	X12R,Y12R	XX <sub>16</sub> XX <sub>16</sub>
02DA <sub>16</sub> 02DB <sub>16</sub>	X13 register Y13 register	X13R,Y13R	XX <sub>16</sub> XX <sub>16</sub>
02DC <sub>16</sub> 02DD <sub>16</sub>	X14 register Y14 register	X14R,Y14R	XX <sub>16</sub> XX <sub>16</sub>
02DE <sub>16</sub> 02DF <sub>16</sub>	X15 register Y15 register	X15R,Y15R	XX <sub>16</sub> XX <sub>16</sub>
02E0 <sub>16</sub>	XY control register	XYC	XXXX XX00 <sub>2</sub>
02E1 <sub>16</sub>			
02E2 <sub>16</sub>			
02E3 <sub>16</sub>			
02E4 <sub>16</sub>	UART1 special mode register 4	U1SMR4	00 <sub>16</sub>
02E5 <sub>16</sub>	UART1 special mode register 3	U1SMR3	00 <sub>16</sub>
02E6 <sub>16</sub>	UART1 special mode register 2	U1SMR2	00 <sub>16</sub>
02E7 <sub>16</sub>	UART1 special mode register	U1SMR	00 <sub>16</sub>
02E8 <sub>16</sub>	UART1 transmit/receive mode register	U1MR	00 <sub>16</sub>
02E9 <sub>16</sub>	UART1 baud rate register	U1BRG	XX <sub>16</sub>
02EA <sub>16</sub> 02EB <sub>16</sub>	UART1 transmit buffer register	U1TB	XX <sub>16</sub> XX <sub>16</sub>
02EC <sub>16</sub>	UART1 transmit/receive control register 0	U1C0	0000 1000 <sub>2</sub>
02ED <sub>16</sub>	UART1 transmit/receive control register 1	U1C1	0000 0010 <sub>2</sub>
02EE <sub>16</sub> 02EF <sub>16</sub>	UART1 receive buffer register	U1RB	XX <sub>16</sub> XX <sub>16</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
02F0 <sub>16</sub>			
02F1 <sub>16</sub>			
02F2 <sub>16</sub>			
02F3 <sub>16</sub>			
02F4 <sub>16</sub>	UART4 special mode register 4	U4SMR4	00 <sub>16</sub>
02F5 <sub>16</sub>	UART4 special mode register 3	U4SMR3	00 <sub>16</sub>
02F6 <sub>16</sub>	UART4 special mode register 2	U4SMR2	00 <sub>16</sub>
02F7 <sub>16</sub>	UART4 special mode register	U4SMR	00 <sub>16</sub>
02F8 <sub>16</sub>	UART4 transmit/receive mode register	U4MR	00 <sub>16</sub>
02F9 <sub>16</sub>	UART4 baud rate register	U4BRG	XX <sub>16</sub>
02FA <sub>16</sub>	UART4 transmit buffer register	U4TB	XX <sub>16</sub>
02FB <sub>16</sub>			XX <sub>16</sub>
02FC <sub>16</sub>	UART4 transmit/receive control register 0	U4C0	0000 1000 <sub>2</sub>
02FD <sub>16</sub>	UART4 transmit/receive control register 1	U4C1	0000 0010 <sub>2</sub>
02FE <sub>16</sub>	UART4 receive buffer register	U4RB	XX <sub>16</sub>
02FF <sub>16</sub>			XX <sub>16</sub>
0300 <sub>16</sub>	Timer B3,B4,B5 count start flag	TBSR	000X XXXX <sub>2</sub>
0301 <sub>16</sub>			
0302 <sub>16</sub>	Timer A1-1 register	TA11	XX <sub>16</sub>
0303 <sub>16</sub>			XX <sub>16</sub>
0304 <sub>16</sub>	Timer A2-1 register	TA21	XX <sub>16</sub>
0305 <sub>16</sub>			XX <sub>16</sub>
0306 <sub>16</sub>	Timer A4-1 register	TA41	XX <sub>16</sub>
0307 <sub>16</sub>			XX <sub>16</sub>
0308 <sub>16</sub>	Three-phase PWM control register 0	INVC0	00 <sub>16</sub>
0309 <sub>16</sub>	Three-phase PWM control register 1	INVC1	00 <sub>16</sub>
030A <sub>16</sub>	Three-phase output buffer register 0	IDB0	XX11 1111 <sub>2</sub>
030B <sub>16</sub>	Three-phase output buffer register 1	IDB1	XX11 1111 <sub>2</sub>
030C <sub>16</sub>	Dead time timer	DTT	XX <sub>16</sub>
030D <sub>16</sub>	Timer B2 interrupt generating frequency set counter	ICTB2	XX <sub>16</sub>
030E <sub>16</sub>			
030F <sub>16</sub>			
0310 <sub>16</sub>	Timer B3 register	TB3	XX <sub>16</sub>
0311 <sub>16</sub>			XX <sub>16</sub>
0312 <sub>16</sub>	Timer B4 register	TB4	XX <sub>16</sub>
0313 <sub>16</sub>			XX <sub>16</sub>
0314 <sub>16</sub>	Timer B5 register	TB5	XX <sub>16</sub>
0315 <sub>16</sub>			XX <sub>16</sub>
0316 <sub>16</sub>			
0317 <sub>16</sub>			
0318 <sub>16</sub>			
0319 <sub>16</sub>			
031A <sub>16</sub>			
031B <sub>16</sub>	Timer B3 mode register	TB3MR	00XX 0000 <sub>2</sub>
031C <sub>16</sub>	Timer B4 mode register	TB4MR	00XX 0000 <sub>2</sub>
031D <sub>16</sub>	Timer B5 mode register	TB5MR	00XX 0000 <sub>2</sub>
031E <sub>16</sub>			
031F <sub>16</sub>	External interrupt cause select register	IFSR	00 <sub>16</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0320 <sub>16</sub>			
0321 <sub>16</sub>			
0322 <sub>16</sub>			
0323 <sub>16</sub>			
0324 <sub>16</sub>	UART3 special mode register 4	U3SMR4	00 <sub>16</sub>
0325 <sub>16</sub>	UART3 special mode register 3	U3SMR3	00 <sub>16</sub>
0326 <sub>16</sub>	UART3 special mode register 2	U3SMR2	00 <sub>16</sub>
0327 <sub>16</sub>	UART3 special mode register	U3SMR	00 <sub>16</sub>
0328 <sub>16</sub>	UART3 transmit/receive mode register	U3MR	00 <sub>16</sub>
0329 <sub>16</sub>	UART3 baud rate register	U3BRG	XX <sub>16</sub>
032A <sub>16</sub>	UART3 transmit buffer register	U3TB	XX <sub>16</sub>
032B <sub>16</sub>			XX <sub>16</sub>
032C <sub>16</sub>	UART3 transmit/receive control register 0	U3C0	0000 1000 <sub>2</sub>
032D <sub>16</sub>	UART3 transmit/receive control register 1	U3C1	0000 0010 <sub>2</sub>
032E <sub>16</sub>	UART3 receive buffer register	U3RB	XX <sub>16</sub>
032F <sub>16</sub>			XX <sub>16</sub>
0330 <sub>16</sub>			
0331 <sub>16</sub>			
0332 <sub>16</sub>			
0333 <sub>16</sub>			
0334 <sub>16</sub>	UART2 special mode register 4	U2SMR4	00 <sub>16</sub>
0335 <sub>16</sub>	UART2 special mode register 3	U2SMR3	00 <sub>16</sub>
0336 <sub>16</sub>	UART2 special mode register 2	U2SMR2	00 <sub>16</sub>
0337 <sub>16</sub>	UART2 special mode register	U2SMR	00 <sub>16</sub>
0338 <sub>16</sub>	UART2 transmit/receive mode register	U2MR	00 <sub>16</sub>
0339 <sub>16</sub>	UART2 baud rate register	U2BRG	XX <sub>16</sub>
033A <sub>16</sub>	UART2 transmit buffer register	U2TB	XX <sub>16</sub>
033B <sub>16</sub>			XX <sub>16</sub>
033C <sub>16</sub>	UART2 transmit/receive control register 0	U2C0	0000 1000 <sub>2</sub>
033D <sub>16</sub>	UART2 transmit/receive control register 1	U2C1	0000 0010 <sub>2</sub>
033E <sub>16</sub>	UART2 receive buffer register	U2RB	XX <sub>16</sub>
033F <sub>16</sub>			XX <sub>16</sub>
0340 <sub>16</sub>	Count start flag	TABSR	00 <sub>16</sub>
0341 <sub>16</sub>	Clock prescaler reset flag	CPSRF	0XXX XXXX <sub>2</sub>
0342 <sub>16</sub>	One-shot start flag	ONSF	00 <sub>16</sub>
0343 <sub>16</sub>	Trigger select register	TRGSR	00 <sub>16</sub>
0344 <sub>16</sub>	Up-down flag	UDF	00 <sub>16</sub>
0345 <sub>16</sub>			
0346 <sub>16</sub>	Timer A0 register	TA0	XX <sub>16</sub>
0347 <sub>16</sub>			XX <sub>16</sub>
0348 <sub>16</sub>	Timer A1 register	TA1	XX <sub>16</sub>
0349 <sub>16</sub>			XX <sub>16</sub>
034A <sub>16</sub>	Timer A2 register	TA2	XX <sub>16</sub>
034B <sub>16</sub>			XX <sub>16</sub>
034C <sub>16</sub>	Timer A3 register	TA3	XX <sub>16</sub>
034D <sub>16</sub>			XX <sub>16</sub>
034E <sub>16</sub>	Timer A4 register	TA4	XX <sub>16</sub>
034F <sub>16</sub>			XX <sub>16</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0350 <sub>16</sub> 0351 <sub>16</sub>	Timer B0 register	TB0	XX <sub>16</sub> XX <sub>16</sub>
0352 <sub>16</sub> 0353 <sub>16</sub>	Timer B1 register	TB1	XX <sub>16</sub> XX <sub>16</sub>
0354 <sub>16</sub> 0355 <sub>16</sub>	Timer B2 register	TB2	XX <sub>16</sub> XX <sub>16</sub>
0356 <sub>16</sub>	Timer A0 mode register	TA0MR	0000 0X00 <sub>2</sub>
0357 <sub>16</sub>	Timer A1 mode register	TA1MR	0000 0X00 <sub>2</sub>
0358 <sub>16</sub>	Timer A2 mode register	TA2MR	0000 0X00 <sub>2</sub>
0359 <sub>16</sub>	Timer A3 mode register	TA3MR	0000 0X00 <sub>2</sub>
035A <sub>16</sub>	Timer A4 mode register	TA4MR	0000 0X00 <sub>2</sub>
035B <sub>16</sub>	Timer B0 mode register	TB0MR	00XX 0000 <sub>2</sub>
035C <sub>16</sub>	Timer B1 mode register	TB1MR	00XX 0000 <sub>2</sub>
035D <sub>16</sub>	Timer B2 mode register	TB2MR	00XX 0000 <sub>2</sub>
035E <sub>16</sub>	Timer B2 special mode register	TB2SC	XXXX XXX0 <sub>2</sub>
035F <sub>16</sub>	Count source prescaler register	TCSPR	0XXX 0000 <sub>2</sub>
0360 <sub>16</sub>			
0361 <sub>16</sub>			
0362 <sub>16</sub>			
0363 <sub>16</sub>			
0364 <sub>16</sub>	UART0 special mode register 4	U0SMR4	00 <sub>16</sub>
0365 <sub>16</sub>	UART0 special mode register 3	U0SMR3	00 <sub>16</sub>
0366 <sub>16</sub>	UART0 special mode register 2	U0SMR2	00 <sub>16</sub>
0367 <sub>16</sub>	UART0 special mode register	U0SMR	00 <sub>16</sub>
0368 <sub>16</sub>	UART0 transmit/receive mode register	U0MR	00 <sub>16</sub>
0369 <sub>16</sub>	UART0 baud rate register	U0BRG	XX <sub>16</sub>
036A <sub>16</sub> 036B <sub>16</sub>	UART0 transmit buffer register	U0TB	XX <sub>16</sub> XX <sub>16</sub>
036C <sub>16</sub>	UART0 transmit/receive control register 0	U0C0	0000 1000 <sub>2</sub>
036D <sub>16</sub>	UART0 transmit/receive control register 1	U0C1	0000 0010 <sub>2</sub>
036E <sub>16</sub> 036F <sub>16</sub>	UART0 receive buffer register	U0RB	XX <sub>16</sub> XX <sub>16</sub>
0370 <sub>16</sub>			
0371 <sub>16</sub>			
0372 <sub>16</sub>			
0373 <sub>16</sub>			
0374 <sub>16</sub>			
0375 <sub>16</sub>			
0376 <sub>16</sub>			
0377 <sub>16</sub>			
0378 <sub>16</sub>	DMA0 cause select register	DM0SL	0X00 0000 <sub>2</sub>
0379 <sub>16</sub>	DMA1 cause select register	DM1SL	0X00 0000 <sub>2</sub>
037A <sub>16</sub>	DMA2 cause select register	DM2SL	0X00 0000 <sub>2</sub>
037B <sub>16</sub>	DMA3 cause select register	DM3SL	0X00 0000 <sub>2</sub>
037C <sub>16</sub> 037D <sub>16</sub>	CRC data register	CRCD	XX <sub>16</sub> XX <sub>16</sub>
037E <sub>16</sub>	CRC input register	CRCIN	XX <sub>16</sub>
037F <sub>16</sub>			

X: Indeterminate

Blank spaces are reserved. No access is allowed.

Address	Register	Symbol	Value after RESET
0380 <sub>16</sub> 0381 <sub>16</sub>	A-D0 register 0	AD00	XXXX XXXX <sub>2</sub> 0000 0000 <sub>2</sub>
0382 <sub>16</sub> 0383 <sub>16</sub>	A-D0 register 1	AD01	XX <sub>16</sub> XX <sub>16</sub>
0384 <sub>16</sub> 0385 <sub>16</sub>	A-D0 register 2	AD02	XX <sub>16</sub> XX <sub>16</sub>
0386 <sub>16</sub> 0387 <sub>16</sub>	A-D0 register 3	AD03	XX <sub>16</sub> XX <sub>16</sub>
0388 <sub>16</sub> 0389 <sub>16</sub>	A-D0 register 4	AD04	XX <sub>16</sub> XX <sub>16</sub>
038A <sub>16</sub> 038B <sub>16</sub>	A-D0 register 5	AD05	XX <sub>16</sub> XX <sub>16</sub>
038C <sub>16</sub> 038D <sub>16</sub>	A-D0 register 6	AD06	XX <sub>16</sub> XX <sub>16</sub>
038E <sub>16</sub> 038F <sub>16</sub>	A-D0 register 7	AD07	XX <sub>16</sub> XX <sub>16</sub>
0390 <sub>16</sub>			
0391 <sub>16</sub>			
0392 <sub>16</sub> 0393 <sub>16</sub>	A-D0 control register 4	AD0CON4	XXXX 00XX <sub>2</sub>
0394 <sub>16</sub>	A-D0 control register 2	AD0CON2	XX0X X000 <sub>2</sub>
0395 <sub>16</sub>	A-D0 control register 3	AD0CON3	XXXX X000 <sub>2</sub>
0396 <sub>16</sub>	A-D0 control register 0	AD0CON0	00 <sub>16</sub>
0397 <sub>16</sub>	A-D0 control register 1	AD0CON1	00 <sub>16</sub>
0398 <sub>16</sub> 0399 <sub>16</sub>	D-A register 0	DA0	XX <sub>16</sub>
039A <sub>16</sub> 039B <sub>16</sub>	D-A register 1	DA1	XX <sub>16</sub>
039C <sub>16</sub> 039D <sub>16</sub>	D-A control register	DACON	XXXX XX00 <sub>2</sub>
039E <sub>16</sub>			
039F <sub>16</sub>			

X: Indeterminate

Blank spaces are reserved. No access is allowed.

<144-pin package>

Address	Register	Symbol	Value after RESET
03A0 <sub>16</sub>	Function select register A8	PS8	X000 0000 <sub>2</sub>
03A1 <sub>16</sub>	Function select register A9	PS9	00 <sub>16</sub>
03A2 <sub>16</sub>			
03A3 <sub>16</sub>			
03A4 <sub>16</sub>			
03A5 <sub>16</sub>			
03A6 <sub>16</sub>			
03A7 <sub>16</sub>	Function select register D1	PSD1	X0XX XX00 <sub>2</sub>
03A8 <sub>16</sub>			
03A9 <sub>16</sub>			
03AA <sub>16</sub>			
03AB <sub>16</sub>			
03AC <sub>16</sub>	Function select register C2	PSC2	XXXX X00X <sub>2</sub>
03AD <sub>16</sub>	Function select register C3	PSC3	X0XX XXXX <sub>2</sub>
03AE <sub>16</sub>			
03AF <sub>16</sub>	Function select register C	PSC	00X0 0000 <sub>2</sub>
03B0 <sub>16</sub>	Function select register A0	PS0	00 <sub>16</sub>
03B1 <sub>16</sub>	Function select register A1	PS1	00 <sub>16</sub>
03B2 <sub>16</sub>	Function select register B0	PSL0	00 <sub>16</sub>
03B3 <sub>16</sub>	Function select register B1	PSL1	00 <sub>16</sub>
03B4 <sub>16</sub>	Function select register A2	PS2	00X0 0000 <sub>2</sub>
03B5 <sub>16</sub>	Function select register A3	PS3	00 <sub>16</sub>
03B6 <sub>16</sub>	Function select register B2	PSL2	00X0 0000 <sub>2</sub>
03B7 <sub>16</sub>	Function select register B3	PSL3	00 <sub>16</sub>
03B8 <sub>16</sub>			
03B9 <sub>16</sub>	Function select register A5	PS5	XXX0 0000 <sub>2</sub>
03BA <sub>16</sub>			
03BB <sub>16</sub>			
03BC <sub>16</sub>			
03BD <sub>16</sub>			
03BE <sub>16</sub>			
03BF <sub>16</sub>			
03C0 <sub>16</sub>	Port P6 register	P6	XX <sub>16</sub>
03C1 <sub>16</sub>	Port P7 register	P7	XX <sub>16</sub>
03C2 <sub>16</sub>	Port P6 direction register	PD6	00 <sub>16</sub>
03C3 <sub>16</sub>	Port P7 direction register	PD7	00 <sub>16</sub>
03C4 <sub>16</sub>	Port P8 register	P8	XX <sub>16</sub>
03C5 <sub>16</sub>	Port P9 register	P9	XX <sub>16</sub>
03C6 <sub>16</sub>	Port P8 direction register	PD8	00X0 0000 <sub>2</sub>
03C7 <sub>16</sub>	Port P9 direction register	PD9	00 <sub>16</sub>
03C8 <sub>16</sub>	Port P10 register	P10	XX <sub>16</sub>
03C9 <sub>16</sub>	Port P11 register	P11	XX <sub>16</sub>
03CA <sub>16</sub>	Port P10 direction register	PD10	00 <sub>16</sub>
03CB <sub>16</sub>	Port P11 direction register	PD11	XXX0 0000 <sub>2</sub>
03CC <sub>16</sub>	Port P12 register	P12	XX <sub>16</sub>
03CD <sub>16</sub>	Port P13 register	P13	XX <sub>16</sub>
03CE <sub>16</sub>	Port P12 direction register	PD12	00 <sub>16</sub>
03CF <sub>16</sub>	Port P13 direction register	PD13	00 <sub>16</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

<144-pin package>

Address	Register	Symbol	Value after RESET
03D0 <sub>16</sub>	Port P14 register	P14	XX <sub>16</sub>
03D1 <sub>16</sub>	Port P15 register	P15	XX <sub>16</sub>
03D2 <sub>16</sub>	Port P14 direction register	PD14	X000 0000 <sub>2</sub>
03D3 <sub>16</sub>	Port P15 direction register	PD15	00 <sub>16</sub>
03D4 <sub>16</sub>			
03D5 <sub>16</sub>			
03D6 <sub>16</sub>			
03D7 <sub>16</sub>			
03D8 <sub>16</sub>			
03D9 <sub>16</sub>			
03DA <sub>16</sub>	Pull-up control register 2	PUR2	00 <sub>16</sub>
03DB <sub>16</sub>	Pull-up control register 3	PUR3	00 <sub>16</sub>
03DC <sub>16</sub>	Pull-up control register 4	PUR4	XXXX 0000 <sub>2</sub>
03DD <sub>16</sub>			
03DE <sub>16</sub>			
03DF <sub>16</sub>			
03E0 <sub>16</sub>	Port P0 register	P0	XX <sub>16</sub>
03E1 <sub>16</sub>	Port P1 register	P1	XX <sub>16</sub>
03E2 <sub>16</sub>	Port P0 direction register	PD0	00 <sub>16</sub>
03E3 <sub>16</sub>	Port P1 direction register	PD1	00 <sub>16</sub>
03E4 <sub>16</sub>	Port P2 register	P2	XX <sub>16</sub>
03E5 <sub>16</sub>	Port P3 register	P3	XX <sub>16</sub>
03E6 <sub>16</sub>	Port P2 direction register	PD2	00 <sub>16</sub>
03E7 <sub>16</sub>	Port P3 direction register	PD3	00 <sub>16</sub>
03E8 <sub>16</sub>	Port P4 register	P4	XX <sub>16</sub>
03E9 <sub>16</sub>	Port P5 register	P5	XX <sub>16</sub>
03EA <sub>16</sub>	Port P4 direction register	PD4	00 <sub>16</sub>
03EB <sub>16</sub>	Port P5 direction register	PD5	00 <sub>16</sub>
03EC <sub>16</sub>			
03ED <sub>16</sub>			
03EE <sub>16</sub>			
03EF <sub>16</sub>			
03F0 <sub>16</sub>	Pull-up control register 0	PUR0	00 <sub>16</sub>
03F1 <sub>16</sub>	Pull-up control register 1	PUR1	XXXX 0000 <sub>2</sub>
03F2 <sub>16</sub>			
03F3 <sub>16</sub>			
03F4 <sub>16</sub>			
03F5 <sub>16</sub>			
03F6 <sub>16</sub>			
03F7 <sub>16</sub>			
03F8 <sub>16</sub>			
03F9 <sub>16</sub>			
03FA <sub>16</sub>			
03FB <sub>16</sub>			
03FC <sub>16</sub>			
03FD <sub>16</sub>			
03FE <sub>16</sub>			
03FF <sub>16</sub>	Port control register	PCR	XXXX XXX0 <sub>2</sub>

X: Indeterminate

Blank spaces are reserved. No access is allowed.

<100-pin package>

Address	Register	Symbol	Value after RESET
03A0 <sub>16</sub>			
03A1 <sub>16</sub>			
03A2 <sub>16</sub>			
03A3 <sub>16</sub>			
03A4 <sub>16</sub>			
03A5 <sub>16</sub>			
03A6 <sub>16</sub>			
03A7 <sub>16</sub>	Function select register D1	PSD1	X0XX XX00 <sub>2</sub>
03A8 <sub>16</sub>			
03A9 <sub>16</sub>			
03AA <sub>16</sub>			
03AB <sub>16</sub>			
03AC <sub>16</sub>	Function select register C2	PSC2	XXXX X00X <sub>2</sub>
03AD <sub>16</sub>	Function select register C3	PSC3	X0XX XXXX <sub>2</sub>
03AE <sub>16</sub>			
03AF <sub>16</sub>	Function select register C	PSC	0X00 0000 <sub>2</sub>
03B0 <sub>16</sub>	Function select register A0	PS0	00 <sub>16</sub>
03B1 <sub>16</sub>	Function select register A1	PS1	00 <sub>16</sub>
03B2 <sub>16</sub>	Function select register B0	PSL0	00 <sub>16</sub>
03B3 <sub>16</sub>	Function select register B1	PSL1	00 <sub>16</sub>
03B4 <sub>16</sub>	Function select register A2	PS2	00X0 0000 <sub>2</sub>
03B5 <sub>16</sub>	Function select register A3	PS3	00 <sub>16</sub>
03B6 <sub>16</sub>	Function select register B2	PSL2	00X0 0000 <sub>2</sub>
03B7 <sub>16</sub>	Function select register B3	PSL3	00 <sub>16</sub>
03B8 <sub>16</sub>			
03B9 <sub>16</sub>			
03BA <sub>16</sub>			
03BB <sub>16</sub>			
03BC <sub>16</sub>			
03BD <sub>16</sub>			
03BE <sub>16</sub>			
03BF <sub>16</sub>			
03C0 <sub>16</sub>	Port P6 register	P6	XX <sub>16</sub>
03C1 <sub>16</sub>	Port P7 register	P7	XX <sub>16</sub>
03C2 <sub>16</sub>	Port P6 direction register	PD6	00 <sub>16</sub>
03C3 <sub>16</sub>	Port P7 direction register	PD7	00 <sub>16</sub>
03C4 <sub>16</sub>	Port P8 register	P8	XX <sub>16</sub>
03C5 <sub>16</sub>	Port P9 register	P9	XX <sub>16</sub>
03C6 <sub>16</sub>	Port P8 direction register	PD8	00X0 0000 <sub>2</sub>
03C7 <sub>16</sub>	Port P9 direction register	PD9	00 <sub>16</sub>
03C8 <sub>16</sub>	Port P10 register	P10	XX <sub>16</sub>
03C9 <sub>16</sub>			
03CA <sub>16</sub>	Port P10 direction register	PD10	00 <sub>16</sub>
03CB <sub>16</sub>	Set default value to "FF <sub>16</sub> "		
03CC <sub>16</sub>			
03CD <sub>16</sub>			
03CE <sub>16</sub>	Set default value to "FF <sub>16</sub> "		
03CF <sub>16</sub>	Set default value to "FF <sub>16</sub> "		

X: Indeterminate

Blank spaces are reserved. No access is allowed.

<100-pin package>

Address	Register	Symbol	Value after RESET
03D0 <sub>16</sub>			
03D1 <sub>16</sub>			
03D2 <sub>16</sub>	Set default value to "FF <sub>16</sub> "		
03D3 <sub>16</sub>	Set default value to "FF <sub>16</sub> "		
03D4 <sub>16</sub>			
03D5 <sub>16</sub>			
03D6 <sub>16</sub>			
03D7 <sub>16</sub>			
03D8 <sub>16</sub>			
03D9 <sub>16</sub>			
03DA <sub>16</sub>	Pull-up control register 2	PUR2	00 <sub>16</sub>
03DB <sub>16</sub>	Pull-up control register 3	PUR3	00 <sub>16</sub>
03DC <sub>16</sub>	Set default value to "00 <sub>16</sub> "		
03DD <sub>16</sub>			
03DE <sub>16</sub>			
03DF <sub>16</sub>			
03E0 <sub>16</sub>	Port P0 register	P0	XX <sub>16</sub>
03E1 <sub>16</sub>	Port P1 register	P1	XX <sub>16</sub>
03E2 <sub>16</sub>	Port P0 direction register	PD0	00 <sub>16</sub>
03E3 <sub>16</sub>	Port P1 direction register	PD1	00 <sub>16</sub>
03E4 <sub>16</sub>	Port P2 register	P2	XX <sub>16</sub>
03E5 <sub>16</sub>	Port P3 register	P3	XX <sub>16</sub>
03E6 <sub>16</sub>	Port P2 direction register	PD2	00 <sub>16</sub>
03E7 <sub>16</sub>	Port P3 direction register	PD3	00 <sub>16</sub>
03E8 <sub>16</sub>	Port P4 register	P4	XX <sub>16</sub>
03E9 <sub>16</sub>	Port P5 register	P5	XX <sub>16</sub>
03EA <sub>16</sub>	Port P4 direction register	PD4	00 <sub>16</sub>
03EB <sub>16</sub>	Port P5 direction register	PD5	00 <sub>16</sub>
03EC <sub>16</sub>			
03ED <sub>16</sub>			
03EE <sub>16</sub>			
03EF <sub>16</sub>			
03F0 <sub>16</sub>	Pull-up control register 0	PUR0	00 <sub>16</sub>
03F1 <sub>16</sub>	Pull-up control register 1	PUR1	XXXX 0000 <sub>2</sub>
03F2 <sub>16</sub>			
03F3 <sub>16</sub>			
03F4 <sub>16</sub>			
03F5 <sub>16</sub>			
03F6 <sub>16</sub>			
03F7 <sub>16</sub>			
03F8 <sub>16</sub>			
03F9 <sub>16</sub>			
03FA <sub>16</sub>			
03FB <sub>16</sub>			
03FC <sub>16</sub>			
03FD <sub>16</sub>			
03FE <sub>16</sub>			
03FF <sub>16</sub>	Port control register	PCR	XXXX XXX0 <sub>2</sub>

X: Indeterminate



Blank spaces are reserved. No access is allowed.

# Package Dimensions

## 144P6Q-A

### Plastic 144pin 20X20mm body LQFP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
LQFP144-P-2020-0.50	-	1.23	Cu Alloy

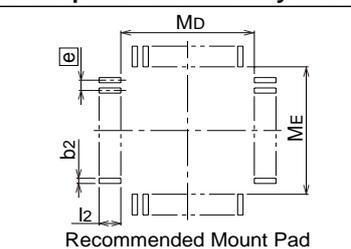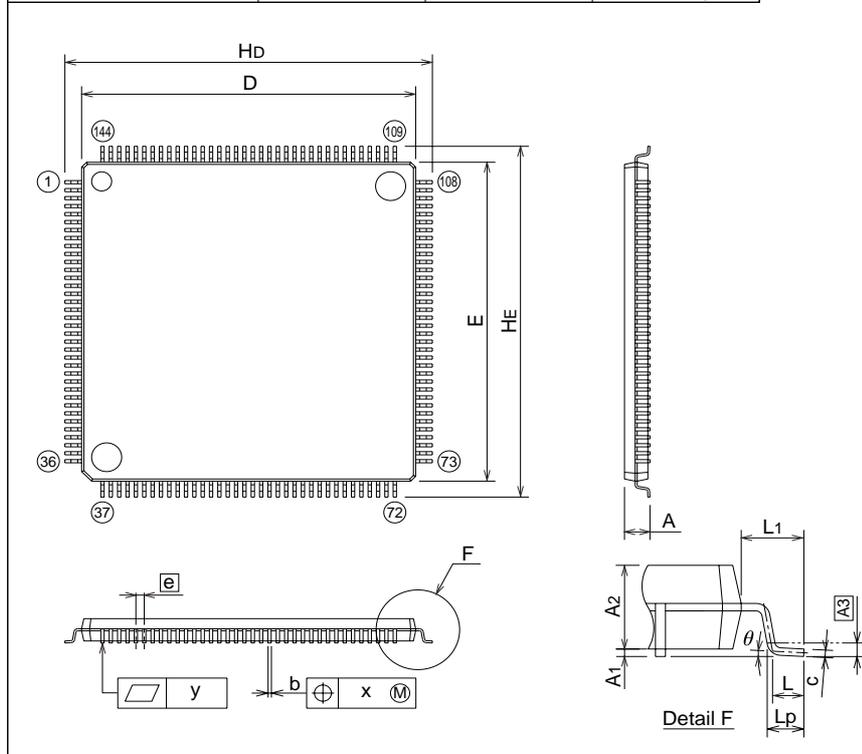



Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	-	-	1.7
A1	0.05	0.125	0.2
A2	-	1.4	-
b	0.17	0.22	0.27
c	0.105	0.125	0.175
D	19.9	20.0	20.1
E	19.9	20.0	20.1
e	-	0.5	-
Hd	21.8	22.0	22.2
HE	21.8	22.0	22.2
L	0.35	0.5	0.65
L1	-	1.0	-
Lp	0.45	0.6	0.75
A3	-	0.25	-
x	-	-	0.08
y	-	-	0.1
theta	0°	-	8°
b2	-	0.225	-
l2	0.95	-	-
Md	-	20.4	-
ME	-	20.4	-

## 100P6S-A

### Plastic 100pin 14X20mm body QFP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
QFP100-P-1420-0.65	-	1.58	Alloy 42

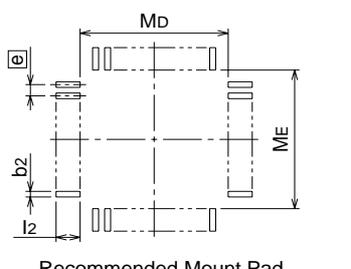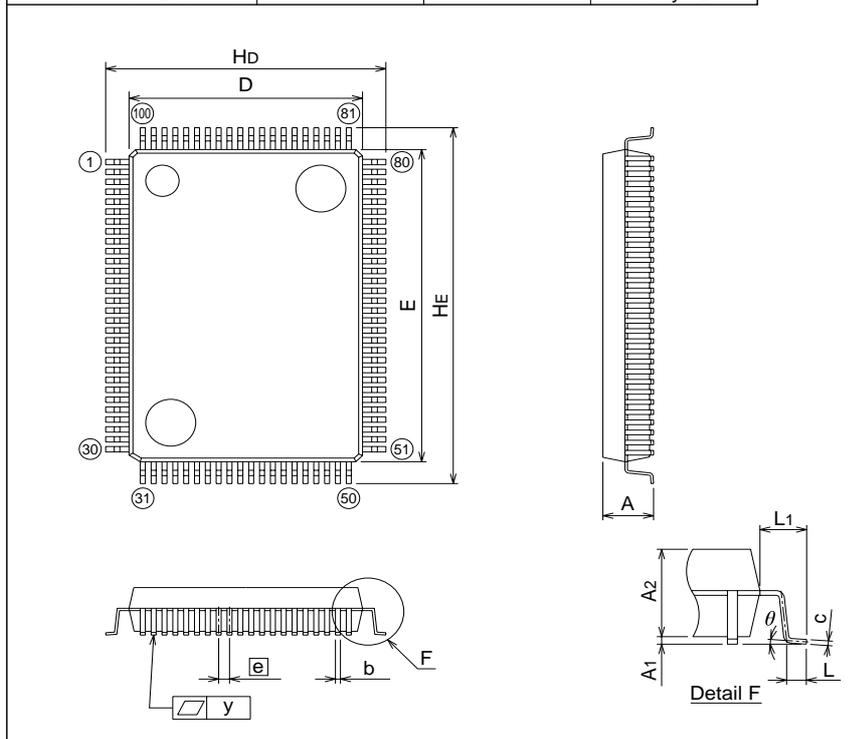

Recommended Mount Pad



Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	-	-	3.05
A1	0	0.1	0.2
A2	-	2.8	-
b	0.25	0.3	0.4
c	0.13	0.15	0.2
D	13.8	14.0	14.2
E	19.8	20.0	20.2
e	-	0.65	-
Hd	16.5	16.8	17.1
HE	22.5	22.8	23.1
L	0.4	0.6	0.8
L1	-	1.4	-
y	-	-	0.1
theta	0°	-	10°
b2	-	0.35	-
l2	1.3	-	-
Md	-	14.6	-
ME	-	20.6	-

**100P6Q-A**

(MMP)

**Plastic 100pin 14X14mm body LQFP**

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
LQFP100-P-1414-0.50	-	0.63	Cu Alloy

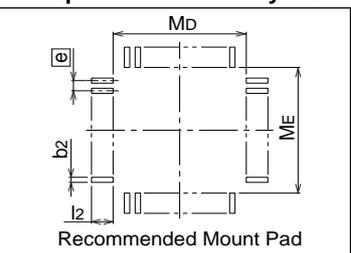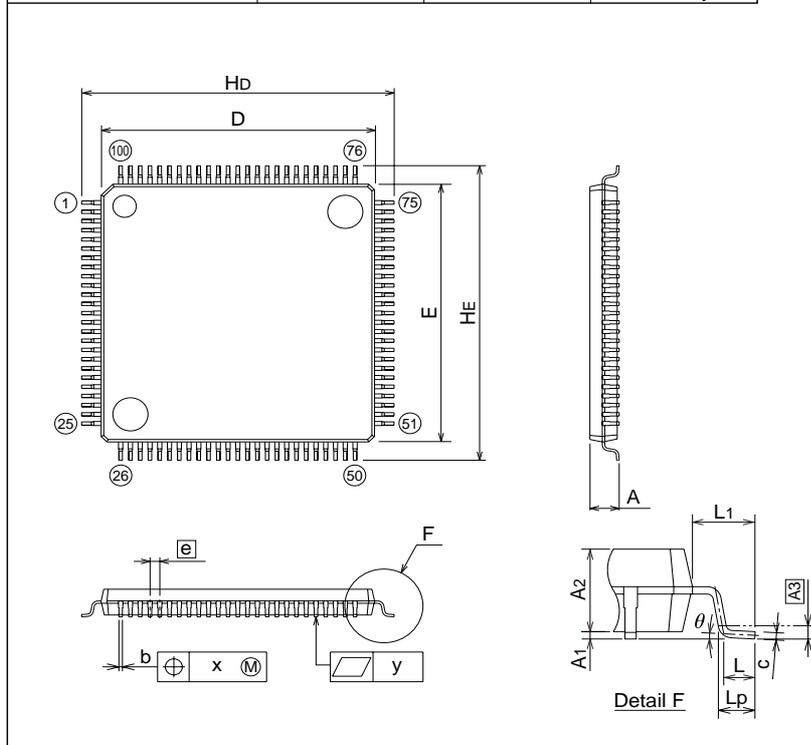

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	-	-	1.7
A1	0	0.1	0.2
A2	-	1.4	-
b	0.13	0.18	0.28
c	0.105	0.125	0.175
D	13.9	14.0	14.1
E	13.9	14.0	14.1
e	-	0.5	-
Hd	15.8	16.0	16.2
HE	15.8	16.0	16.2
L	0.3	0.5	0.7
L1	-	1.0	-
Lp	0.45	0.6	0.75
A3	-	0.25	-
x	-	-	0.08
y	-	-	0.1
theta	0°	-	10°
b2	-	0.225	-
l2	0.9	-	-
MD	-	14.4	-
ME	-	14.4	-



**Keep safety first in your circuit designs!**

1. Renesas Technology Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

**Notes regarding these materials**

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corporation product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation or a third party.
  2. Renesas Technology Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
  3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor for the latest product information before purchasing a product listed herein.  
The information described here may contain technical inaccuracies or typographical errors.  
Renesas Technology Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.  
Please also pay attention to information published by Renesas Technology Corporation by various means, including the Renesas Technology Corporation Semiconductor home page (<http://www.renesas.com>).
  4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
  5. Renesas Technology Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
  6. The prior written approval of Renesas Technology Corporation is necessary to reprint or reproduce in whole or in part these materials.
  7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.  
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
  8. Please contact Renesas Technology Corporation for further details on these materials or the products contained therein.
- 



<http://www.renesas.com>

