


Datasheet

DHPVA-100

Variable Gain 100 MHz Wideband Voltage Amplifier

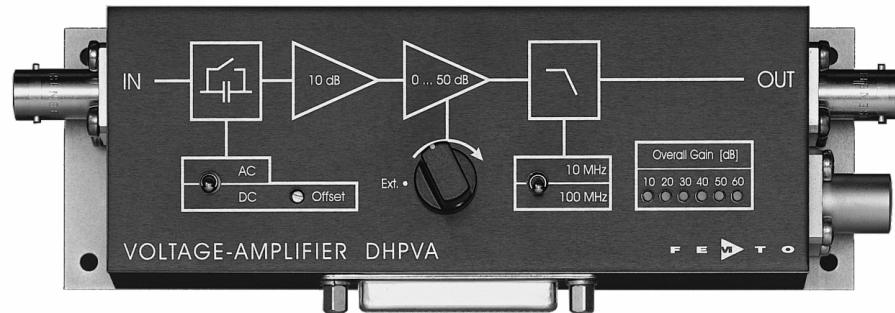


Features

- **Variable Gain 10 to 60 dB, Switchable in 10 dB Steps**
- **Bandwidth DC ... 100 MHz, Switchable to 10 MHz**
- **Built-In Temperature Compensation for Low Drift of 0.6 $\mu\text{V/K}$**
- **2.5 nV/ $\sqrt{\text{Hz}}$ Input Noise**
- **Switchable AC/DC-Coupling**
- **Bandwidth, Frequency- and Pulse Response Independent of Gain Setting**
- **Local and Remote Control**
- **DC Monitor Output**

Applications

- **Oscilloscope and Transient-Recorder Preamplifier**
- **Photomultiplier and Microchannel-Plate Amplifier**
- **Signal-Booster for Optical Receivers and Current Amplifiers**
- **Time-Resolved Pulse and Transient Measurements**
- **Automated Measurement Systems**
- **Integration in Compact Systems**

Block Diagram

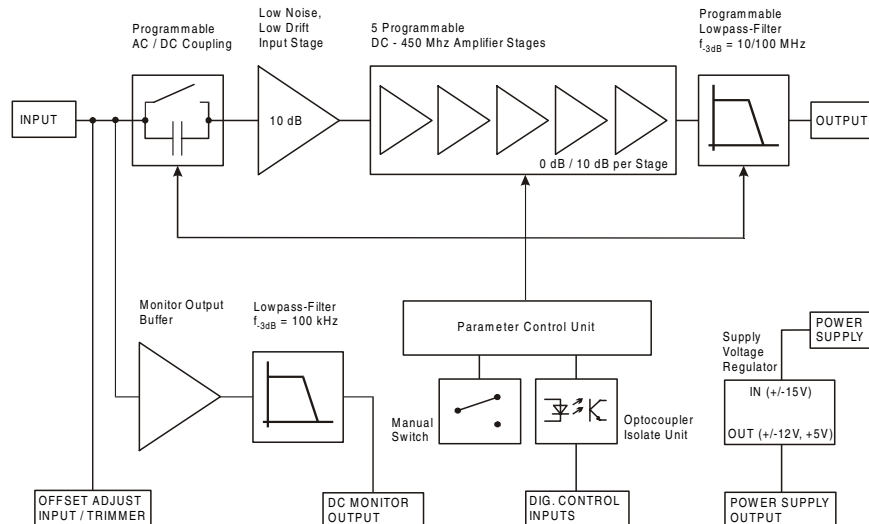

BS01-0540-17


Variable Gain 100 MHz Wideband Voltage Amplifier

Specifications	<i>Test Conditions</i>	<i>V_s = ± 15 V, T_a = 25°C, System Impedance = 50 Ω</i>
Gain	Gain Values Gain Accuracy	10, 20, 30, 40, 50, 60 dB ± 0.15 dB (between settings) ± 0.3 dB (overall)
Frequency Response	Lower Cut-Off Frequency Upper Cut-Off Frequency Upper Cut-Off Frequency Rolloff	DC / 10 Hz 100 MHz, switchable to 10 MHz (approx. Bessel filter characteristic for clear pulse response) 25 dB/Oct.
Time Response	Rise / Fall Time (10% - 90%)	3.5 ns (@ 100 MHz) 35 ns (@ 10 MHz)
Input	Input Impedance Input Voltage Drift Equivalent Input Voltage Noise Equivalent Input Current Noise 1/f-Noise Corner Input BIAS Current Input Offset Voltage	50 Ω // 5 pF 0.6 μV/K 2.5 nV/√Hz (@ 30 – 60 dB gain) 3.0 pA/√Hz 15 kHz < 200 nA - 10 mV ... + 10 mV, adjustable by offset-trimmer and external control voltage
Output	Output Impedance Output Voltage Range Output Power (max.) Output Current (max.) THD	50 Ω (terminate with 50 Ω load for best performance) 2 V _{pp} (for linear amplification) + 10 dBm 70 mA < 0.5 % (@ 10 MHz, 1 V _{pp})
Monitor Output	Monitor Output Gain Monitor Output Voltage Range Monitor Output Current Monitor Output Bandwidth	1 ± 5 V ± 10 mA DC ... 100 kHz
Indicator LED	Function	gain setting
Digital Control	Control Input Voltage Range Control Input Current Gain Control Switching Time	Low: - 0.8 ... + 0.8 V High: + 1.8 ... + 12 V, TTL / CMOS compatible 0 mA @ 0V, 1.5 mA @ + 5 V, 4.5 mA @ + 12V 5 ms
Ext. Offset Control	Control Voltage Range Offset Control Input Impedance	± 10 V, corresponds to ± 10 mV input offset 200 kΩ
Power Supply	Supply Voltage Supply Current Stabilized Power Supply Output	± 15 V ± 120 mA typ. (depends on operating conditions, recommended power supply capability minimum 250 mA) ± 12 V / max. 100 mA, + 5V / max. 50 mA
Case	Weight Material	350 g (0.81 lbs) AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature Operating Temperature	- 40 °C ... + 100 °C 0 °C ... + 60 °C

Datasheet**DHPVA-100**

Variable Gain 100 MHz Wideband Voltage Amplifier

Absolute Maximum Ratings	Power Supply Voltage $\pm 20\text{ V}$ Signal Input Voltage $\pm 5\text{ V}$ Digital Control Input Voltage $+ 16\text{ V} / - 5\text{ V}$								
Connectors	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Input</td> <td>BNC</td> </tr> <tr> <td>Output</td> <td>BNC</td> </tr> <tr> <td>Power Supply</td> <td> LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND </td> </tr> <tr> <td style="vertical-align: top;">Control Port</td> <td> Sub-D 25-pin, female, qual. class 2 Pin 1: +12V (stabilized power supply output) Pin 2: -12V (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: +5V (stabilized power supply output) Pin 5: monitor output Pin 6, 7: NC Pin 8: offset control voltage input Pin 9: DGND (ground f. digital control Pin 10 - 25) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: 100 MHz/10 MHz Pin 15 - 25: NC </td> </tr> </table>	Input	BNC	Output	BNC	Power Supply	LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND	Control Port	Sub-D 25-pin, female, qual. class 2 Pin 1: +12V (stabilized power supply output) Pin 2: -12V (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: +5V (stabilized power supply output) Pin 5: monitor output Pin 6, 7: NC Pin 8: offset control voltage input Pin 9: DGND (ground f. digital control Pin 10 - 25) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: 100 MHz/10 MHz Pin 15 - 25: NC
Input	BNC								
Output	BNC								
Power Supply	LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND								
Control Port	Sub-D 25-pin, female, qual. class 2 Pin 1: +12V (stabilized power supply output) Pin 2: -12V (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: +5V (stabilized power supply output) Pin 5: monitor output Pin 6, 7: NC Pin 8: offset control voltage input Pin 9: DGND (ground f. digital control Pin 10 - 25) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: 100 MHz/10 MHz Pin 15 - 25: NC								



Variable Gain 100 MHz Wideband Voltage Amplifier

Remote Control Operation

General

Remote control input bits are opto-isolated and connected by logical OR to local switch setting. For remote control a switch setting, set the corresponding local switch to "Ext.", "AC" or "10 MHz" and select the wanted setting via a bit-code at the corresponding digital inputs. Mixed operation, e.g. local gain setting and remote controlled bandwidth setting is also possible.

Gain Setting

Gain	Pin 10	Pin 11	Pin 12
10 dB	low	low	low
20 dB	high	low	low
30 dB	low	high	low
40 dB	high	high	low
50 dB	low	low	high
60 dB	high	low	high

AC/DC Setting


Coupling	Pin 13
AC	low
DC	high

Bandwidth Setting

Bandwidth	Pin 14
10 MHz	low
100 MHz	high

Typical Performance Characteristics

Frequency Response (Logarithmic)

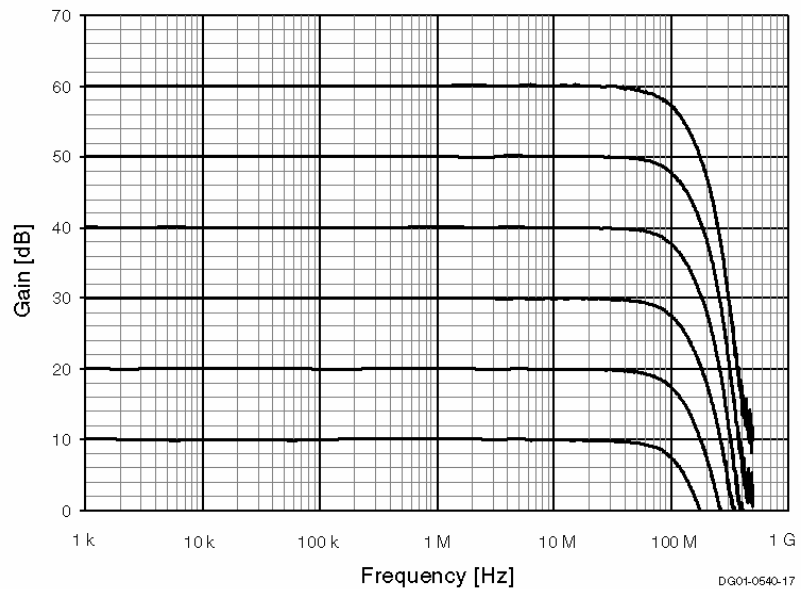


Datasheet

DHPVA-100

Variable Gain 100 MHz Wideband Voltage Amplifier

Dimensions

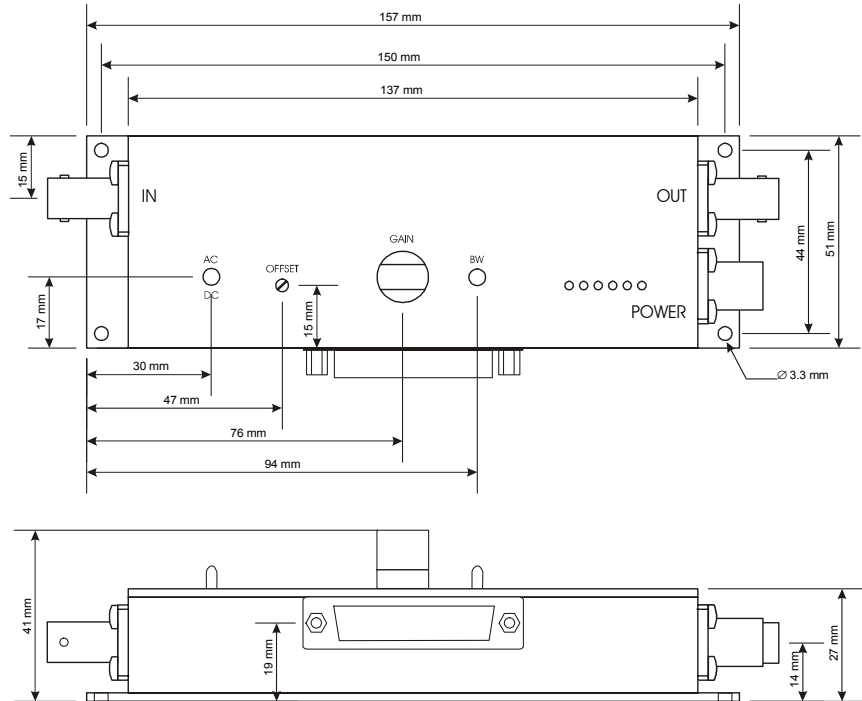

D201-0540-17

FEMTO Messtechnik GmbH
 Klosterstr. 64
 D-10179 Berlin · Germany
 Tel.: +49-(0)30-280 4711-0
 Fax: +49-(0)30-280 4711-11
 e-mail: info@femto.de
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH
 Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY





Datasheet

LUCI-10

**USB to D-Sub Control Interface
for FEMTO Amplifiers**



Features	<ul style="list-style-type: none"> • Compact Digital I/O Interface for USB Remote Control of FEMTO Amplifiers • Supports Opto-Isolation of Amplifier Signal Path from PC USB Port • 16 Digital Outputs, 3 Opto-Isolated Digital Inputs • Bus-Powered Operation • System Driver, Application Software and VI's for use with LabVIEW™ Included
Applications	<ul style="list-style-type: none"> • Remote Control of FEMTO® Amplifiers and Photoreceivers Directly from a PC
Block Diagram	<p style="text-align: right;">BS-LUCI-10_R1</p>

Hardware Specifications	<table border="0"> <tr> <td data-bbox="259 1617 470 1648">General Characteristics</td> <td data-bbox="535 1617 665 1648">Bus Interface</td> <td data-bbox="844 1617 1039 1648">USB 2.0 (full-speed)</td> </tr> <tr> <td></td> <td data-bbox="535 1648 730 1680">Digital I/O Channels</td> <td data-bbox="844 1648 1088 1701">16 output lines 3 opto-isolated input lines</td> </tr> <tr> <td></td> <td data-bbox="535 1701 617 1732">Supply</td> <td data-bbox="844 1701 1282 1764">PC USB port, + 5 V, typ. 100 mA, bus-powered (no auxiliary power supply required)</td> </tr> <tr> <td></td> <td data-bbox="535 1764 649 1795">Connectors</td> <td data-bbox="844 1764 958 1795">USB type A</td> </tr> <tr> <td></td> <td data-bbox="535 1795 600 1827">Cable</td> <td data-bbox="844 1795 1039 1848">D-Sub, 25 pin, male AWG 28, length 1.8 m</td> </tr> <tr> <td data-bbox="259 1869 324 1900">Output</td> <td data-bbox="535 1869 730 1900">Number of Channels</td> <td data-bbox="844 1869 1347 1932">16 output lines, supporting opto-isolation inside FEMTO amplifiers and photoreceivers</td> </tr> <tr> <td></td> <td data-bbox="535 1932 747 1963">Output Voltage Range</td> <td data-bbox="844 1932 1364 1984">LOW bit: 0 ... + 0.5 V (@ 0 ... 2 mA output current) HIGH bit: + 4 ... + 5.5 V (@ 0 ... 2 mA output current)</td> </tr> <tr> <td></td> <td data-bbox="535 1984 665 2016">Max. Current</td> <td data-bbox="844 1984 1006 2016">6 mA per channel</td> </tr> <tr> <td></td> <td data-bbox="535 2016 665 2047">Writing Rate</td> <td data-bbox="844 2016 1153 2047">max. 800 operations per second</td> </tr> </table> <p>SUNSTAR自动化 http://www.sensor-ic.com/ TEL: 0755-83376489 FAX: 0755-83376182 E-MAIL: szss20@163.com</p>	General Characteristics	Bus Interface	USB 2.0 (full-speed)		Digital I/O Channels	16 output lines 3 opto-isolated input lines		Supply	PC USB port, + 5 V, typ. 100 mA, bus-powered (no auxiliary power supply required)		Connectors	USB type A		Cable	D-Sub, 25 pin, male AWG 28, length 1.8 m	Output	Number of Channels	16 output lines, supporting opto-isolation inside FEMTO amplifiers and photoreceivers		Output Voltage Range	LOW bit: 0 ... + 0.5 V (@ 0 ... 2 mA output current) HIGH bit: + 4 ... + 5.5 V (@ 0 ... 2 mA output current)		Max. Current	6 mA per channel		Writing Rate	max. 800 operations per second
General Characteristics	Bus Interface	USB 2.0 (full-speed)																										
	Digital I/O Channels	16 output lines 3 opto-isolated input lines																										
	Supply	PC USB port, + 5 V, typ. 100 mA, bus-powered (no auxiliary power supply required)																										
	Connectors	USB type A																										
	Cable	D-Sub, 25 pin, male AWG 28, length 1.8 m																										
Output	Number of Channels	16 output lines, supporting opto-isolation inside FEMTO amplifiers and photoreceivers																										
	Output Voltage Range	LOW bit: 0 ... + 0.5 V (@ 0 ... 2 mA output current) HIGH bit: + 4 ... + 5.5 V (@ 0 ... 2 mA output current)																										
	Max. Current	6 mA per channel																										
	Writing Rate	max. 800 operations per second																										

USB to D-Sub Control Interface for FEMTO Amplifiers

Software Specifications

Software
(included on CD)

Device Driver	dynamic link library (DLL) for integration in Microsoft Windows [®] operating system for use with C/C++, LabWindows [™] /CVI [™] or LabVIEW [™]
Application Software	GUI (graphical user interface) programs for simple remote control of FEMTO amplifiers and photoreceivers provided as executable programs and LabVIEW projects
LabVIEW Programs	sample programs to control and test the LUCI-10 hardware (including front panel and block diagram)
LabVIEW Library	special VI toolkit for integration in LabVIEW development environment

Note: A National Instruments LabVIEW[™] license is not included in this software package. For use of the GUI application programs the LabVIEW Run-Time Engine is required. If not detected on the host PC during the installation process the LabVIEW Run-Time Engine will be installed automatically from the CD.

System Requirements

Operating System	Microsoft Windows XP with Service Pack 2, or higher
Processor	Intel Pentium III or AMD Athlon, or better
System Memory	512 MB of RAM, or more
Hard Disk Space	about 200 MB
Interface Port	USB 1.1 or USB 2.0
Supported FEMTO Modules	any standard FEMTO amplifier or photoreceiver with 25 pin D-Sub socket, except model HLVA-100

Optional Requirements

For development of own application programs an additional development environment like LabVIEW Version 8 (or higher) or C/C++ is required.

Legal Notice

LabVIEW, CVI, National Instruments and NI are trademarks of National Instruments. Neither FEMTO Messtechnik GmbH, nor any software programs or other goods or services offered by FEMTO Messtechnik GmbH, are affiliated with, endorsed by, or sponsored by National Instruments.

The mark LabWindows is used under a license from Microsoft Corporation.


Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

FEMTO and the FEMTO logo are trademarks or registered trademarks of FEMTO Messtechnik GmbH in Germany, the U.S. and/or other countries.

Product and company names mentioned may also be trademarks or trade names of their respective companies used here for identification purposes only.

USB to D-Sub Control Interface for FEMTO Amplifiers

Dimensions

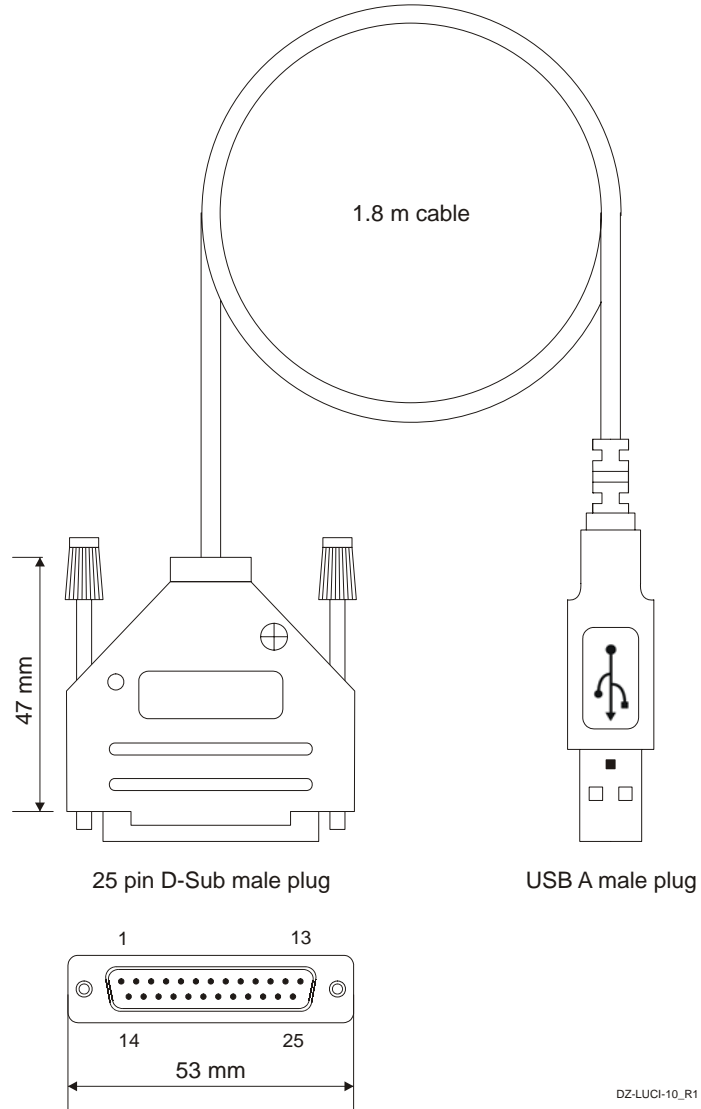

FEMTO Messtechnik GmbH
Paul-Lincke-Ufer 34
D-10999 Berlin · Germany
Tel.: +49 (0)30 – 4 46 93 86
Fax: +49 (0)30 – 4 46 93 88
e-mail: info@femto.de
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
© by FEMTO Messtechnik GmbH
Printed in Germany