




Datasheet


HVA-500M-20-B

**True DC-Coupled 500 MHz
Low Noise Voltage Amplifier**

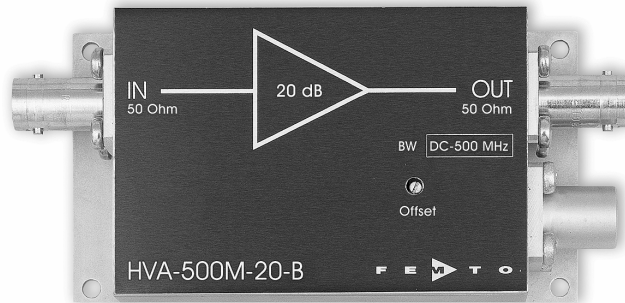

Features	<ul style="list-style-type: none"> • Gain 20 dB (x10) • Bandwidth DC ... 500 MHz • True DC-Coupling, Adjustable Output Offset Voltage • 3.0 nV/√Hz Input Noise 																																																	
Applications	<ul style="list-style-type: none"> • Oscilloscope and Transient Recorder Preamplifier • Ideal for Analyzing Digital Signals (No Baseline Shift at any Digital Code) • Photomultiplier and Microchannel Plate Amplifier • Signal Booster for Optical Receivers and Current Amplifiers • Time-Resolved Pulse and Transient Measurements 																																																	
Specifications	<table border="0"> <tr> <td></td> <td><i>Test Conditions</i></td> <td><i>Vs = ± 15 V, Ta = 25°C</i></td> </tr> <tr> <td rowspan="2">Gain</td> <td>Gain</td> <td>20 dB (@ 50 Ω load)</td> </tr> <tr> <td>Gain Accuracy</td> <td>± 0.2 dB</td> </tr> <tr> <td rowspan="3">Frequency Response</td> <td>Lower Cut-Off Frequency</td> <td>DC</td> </tr> <tr> <td>Upper Cut-Off Frequency (-3 dB)</td> <td>500 MHz (± 10 %)</td> </tr> <tr> <td>Rise/Fall Time (10% - 90%)</td> <td>750 ps</td> </tr> <tr> <td rowspan="6">Input</td> <td>Input Impedance</td> <td>50 Ω 3 pF</td> </tr> <tr> <td>Input Voltage Noise</td> <td>3.0 nV/√Hz (@ 200 MHz)</td> </tr> <tr> <td>Integrated Input Noise</td> <td>0.5 mV peak-peak</td> </tr> <tr> <td>Input Bias Current</td> <td>15 μA typ.</td> </tr> <tr> <td>Input Offset Voltage</td> <td>1 mV typ.</td> </tr> <tr> <td>Input Voltage Drift</td> <td>10 μV / °C</td> </tr> <tr> <td rowspan="5">Output</td> <td>Output Impedance</td> <td>50 Ω (terminate with 50 Ω load for best performance)</td> </tr> <tr> <td>Output Voltage</td> <td>± 1 V (@ 50 Ω load, for linear amplification)</td> </tr> <tr> <td>Max. Output Current</td> <td>100 mA</td> </tr> <tr> <td>Output Offset Trimmer Range</td> <td>± 100 mV</td> </tr> <tr> <td>Slew Rate</td> <td>2,600 V/μs (@ 50 Ω load)</td> </tr> <tr> <td rowspan="2">Power Supply</td> <td>Supply Voltage</td> <td>± 15 V</td> </tr> <tr> <td>Supply Current</td> <td>± 40 mA typ. (depends on operating conditions, recommended power supply capability minimum ± 150 mA)</td> </tr> <tr> <td rowspan="3">Case</td> <td>Weight</td> <td>200 g (0.5 lbs)</td> </tr> <tr> <td>Material</td> <td>AlMg4.5Mn, nickel-plated</td> </tr> </table>		<i>Test Conditions</i>	<i>Vs = ± 15 V, Ta = 25°C</i>	Gain	Gain	20 dB (@ 50 Ω load)	Gain Accuracy	± 0.2 dB	Frequency Response	Lower Cut-Off Frequency	DC	Upper Cut-Off Frequency (-3 dB)	500 MHz (± 10 %)	Rise/Fall Time (10% - 90%)	750 ps	Input	Input Impedance	50 Ω 3 pF	Input Voltage Noise	3.0 nV/√Hz (@ 200 MHz)	Integrated Input Noise	0.5 mV peak-peak	Input Bias Current	15 μA typ.	Input Offset Voltage	1 mV typ.	Input Voltage Drift	10 μV / °C	Output	Output Impedance	50 Ω (terminate with 50 Ω load for best performance)	Output Voltage	± 1 V (@ 50 Ω load, for linear amplification)	Max. Output Current	100 mA	Output Offset Trimmer Range	± 100 mV	Slew Rate	2,600 V/μs (@ 50 Ω load)	Power Supply	Supply Voltage	± 15 V	Supply Current	± 40 mA typ. (depends on operating conditions, recommended power supply capability minimum ± 150 mA)	Case	Weight	200 g (0.5 lbs)	Material	AlMg4.5Mn, nickel-plated
	<i>Test Conditions</i>	<i>Vs = ± 15 V, Ta = 25°C</i>																																																
Gain	Gain	20 dB (@ 50 Ω load)																																																
	Gain Accuracy	± 0.2 dB																																																
Frequency Response	Lower Cut-Off Frequency	DC																																																
	Upper Cut-Off Frequency (-3 dB)	500 MHz (± 10 %)																																																
	Rise/Fall Time (10% - 90%)	750 ps																																																
Input	Input Impedance	50 Ω 3 pF																																																
	Input Voltage Noise	3.0 nV/√Hz (@ 200 MHz)																																																
	Integrated Input Noise	0.5 mV peak-peak																																																
	Input Bias Current	15 μA typ.																																																
	Input Offset Voltage	1 mV typ.																																																
	Input Voltage Drift	10 μV / °C																																																
Output	Output Impedance	50 Ω (terminate with 50 Ω load for best performance)																																																
	Output Voltage	± 1 V (@ 50 Ω load, for linear amplification)																																																
	Max. Output Current	100 mA																																																
	Output Offset Trimmer Range	± 100 mV																																																
	Slew Rate	2,600 V/μs (@ 50 Ω load)																																																
Power Supply	Supply Voltage	± 15 V																																																
	Supply Current	± 40 mA typ. (depends on operating conditions, recommended power supply capability minimum ± 150 mA)																																																
Case	Weight	200 g (0.5 lbs)																																																
	Material	AlMg4.5Mn, nickel-plated																																																

Datasheet**HVA-500M-20-B****True DC-Coupled 500 MHz
Low Noise Voltage Amplifier**


Specifications (continued)		
Temperature Range	Storage Temperature Operating Temperature	- 40 ... + 100 °C 0 ... + 60 °C
Absolute Maximum Ratings	Power Supply Voltage Input Voltage	± 20 V ± 5 V
Connectors	Input Output Power Supply	BNC BNC LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND
		

Datasheet

HVA-500M-20-B

True DC-Coupled 500 MHz Low Noise Voltage Amplifier

Dimensions

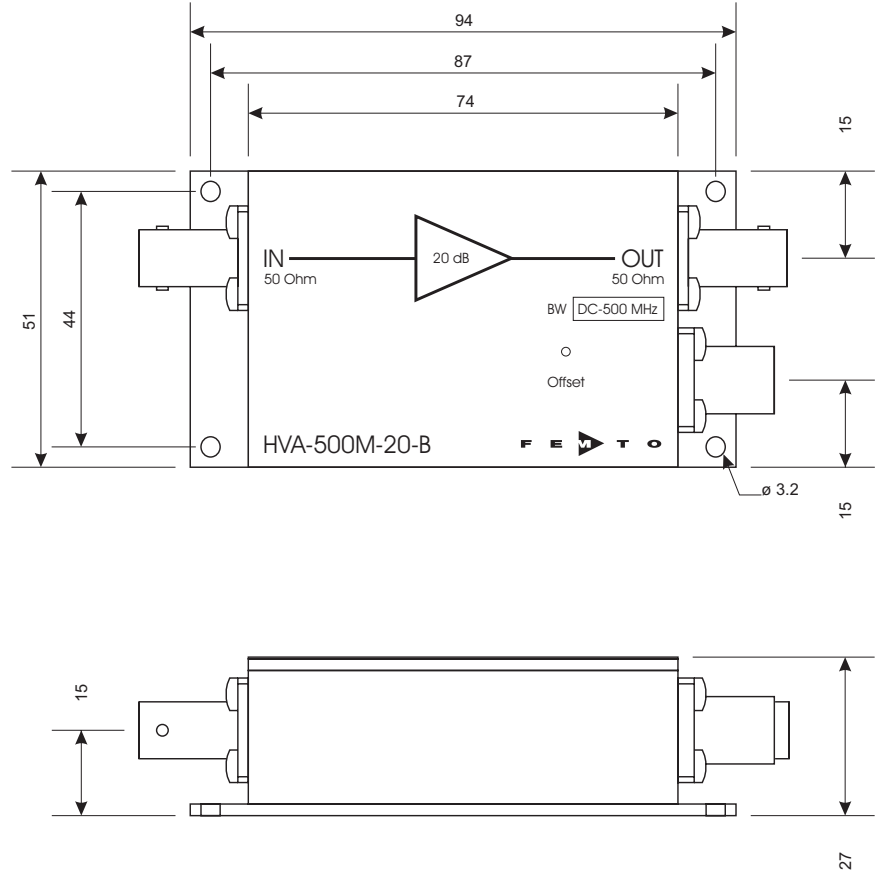

all measures in mm unless otherwise noted

DZ_HVA-500M-20_R2

FEMTO Messtechnik GmbH
Klosterstr. 64
D-10179 Berlin · Germany
Tel.: +49-(0)30-280 4711-0
Fax: +49-(0)30-280 4711-11
e-mail: info@femto.de
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH
Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

