




Product Description

The Sirenza Microdevices' SLX-2143 is a low noise amplifier module operating in the 1700 - 2200 MHz frequency band. This device has been optimized to serve high linearity base station applications where a high intercept point is required with low noise figure. The SLX-2143 uses PHEMT device technology, internal bias circuitry, and proven ceramic module technology to yield a high performance product with proven reliability. Internal RF matching is also included on both the input and output to provide an easy to implement, unconditionally stable, 50 ohm circuit block.


Noise Figure

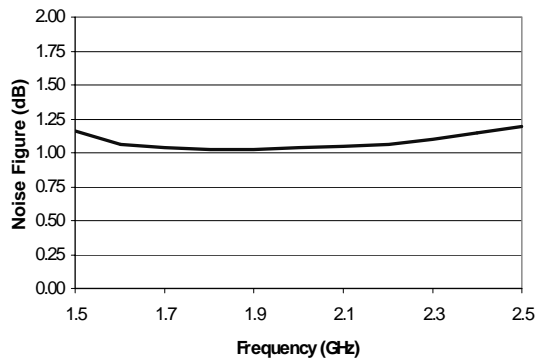

Preliminary

SLX-2143

1700-2200 MHz High Linearity Low Noise Amplifier Module



Product Features

- Very Low Noise Figure, 1.05dB
- High OIP₃ = +35dBm at 2GHz
- Gain = 15dB, Low Gain Slope
- 50Ω Input/Output Match, Stable
- Single Supply Operation, Self Biased

Applications

- PCS, TDMA, CDMA, WCDMA receivers

Product Specifications

Symbol	Parameters	Unit	Min.	Typ.	Max.	Min.	Typ.	Max.
F _O	Frequency Range	GHz	1.7		2.0	>2.0		2.2
S ₂₁	Gain	dB	13.5	15	16.5	13	14.5	16
S ₁₁	Input Return Loss	dB	10	12	-	10	12	-
S ₂₂	Output Return Loss	dB	10	13	-	10	13	-
NF	Noise Figure	dB	-	1.05	1.3	-	1.05	1.3
OIP ₃	Output Third Order Intercept Point	dBm	32	34	-	33	35	-
P _{1dB}	Compression Point	dBm		20			19	
GD	Group Delay	ns		<0.5			<0.5	
	Deviation from Linear Phase (over 100MHz)	degrees		<0.15			<0.1	
S ₁₂	Reverse Isolation	dB		-23			-23	
V _{dd}	Supply Voltage	V	4.75	5	5.25			
I _{dd}	Supply Current	mA	90	108	120			
R _{th}	Thermal Resistance (junction-back)	°C/W		80				

All parameters measured in a 50 ohm system, V_{dd}=5V, T=25°C. OIP₃ measured at a power of 6dBm per tone, 6MHz tone spacing.
NOTE: For applications between 2.2 - 2.5GHz please contact apps@sirenza.com

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions. Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems.

Copyright 2002 Sirenza Microdevices, Inc. All worldwide rights reserved.

522 Almanor Ave., Sunnyvale, CA 94085

Phone: (800) SMI-MMIC

1

<http://www.sirenza.com>

EDS-102501 Rev B



Preliminary
SLX-2143 1700-2200 MHz LNA Module





Absolute Maximum Ratings

Parameters	Value	Unit
Supply Current (I _{dd})	150	mA
Device Voltage (V _{dd})	5.5	V
Operating Temperature	-40 to +85	°C
Storage Temperature Range	-65 to +150	°C
Peak Reflow Temperature (30sec)	+230	°C
Operating Junction Temperature	+150	°C
Maximum Input Power	+20	dBm

Subjecting this device at or beyond any one of these limits may cause permanent damage. For reliable operation, the device operating voltage and current must not exceed the maximum values shown in the "Product Specifications" table.







Bias conditions should also satisfy the following expression:

$V_{DD} I_{DD} R_{TH} < T_J - T_{OP}$, where T_J is the junction temperature (150°C) and T_{OP} is the board temperature.

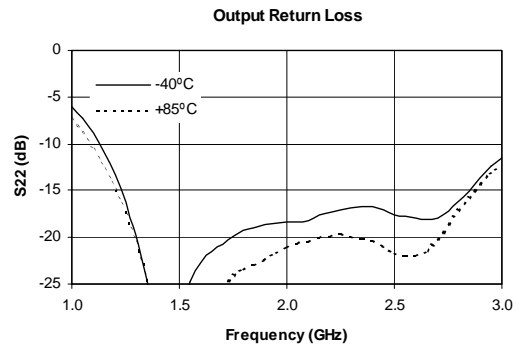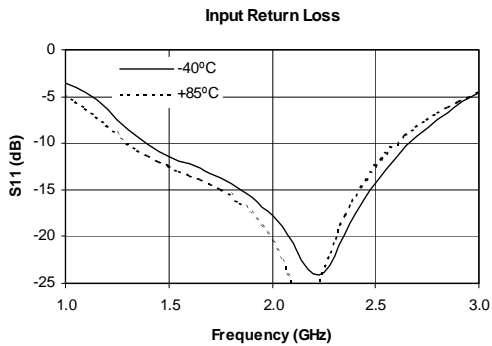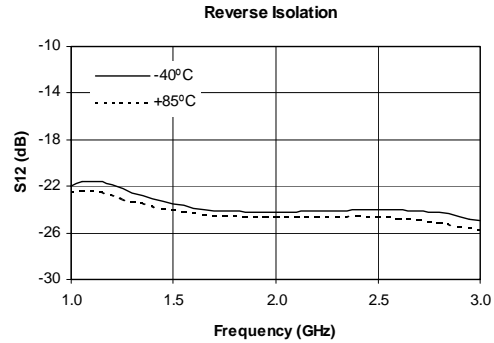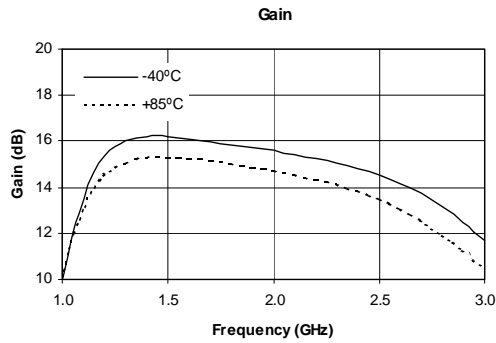



Preliminary
SLX-2143 1700-2200 MHz LNA Module

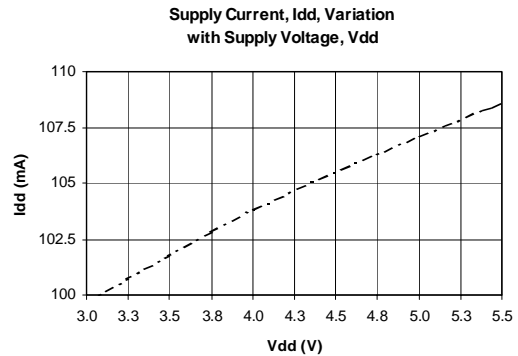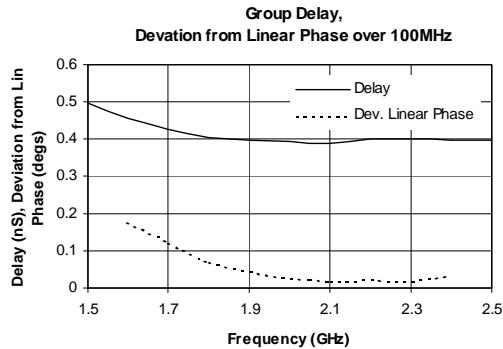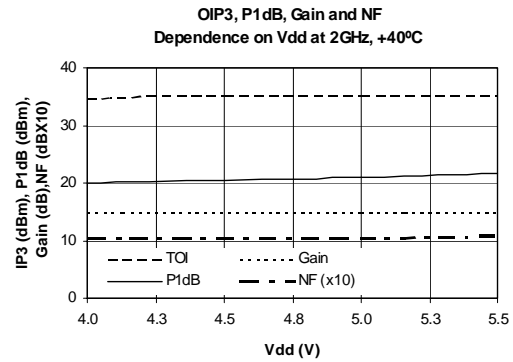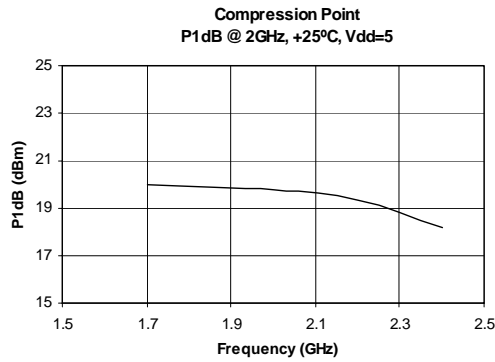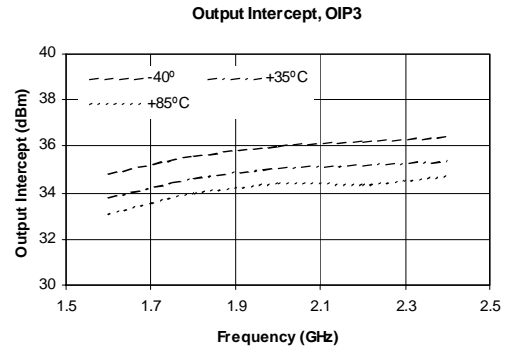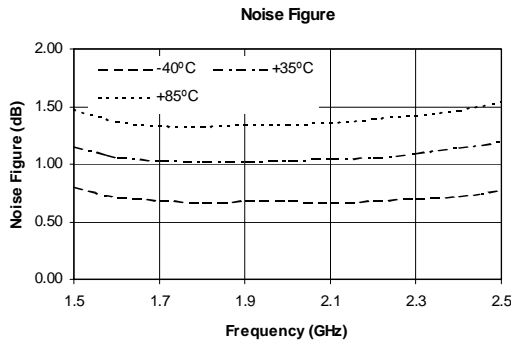



Preliminary

SLX-2143 1700-2200 MHz LNA Module



Caution: ESD Sensitive
Appropriate precaution in handling, packaging and testing devices must be observed.

Part Number Ordering Information


Part Number	Reel Size	Devices/Reel
SLX-2143	7"	500

Part Symbolization


The part will be symbolized with an "SLX2143" on the top surface of the package.

Pin #	Function	Description	Device Schematic
1	RF In	RF input pin. This pin is at DC ground. An external DC blocking capacitor should be used in most applications.	
2	RF Out/ DC Input	RF output and bias pin. Bias should be supplied to this pin through an external RF choke inductor. Because DC biasing is present on this pin, a DC blocking capacitor should be used in most applications (see application schematic). The supply side of the bias network should be well bypassed.	
3 Package Backside	GND	Connection to RF/DC ground. For best performance use via holes as shown in recommended PCB layout to reduce inductance and to provide adequate thermal path.	

Package Dimensions ("43" Ceramic Module)

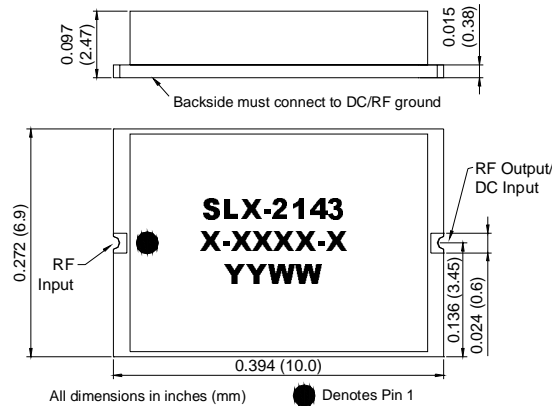


Test PCB Pad Layout

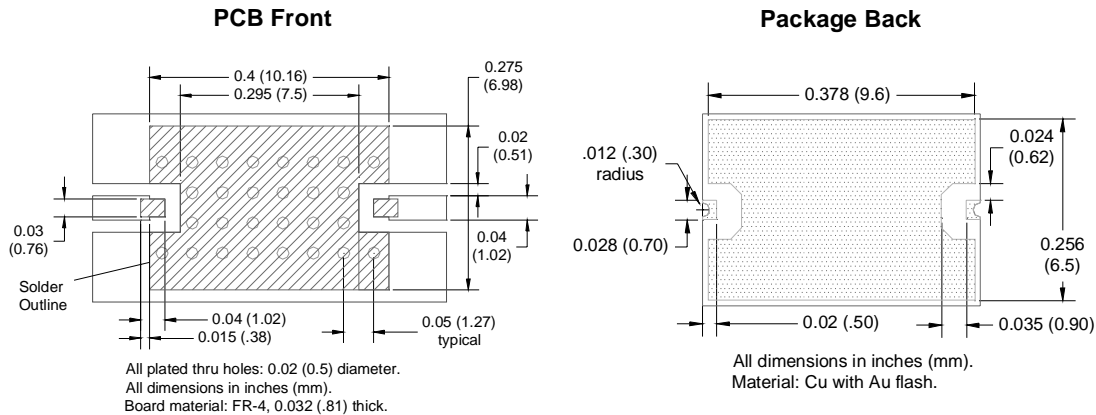



Preliminary
SLX-2143 1700-2200 MHz LNA Module


1.7GHz to 2.2GHz Application Schematic

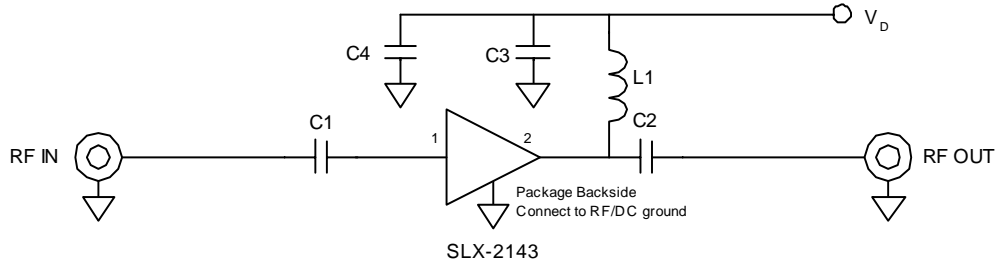

Bill of Materials

Component Designator	Value	Qty	Vendor	Part Number	Description
U1		1	SMDI	SLX-2143	High linearity low noise amplifier
S1, S2		2	Johnson Components	142-0701-851	SMA side mount connector
C1, C2	10 pF	2	Kemet	C0603C100J5GAC	0603 capacitor
C3	220 pF	1	Kemet	C0603C221J5GAC	0603 capacitor
C4	0.01 uF	1	Kemet	C0603C103K5RAC	0603 capacitor
R1	0Ω	1	Panasonic	POOGCTND	0603 jumper
J1		1	Sullins	S1312-2-ND	2 pin header
L1	47 nH	1	TOKO	LL1608-F47NK	0603 inductor

1.7GHz to 2.2GHz Test Board P/N EEB102508

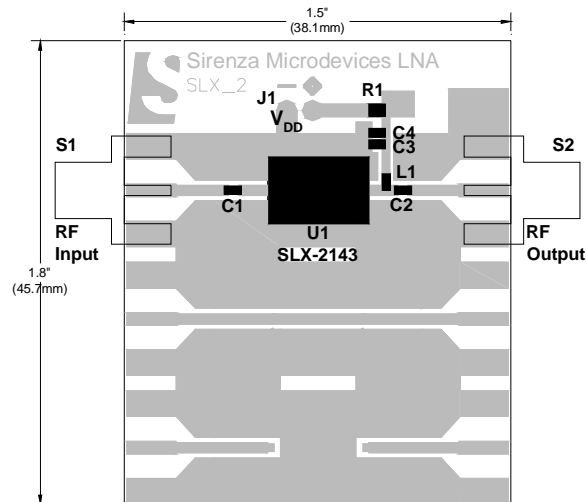



Preliminary

SLX-2143 1700-2200 MHz LNA Module

Abstract

This application note describes the components and materials that make up the SLX-2143 low noise amplifier module. It also describes the circuit board layout required for optimum performance, and procedures for reliable solder attachment.

Introduction

The SLX-2143 is a thick film hybrid low noise amplifier designed for 1.7 - 2.2GHz applications that require both low noise figure and good linearity. This module is based on conventional thick film circuit fabrication methods, and can be surface mounted onto circuit boards using industry standard solder reflow techniques. In order to extract peak performance from this amplifier, it is important to use an appropriate circuit board layout, and to ensure that the part is soldered down correctly. Please contact apps@sirenza.com if your application is between 2.2 - 2.5 GHz.

Materials

The base of the SLX-2143 is an alumina (ceramic) "thick film" substrate, 0.015" (.38mm) thick. The back of this substrate is metallized with plated copper (on a base layer of fired silver) that has been protected with a thin flash of nickel and gold to guarantee solderability, even after extended storage time. The ceramic substrate has via holes that are filled with a fired silver compound. On the component side of the substrate (the side that is covered with the lid) there are conductors based on plated copper (that are protected with a flash of nickel-gold), and pure gold conductors. The copper conductors are formed by plating copper onto a silver conductor that has been fired into the substrate. The fired silver base ensures excellent adhesion to the substrate, and the plated copper ensures that the silver is completely protected. The gold conductors are fired into the substrate and are used wherever wire bonds are required. Thick film resistors are also integrated onto this substrate. A glass passivation layer is used for additional protection, and to act as a solder dam.

Inside the module there are several different types of components in use. Solder terminated capacitors and inductors are attached with high temperature lead free (96.5% Sn 3.5% Ag) solder. Chip components are attached with conductive silver epoxy and are connected to the rest

of the circuit with gold wire-bonds. The module is sealed with a ceramic lid that is held down with a B-stage epoxy seal ring. The overall module is non-hermetic, but it will pass a standard "bubble" leak test.

The module is designed to be reflowed onto a laminate based circuit board such as FR4. Input and output connections to the module are made with "castellations" on either end of the module. Castellations are rounded metallized notches (metallized with silver, copper, nickel, gold, as in other parts of the module) in the edge of the ceramic substrate. When these are put through a solder reflow process, the solder tends to wick up into the notches, creating a robust solder fillet that can be easily inspected. The third connection, ground, is formed by the rest of the metal on the back of the module.

Board Design

As the module has the input, output, and ground connections on the same plane, in principal coplanar waveguide should be used to feed the module. In practice, microstrip can also be used as ground vias under the module connect the "top" ground to a microstrip ground plane. Care still needs to be taken to ensure a graceful transition from microstrip to coplanar waveguide. Care also needs to be taken to ensure that the medium leading up to the module (be it microstrip, coplanar waveguide, or grounded coplanar waveguide) is 50 ohms, with minimal loss. The dimensions used in the evaluation board are recommended (they yield a return loss of 27dB at 2 GHz) if that material structure can be adapted.


The evaluation board layout is shown in Figure 1. The DC blocks, bias inductor, and decoupling capacitors are also shown on the board. The coplanar line leading up to the module has a width of 0.04" (1.0mm) with a spacing of 0.02" (0.5mm) to the coplanar ground. The thickness of the board dielectric, FR4, is 0.032" (0.81mm), although typically the overall board thickness is increased with additional layers. One ounce copper is used on both sides. At 2.5GHz, the performance of the FR-4 board material is becoming marginal, so users may find it necessary to adjust the tuning of the part with external turning elements if operating at this frequency.

Sirenza Microdevices will provide the detailed layout (in AutoCAD format) to users wishing to use the same layout and materials.



Preliminary
SLX-2143 1700-2200 MHz LNA Module

Figure 1: Evaluation Board Layout

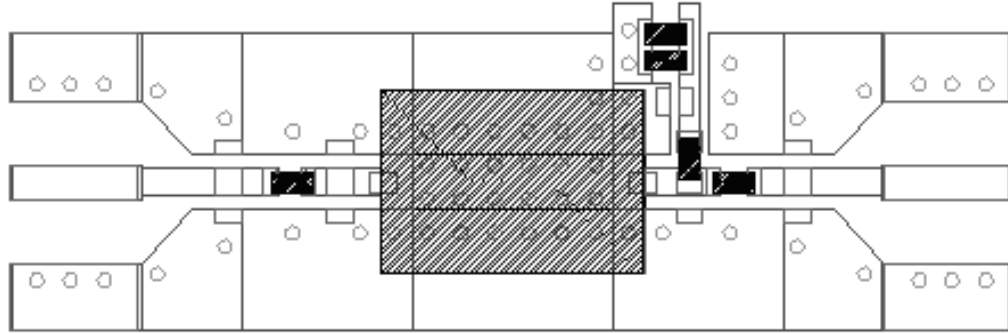

Solder Reflow

The module is designed to be soldered onto a pad that has an array of via holes for improved grounding. Note that the module is reasonably tolerant of voids in the solder coverage on the back, but that voids should be avoided because they can result in an increase in thermal impedance, which will result in the module running too hot. The gold content on the back is very small so solder embrittlement will not be a problem.

The module can be assembled onto a circuit board using standard oven or IR reflow profiles. It is difficult to recommend any single reflow profile because such profiles depend on the board size, other components on the board, and the reflow equipment in use. The most critical parameter is the peak temperature. Reflow profiles that have a peak temperature on the order of 220°C-240°C for 30 seconds will be adequate for this part. Lower peak temperatures can be used if the time is increased. For small volume prototype fabrication and rework, a hot plate running at about 250°C is recommended, with the part left on only until the solder reflows. Soldering irons are not recommended for mounting or removing the part.

There is a thermal coefficient of expansion mismatch between the module and typical circuit board material, but the small dimensions of the module make the strain induced into the module minimal, so no stress related problems should be encountered. If the module is mounted on a very thin laminate (such as FR-4 0.032" (0.81mm) or less), then care should be taken to avoid flexing the laminate, as the ceramic substrate could crack. This has not been observed on conventional thick circuit board materials. (The evaluation board is a three layer structure with two .032" thick dielectric layers.)

Conclusion

The SLX-2143 has been designed to be both easy to use and robust, and lab tests done at Sirenza Microdevices have repeatedly demonstrated this. By following the guidelines in this application note, excellent performance can be achieved. We hope that this application note and the products offered by Sirenza Microdevices will assist you in achieving your design goals. If there are any questions about this module or any other Sirenza Microdevices part, please contact us at apps@sirenza.com.

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382