


干簧开关---适用于普通低压电子产品	型号: MKA10110
--------------------	--------------

Dimensions

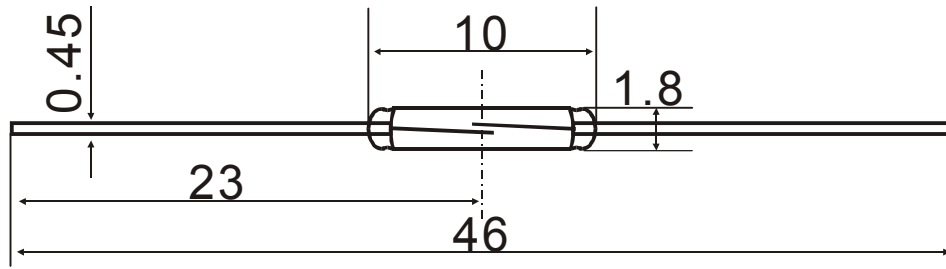

符合欧盟环保“ROHS 指令”要求

Unit:mm

Contact Form 触点形式	1A SPST-NO	
Contact Material 触点材质	Ru	
Max.Contact Rating 触点负载	10W	
Max.Switching Voltage 最大开关电压	100VDC	
Max.Switching Current 最大开关电流	0.5A	
Max.Initial Contact Resistance 最大触点电阻(初始值)	100mΩ	
Pull In Value(At) 启动值	10-15	
Drop out Value(At) 释放值	5	
Min.Breakdown Voltage 耐高压	220VDC(AT>25)	
Max.Contact Capacitance 触点电容	0.7pF	
Min.Insulation Resistance 绝缘电阻	10 <sup>10</sup> Ω	
Typ.Resonant Frequency 谐振频率	4KHZ	
Operation Temperature 工作温度	-55℃~+120℃	
Electrical Life (at Resistive Load) 电气寿命 (阻性负载)	10 <sup>8</sup> (5 VDC,10mA)	1×10 <sup>5</sup> (12 VDC,400mA)

--	--