

# TRANSMITTING POWER AMPLIFIER

## GaAs MMIC

### ■GENERAL DESCRIPTION


NJG1309VB2 is a positive voltage supply type GaAs power amplifier MMIC designed for Digital Cordless Phone.

Gate bias and Gain control bias terminals are supplied by positive voltage.

These terminals have high-impedance characteristics.

NJG1309VB2 can reduce power consumption at receiving mode by "Standby Function".

### ■PACKAGE OUTLINE




**NJG1309VB2**

### ■FEATURES

- Operating frequency range       $f=1.9\text{GHz typ.}$
- Positive voltage supply           $V_{DD2,3}=+3.0\text{V typ. } +V_{GG}=+1.0\text{V typ.}$
- Low current consumption         $150\text{mA typ. @}21\text{dBm output power}$
- High gain                             $37\text{dB typ. @}21\text{dBm output power}$
- Gain control range                 $26\text{dB typ. @}21\text{dBm output power}$
- Package                              SSOP20-B2 (Pin pitch 0.5mm)

### ■PIN CONFIGURATION

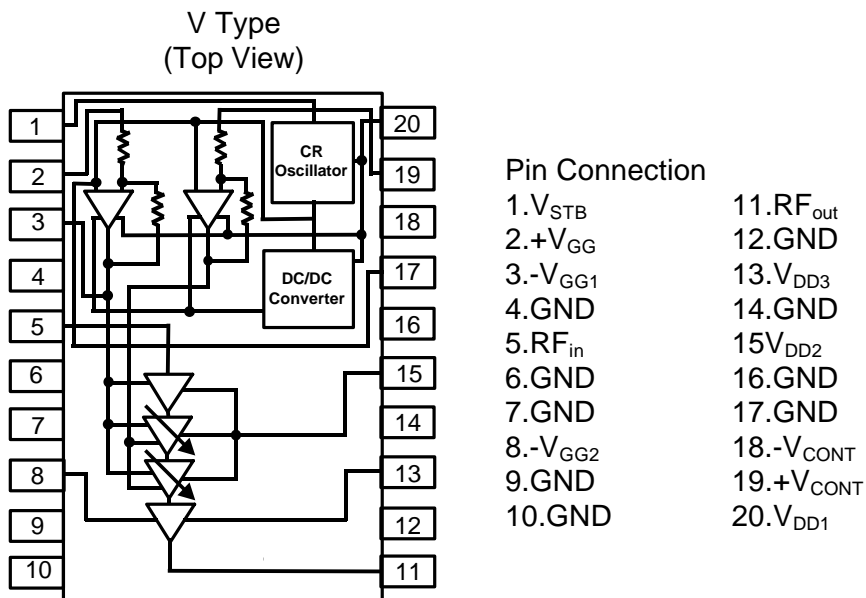

# NJG1309VB2

## ■ ABSOLUTE MAXIMUM RATINGS

( $Z_s=Z_l=50\Omega$ ,  $T_a=25^\circ\text{C}$ )

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNITS
Drain Voltage 1	$V_{DD1}$	$+V_{GG}=1.0\text{V}$	5.5	V
Drain Voltage 2	$V_{DD2,3}$	$+V_{GG}=1.0\text{V}$	6.0	V
Gate Voltage	$+V_{GG}$	$V_{DD2,3}=3.0\text{V}$	$-0.5\sim V_{DD1}+0.5$	V
Gain Control Voltage	$+V_{CONT}$	$V_{DD2,3}=3.0\text{V}$	$-0.5\sim V_{DD1}+0.5$	V
Standby Voltage	$V_{STB}$		$-0.5\sim V_{DD1}+0.5$	V
Input Power	$P_{in}$	$V_{DD2,3}=3.0\text{V}$ , $+V_{GG}=1.0\text{V}$	3.0	dBm
Power Dissipation	$P_D$	At on PCB board	600	mW
Operating Temperature	$T_{opr}$		$-40\sim+85$	$^\circ\text{C}$
Storage Temperature	$T_{stg}$		$-55\sim+150$	$^\circ\text{C}$

## ■ ELECTRICAL CHARACTERISTICS 1

( $V_{DD1}=3\text{V}$ ,  $V_{STB}=2.7\text{V}$ ,  $+V_{CONT}=0\text{V}$ ,  $f=1.9\text{GHz}$ ,  $Z_s=Z_l=50\Omega$ ,  $T_a=25^\circ\text{C}$ )

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating Frequency	freq	$V_{DD2,3}=3.0\text{V}$	1.85	1.90	1.95	GHz
Drain Voltage 1	$V_{DD1}$		2.7	3.0	5.2	V
Drain Voltage 2	$V_{DD2,3}$		2.9	3.0	5.2	V
Standby Terminal Input Voltage (H)	$V_{STB(H)}$		2.4	2.7	3.0	V
Standby Terminal Input Voltage (L)	$V_{STB(L)}$		0.0	0.0	0.6	V
Gain Control Voltage	$+V_{CONT}$		0.0	-	2.0	V
Gate Voltage	$+V_{GG}$	$V_{DD2,3}=3.0\text{V}$ , $I_{idle}=130\text{mA}$	0.6	1.0	1.4	V
Idle Current *1	$I_{idle}$	$V_{DD2,3}=3.0\text{V}$ , RF OFF	125	130	135	mA
Operating Current *1	$I_{DD2,3}$	$V_{DD2,3}=3.0\text{V}$ , $I_{idle}=130\text{mA}$ $P_{out}=21\text{dBm}$	-	150	165	mA
$V_{DD1}$ Terminal Current(H)	$I_{DD1(H)}$	$V_{DD2,3}=3\text{V}$ , $P_{out}=21\text{dBm}$	-	0.9	1.25	mA
$V_{DD1}$ Terminal Current(L)	$I_{DD1(L)}$	$V_{STB}=0\text{V}$ , $V_{DD2,3}=0\text{V}$	-	0.5	1.0	$\mu\text{A}$
$V_{GG1}$ Terminal Current	$I_{GG}$	$+V_{GG}=2.0\text{V}$	-	5	10	$\mu\text{A}$
$+V_{CONT}$ Terminal Current	$I_{CONT}$	$+V_{CONT}=2.0\text{V}$	-	5	10	$\mu\text{A}$

## ■ ELECTRICAL CHARACTERISTICS 1

( $V_{DD1}=3V$ ,  $V_{STB}=2.7V$ ,  $+V_{CONT}=0V$ ,  $f=1.9GHz$ ,  $Z_s=Z_l=50\Omega$ ,  $T_a=25^\circ C$ )

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
$V_{STB}$ Terminal Current	$I_{STB}$		-	0.5	1.0	$\mu A$
$-V_{GG}, -V_{CONT}$ Rise Time*2	TRDD	0.01 $\mu F$ Load Capacitance	-	-	400	$\mu SEC$
$-V_{GG}, -V_{CONT}$ Fall Time*2	$T_{STB}$		-	-	20	mSEC
$+V_{GG}$ Terminal Input Resistance	R1		300	500	700	$k\Omega$
$+V_{CONT}$ Terminal Input Resistance	R2		300	500	700	$k\Omega$
Power Gain	Gain	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$	34	37	40	dB
Gain Flatness	$G_{flat}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$	-	1.0	1.5	dB
Gain Control Range	$G_{cont}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$ $+V_{CONT}=0.0$ to $2.0V$	21	26	31	dB
Pout at 1dB Gain Compression point	$P_{-1dB}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$	-	21	-	dBm
Harmonics	$P_{hm}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$	-	-40	-30	dBc
Load VSWR tolerance	-	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$ , Load VSWR=1:4 All Phase	Parasitic oscillation for fundamental signal level: $\leq -60dBc$			-

\*1: Total current of  $V_{DD2}$  terminal and  $V_{DD3}$  terminal.

\*2: Timing chart of input terminal voltage is mentioned in the separate sheet of paper.

# NJG1309VB2

## ■ ELECTRICAL CHARACTERISTICS 2

( $V_{DD1}=3V$ ,  $V_{STB}=2.7V$ ,  $+V_{CONT}=0V$ ,  $f=1.765GHz$ ,  $Z_s=Z_l=50\Omega$ ,  $T_a=25^\circ C$ )

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating frequency	freq	$V_{DD2,3}=3.0V$	1.750	1.765	1.780	GHz
Drain Voltage 1	$V_{DD1}$		2.7	3.0	5.2	V
Drain Voltage 2	$V_{DD2,3}$		2.9	3.0	5.2	V
Standby Terminal Input Voltage (H)	$V_{STB}(H)$		2.4	2.7	3.0	V
Standby Terminal Input Voltage (L)	$V_{STB}(L)$		0.0	0.0	0.6	V
Gain Control Voltage	$+V_{CONT}$		0.0	-	2.0	V
Gate Voltage	$+V_{GG}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$	0.6	1.0	1.4	V
Idle Current *1	$I_{idle}$	$V_{DD2,3}=3.0V$ , RF OFF	125	130	135	mA
Operating Current *1	$I_{DD2,3}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$	-	155	-	mA
$V_{DD1}$ Terminal Current(H)	$I_{DD1}(H)$	$V_{DD2,3}=3V$ , $P_{out}=21dBm$	-	0.9	-	mA
$V_{DD1}$ Terminal Current(L)	$I_{DD1}(L)$	$V_{STB}=0V$ , $V_{DD2,3}=0V$	-	0.5	-	$\mu A$
$V_{GG}$ Terminal Current	$I_{GG}$	$+V_{GG}=2.0V$	-	5	-	$\mu A$
$+V_{CONT}$ Terminal Current	$I_{CONT}$	$+V_{CONT}=2.0V$	-	5	-	$\mu A$
$V_{STB}$ Terminal Current	$I_{STB}$		-	0.5	-	$\mu A$
$-V_{GG}, -V_{CONT}$ Rise Time*2	TRDD	0.01 $\mu F$ Load Capacitance	-	-	400	$\mu SEC$
$-V_{GG}, -V_{CONT}$ Fall Time*2	$T_{STB}$		-	-	20	mSEC
$+V_{GG}$ Terminal Input Resistance	R1		300	500	700	$k\Omega$
$+V_{CONT}$ Terminal Input Resistance	R2		300	500	700	$k\Omega$
Power Gain	Gain	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$	-	36	-	dB
Gain Flatness	$G_{flat}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$	-	0.5	-	dB
Gain Control Range	$G_{cont}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$ $+V_{CONT}=0.0$ to $2.0V$	-	25	-	dB
Output Power at 1dB Compression point	$P_{-1dB}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$	-	20	-	dBm
Harmonics	$P_{hm}$	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$	-	-40	-	dBc

## ■ ELECTRICAL CHARACTERISTICS 2

( $V_{DD1}=3V$ ,  $V_{STB}=2.7V$ ,  $+V_{CONT}=0V$ ,  $f=1.765GHz$ ,  $Z_s=Z_l=50\Omega$ ,  $T_a=25^\circ C$ )

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Load VSWR tolerance	-	$V_{DD2,3}=3.0V$ , $I_{idle}=130mA$ $P_{out}=21dBm$ , Load VSWR=1:4 All Phase				-


\*1: Total current of  $V_{DD2}$  terminal and  $V_{DD3}$  terminal.

\*2: Timing chart of input terminal voltage is mentioned in the separate sheet of paper.

# NJG1309VB2

## ■TIMING CHART

1) Timing chart of setting and shut of supply voltage and control voltage,  $V_{DD1}$ ,  $+V_{GG}$ , and  $V_{CONT}$ .

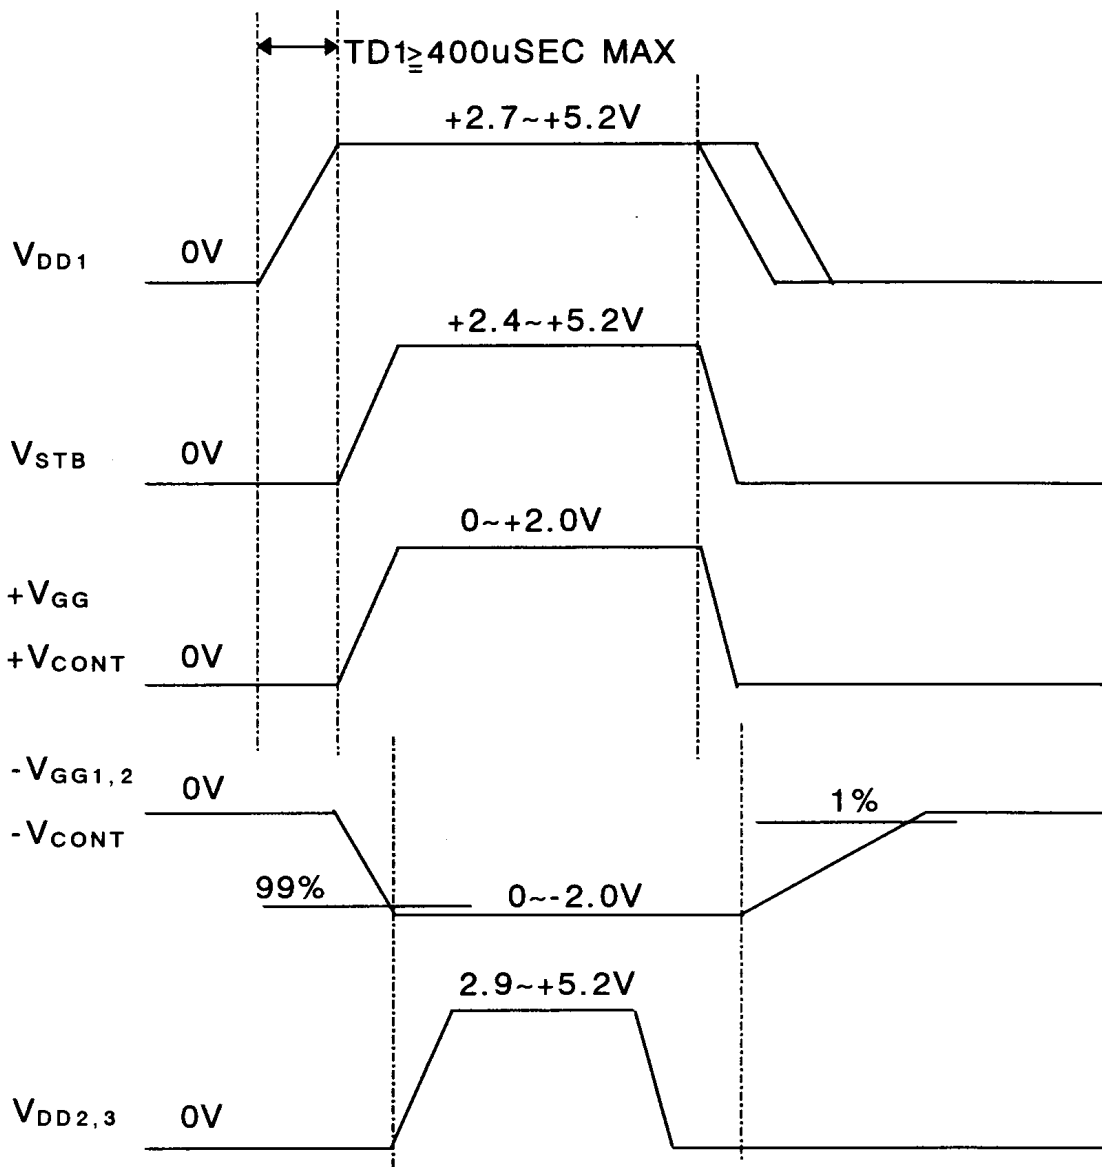


### Notes

- (1) To prevent latch-up,  $V_{DD1}$  should be more than  $V_{STB} + V_{GG}$  and  $+V_{CONT}$ .
- (2) The rising time of  $V_{DD1}$  is 400 $\mu\text{SEC}$ . maximum in case of the recommended circuit.

## ■TIMING CHART

2) Timing chart of burst operation using  $V_{STB}$ .

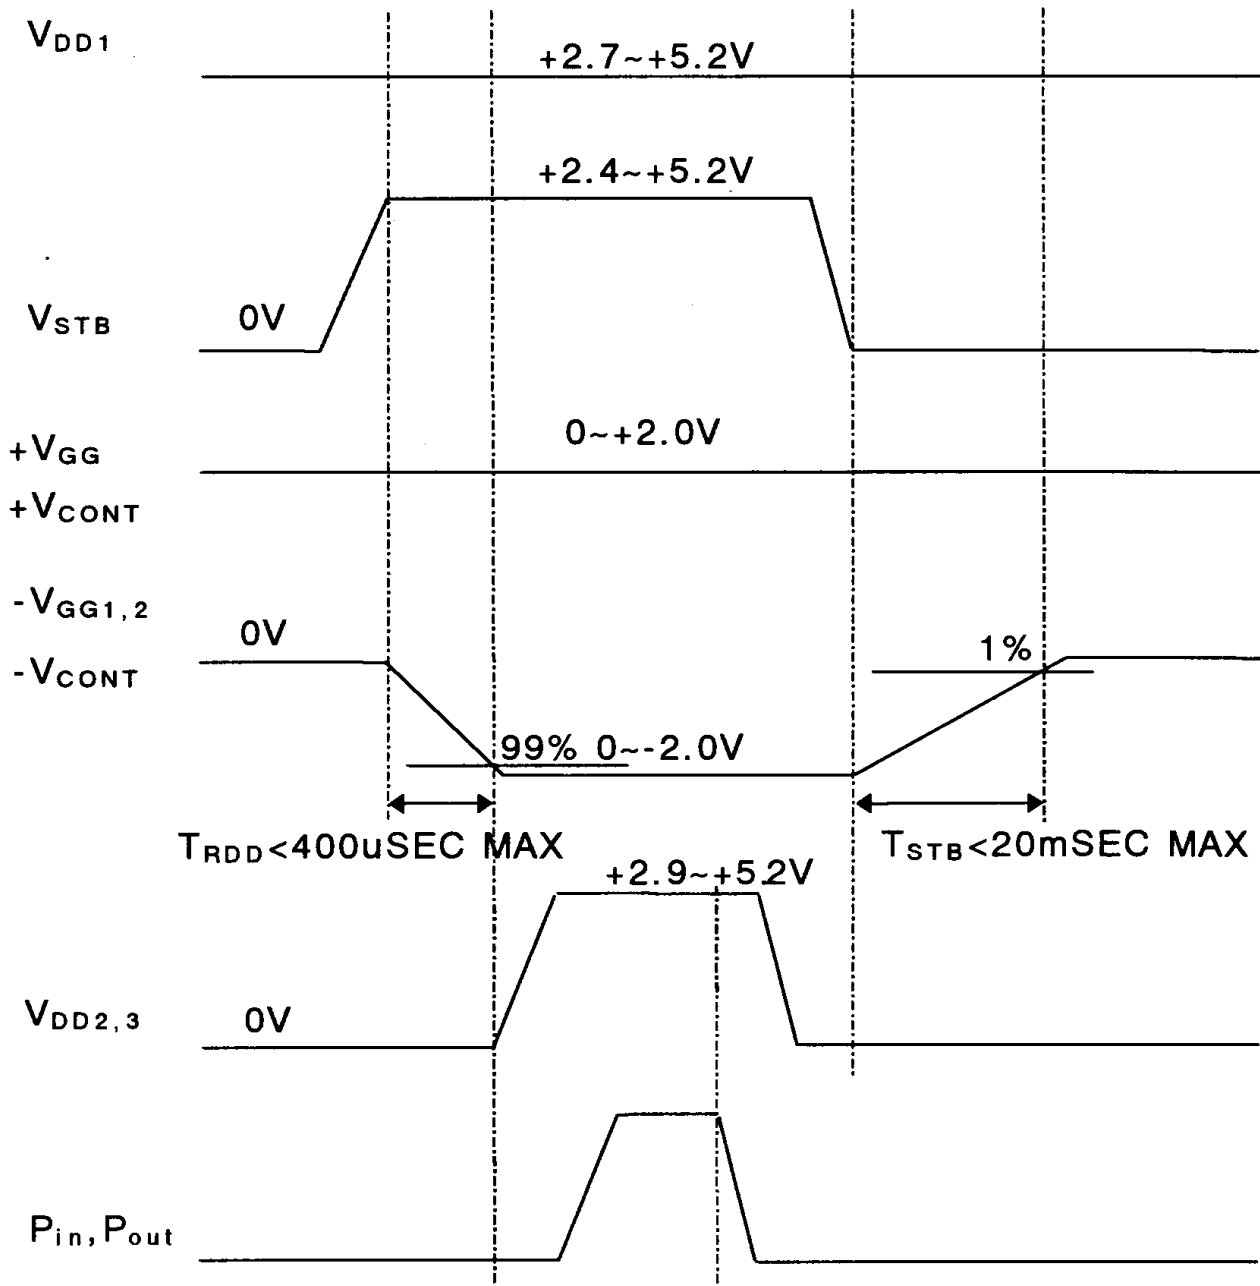

# NJG1309VB2

## ■ TERMINAL INFORMATION


TERMINAL INFORMATION		
PIN No.	SYMBOL	DESCRIPTIONS
1	$V_{STB}$	The output voltage of DC/DC converter is toggled ON/OFF by changing voltage to this terminal to High/Low.
2	$+V_{GG}$	The positive voltage of this terminal is supplied to op-amp 1 in the DC/DC converter, and its output voltage (negative) is internally supplied to the gate ports of #1 to 3 amplifiers. The current of amplifier is controlled by the voltage of this terminal.
3	$-V_{GG1}$	The voltage of the gate ports of #1 to 3 amplifier are supplied through this terminal. Please place a capacitor at this terminal as close as possible.
4	GND	Ground terminal(0V)
5	$RF_{in}$	This terminal is a signal input terminal connected to input port of amplifier through matching circuit and DC blocking capacitor.
6	GND	Ground terminal(0V)
7	GND	Ground terminal(0V)
8	$-V_{GG2}$	This terminal is Connected to gate fourth stage amplifier. Please connect with $-V_{GG2}$ terminal on PCB board and place a bypass possible , since this terminal is NOT connected with op-amp input.
9	GND	Ground terminal(0V)
10	GND	Ground terminal(0V)
11	$RF_{out}$	This terminal is a signal output terminal connected to the output port of amplifier through matching circuit and DC blocking capacitor.
12	GND	Ground terminal(0V)
13	$V_{DD3}$	This terminal is connected to drain port of fourth stage amplifier. Please place a choke inductor and a bypass capacitor shown in the application circuit below.
14	GND	Ground terminal(0V)
15	$V_{DD2}$	The voltage of the gate ports of #1 to 3 amplifier are supplied through this terminal. Please place a capacitor at this terminal as close as possible.
16	GND	Ground terminal(0V)
17	GND	Ground terminal(0V)
18	$-V_{CONT}$	This terminal is a gain control terminal of amplifier, and also internally connected to output port of op-amp2. Please place a bypass capacitor at this terminal shown in the application circuit below as close as possible.
19	$+V_{CONT}$	The positive voltage of this terminal is supplied to op-amp2 in the DC/Dc converter, and its output voltage(negative) is internally supplied to the gain control port of amplifier. The gain of amplifier is controlled by the voltage of this terminal.
20	$V_{DD1}$	This terminal is a voltage supply terminal of DC/DC converter. Please place bypass capacitor shown in the application circuit below as close as possible.

NOTE 1) The ground terminal(4,6,7,9,10,12,14,16,17)shond be directly connected to ground plane To minimize fringing inductance.




## ■ TYPICAL CHARACTERISTICS


Timing Chart 1 (+V<sub>GG</sub>: DC, X-axis: 1msec/div)  
 $V_{DD1}=3V_{dc}$ ,  $+V_{GG}=1V_{dc}$ ,  $+V_{CONT}=0V$   
 $V_{STB}$ :  $V_0-p=3V$ , Period=5msec, Duty=50%

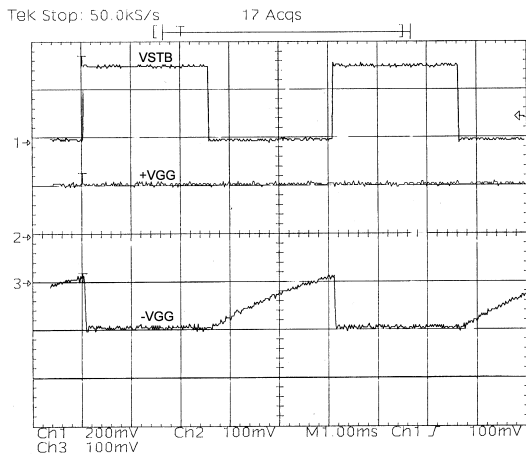


Timing Chart 2 (+V<sub>GG</sub>: DC, X-axis: 100usec/div)  
 $V_{DD1}=3V_{dc}$ ,  $+V_{GG}=1V_{dc}$ ,  $+V_{CONT}=0V$   
 $V_{STB}$ :  $V_0-p=3V$ , Period=5msec, Duty=50%

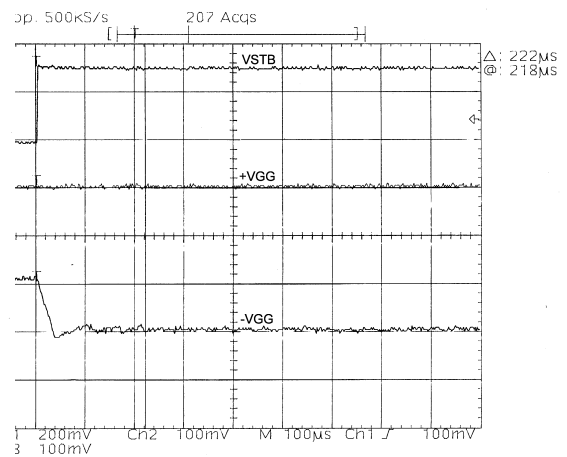

Timing Chart 3 (+V<sub>GG</sub>: Pulse, X-axis: 1msec/div)  
 $V_{DD1}=3V_{dc}$ ,  $+V_{CONT}=0V$   
 $+V_{GG}$ :  $V_0-p=1V$ , Period=5msec, Duty=50%  
 $V_{STB}$ :  $V_0-p=3V$ , Period=5msec, Duty=50%

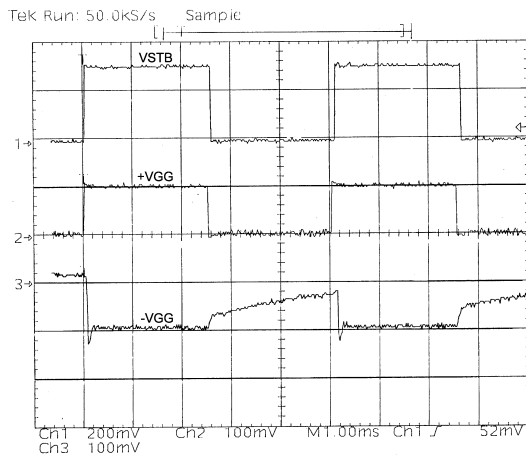

Timing Chart 4 (+V<sub>GG</sub>: Pulse, X-axis: 100usec/div)  
 $V_{DD1}=3V_{dc}$ ,  $+V_{CONT}=0V$   
 $+V_{GG}$ :  $V_0-p=1V$ , Period=5msec, Duty=50%  
 $V_{STB}$ :  $V_0-p=3V$ , Period=5msec, Duty=50%

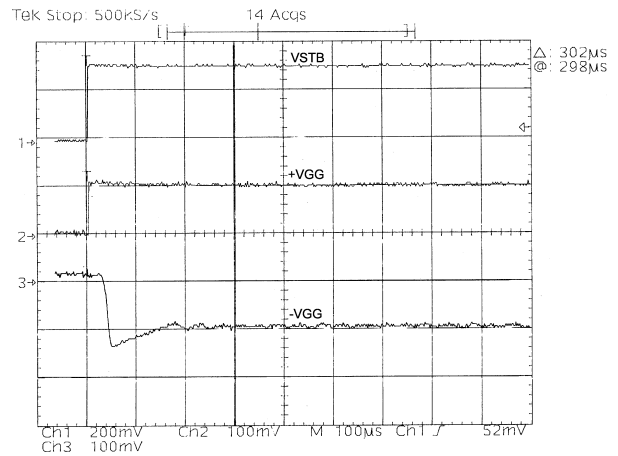


Real vertical voltage scale should be ten times higher than the scale indicated under each graph, because 1:10 probes are used on all of Ch1, Ch2 and Ch3.


# NJG1309VB2

## TYPICAL CHARACTERISTICS


### Small Signal Power Gain vs. Frequency

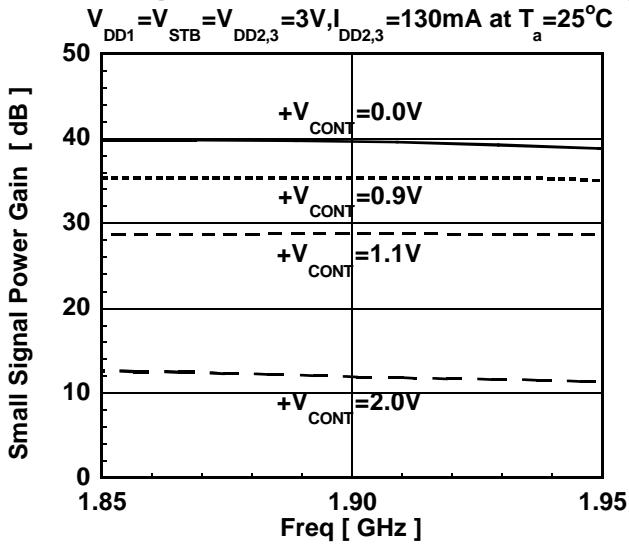


### Small Signal Power Gain vs. Frequency

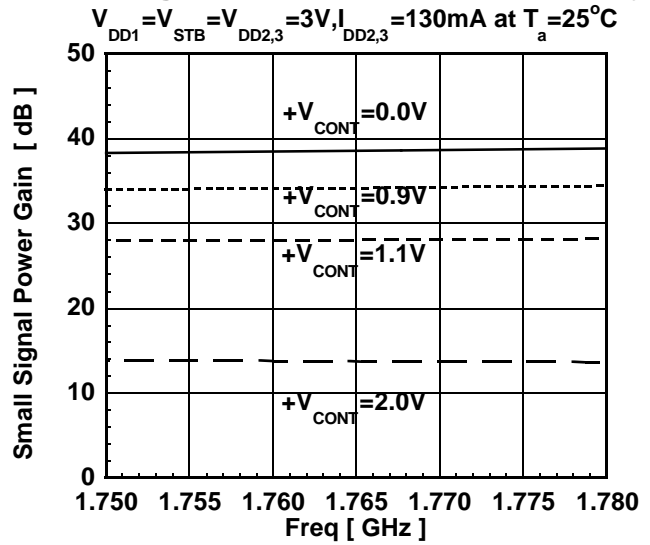


### Small Signal Power Gain vs. Frequency

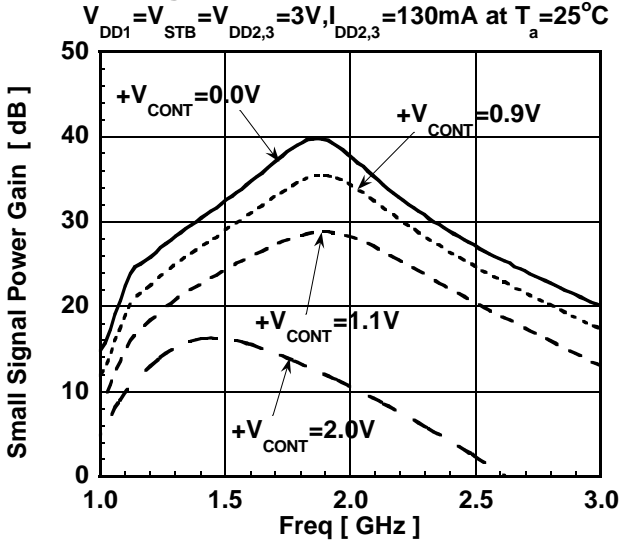


### Small Signal Power Gain vs. Frequency

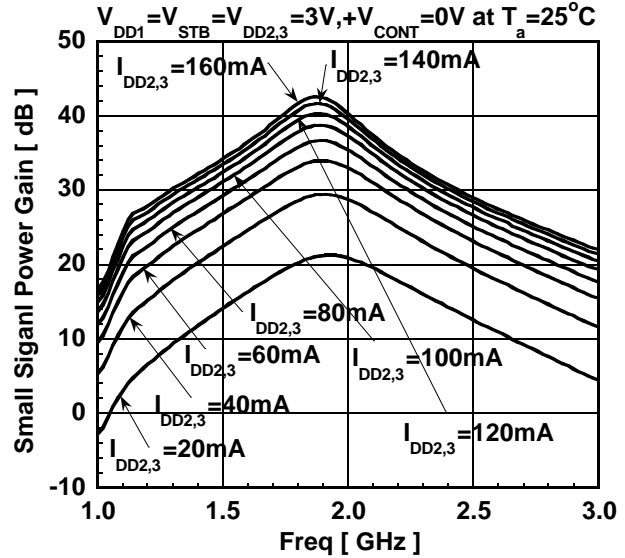

### Input Return Loss vs. Frequency

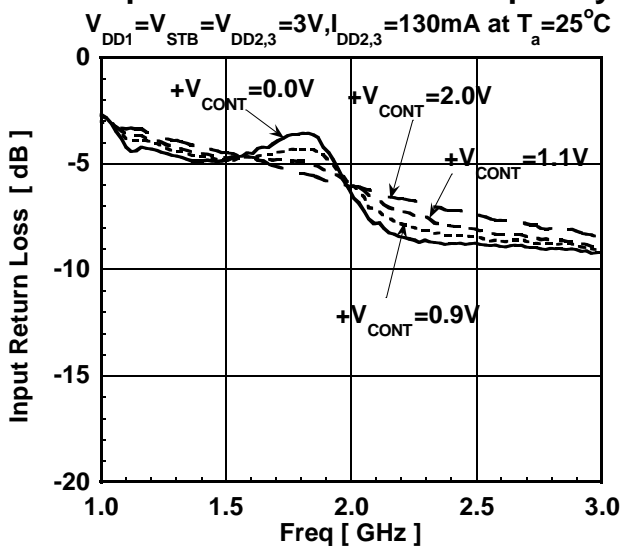


### Output Return Loss vs. Frequency

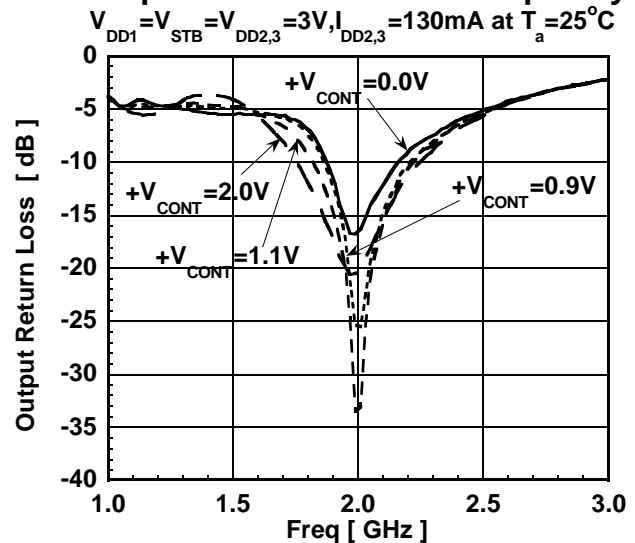

## ■ TYPICAL CHARACTERISTICS


### Output Power, Gain vs. Input Power

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA, f = 1.9GHz$  at  $T_a = 25^\circ C$

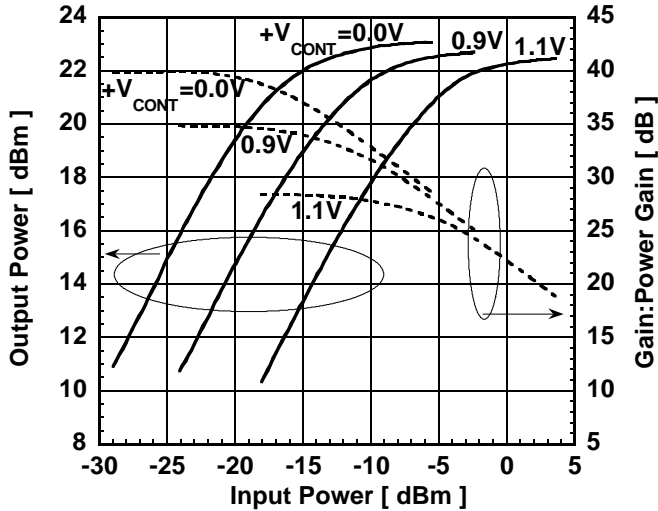


### Output Power, Gain vs. Input Power

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA, f = 1.765GHz$  at  $T_a = 25^\circ C$

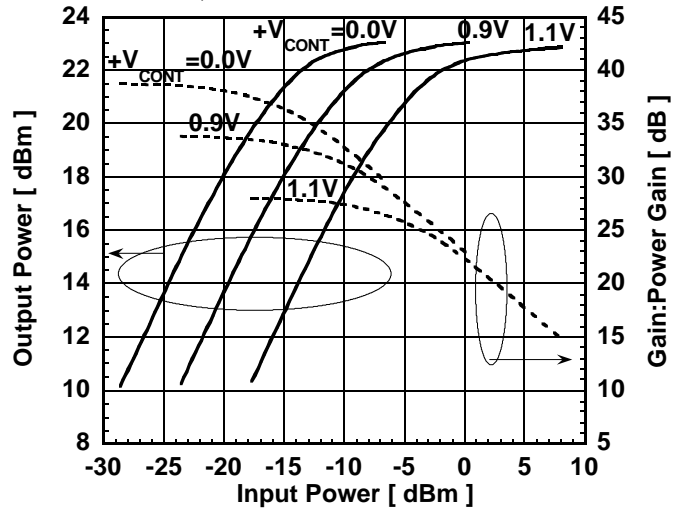


### Output Power, I<sub>DD2,3</sub> vs. Input Power

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA, f = 1.9GHz$  at  $T_a = 25^\circ C$

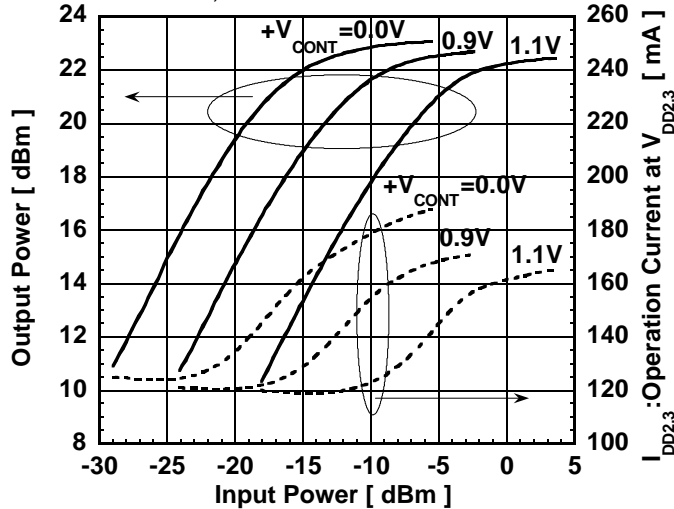


### Output Power, I<sub>DD2,3</sub> vs. Input Power

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA, f = 1.765GHz$  at  $T_a = 25^\circ C$

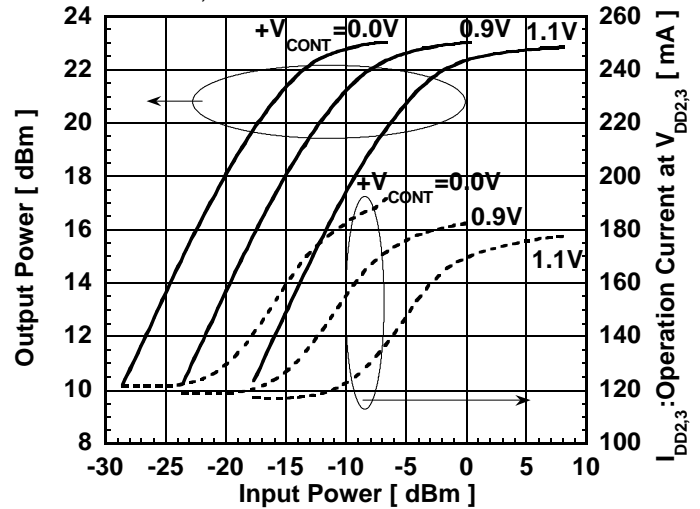


### Output Power, PAE vs. Input Power

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA, f = 1.9GHz$  at  $T_a = 25^\circ C$

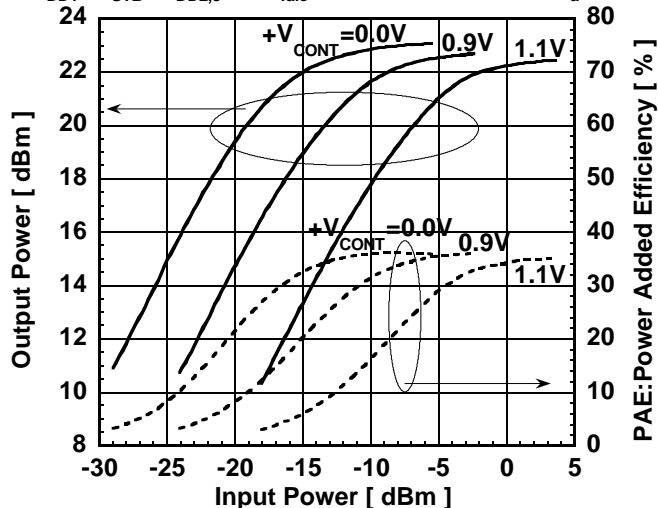

### Output Power, PAE vs. Input Power

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA, f = 1.765GHz$  at  $T_a = 25^\circ C$

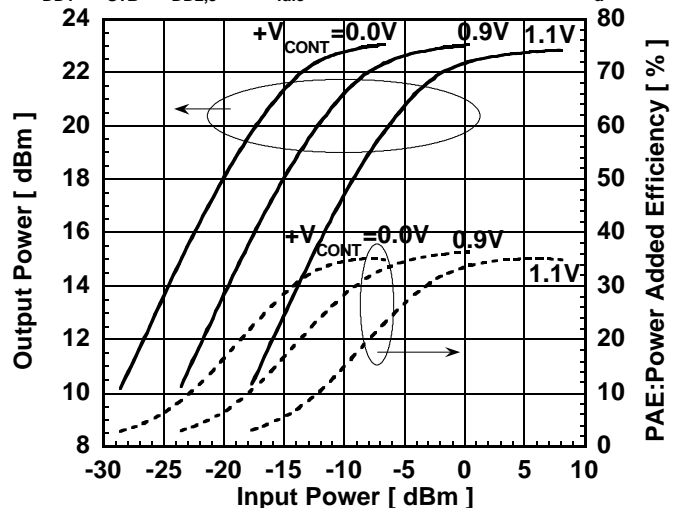


# NJG1309VB2

## TYPICAL CHARACTERISTICS


### Gain, G<sub>CONT</sub> vs. +V<sub>CONT</sub>

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA$   
 $f = 1.9GHz, P_{out} = 21dBm$  at  $T_a = 25^\circ C$

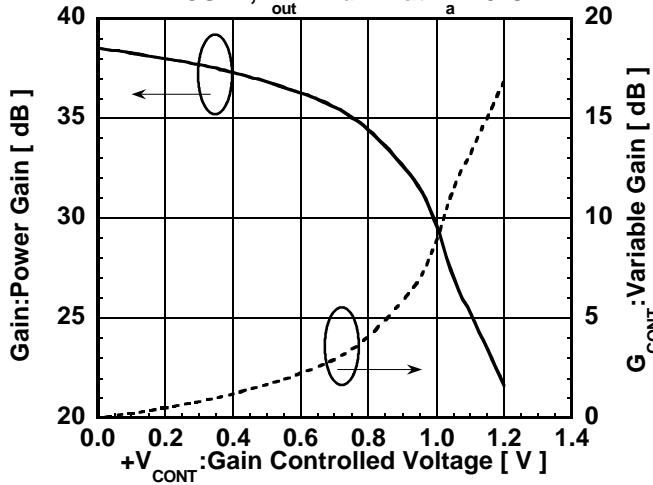


### Gain, G<sub>CONT</sub> vs. +V<sub>CONT</sub>

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, I_{idle} = 130mA$   
 $f = 1.765GHz, P_{out} = 21dBm$  at  $T_a = 25^\circ C$

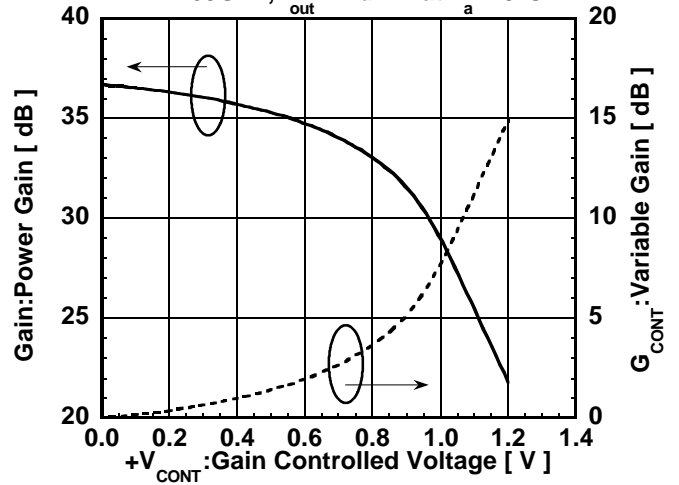


### Gain vs. I<sub>idle</sub>

$V_{DD1} = V_{STB} = V_{DD2,3} = 3.0V, +V_{CONT} = 0V$   
 $f = 1.9GHz, P_{out} = 21dBm$  at  $T_a = 25^\circ C$

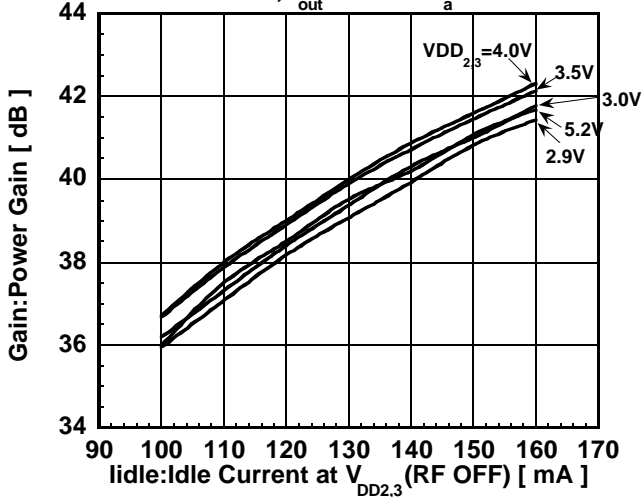


### I<sub>DD2,3</sub> vs. I<sub>idle</sub>

$V_{DD1} = V_{STB} = V_{DD2,3} = 3.0V, +V_{CONT} = 0V$   
 $f = 1.9GHz, P_{out} = 21dBm$  at  $T_a = 25^\circ C$

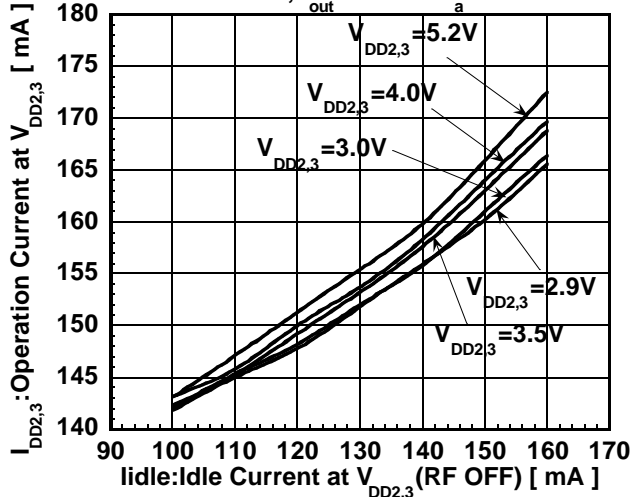


### Gain, I<sub>DD2,3</sub> vs. T<sub>a</sub>

$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, +V_{CONT} = 0V, I_{idle} = 130mA$   
 $f = 1.9GHz, P_{out} = 21dBm$  at  $T_a = 25^\circ C$

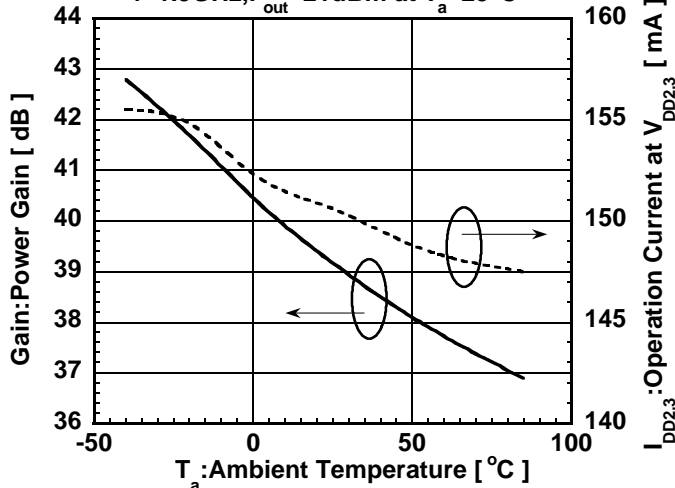

### I<sub>DD1</sub>, I<sub>GG</sub> vs. T<sub>a</sub>


$V_{DD1} = V_{STB} = V_{DD2,3} = 3V, +V_{CONT} = 0V, I_{idle} = 130mA$   
 $f = 1.9GHz, P_{out} = 21dBm$  at  $T_a = 25^\circ C$

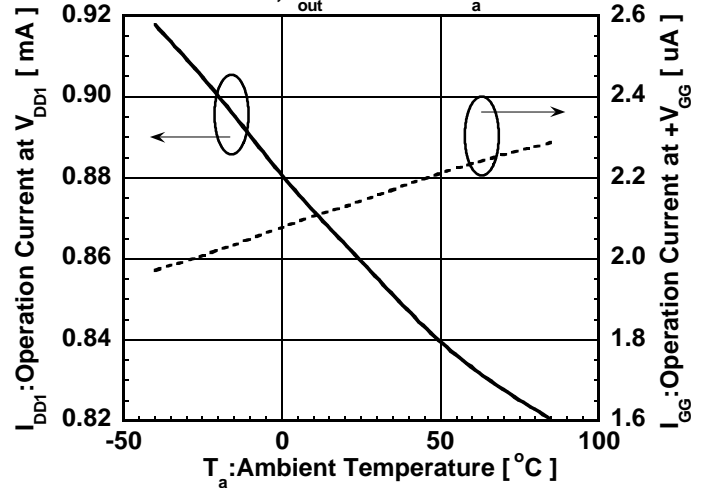

## TYPICAL CHARACTERISTICS


### Harmonics Spectrum

$V_{DD1}=V_{STB}=V_{DD2,3}=3V, I_{idle}=130mA$   
 $+V_{CONT}=0V, freq=1.9GHz, P_{out}=21dB$

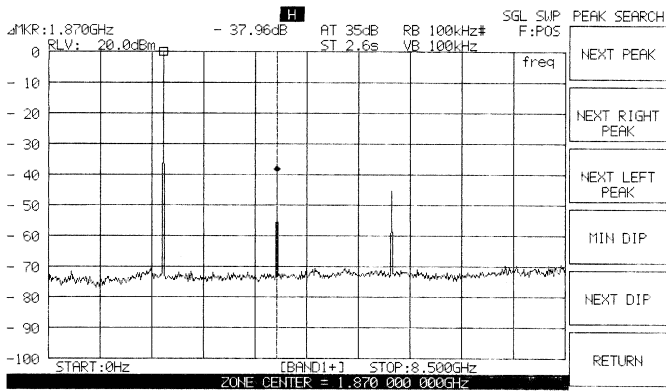

### 1.9GHz Band Spectrum

$V_{DD1}=V_{STB}=V_{DD2,3}=3V, I_{idle}=130mA$   
 $+V_{CONT}=0V, freq=1.9GHz, P_{out}=21dB$

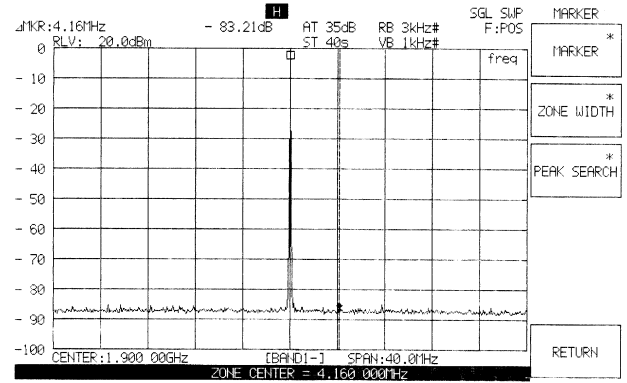

# NJG1309VB2


## ■ TYPICAL CHARACTERISTICS

Scattering Parameters

$V_{DD1}=V_{STB}=V_{DD2,3}=3.0V$ ,  $I_{DD2,3}=130mA$ ,  $+V_{CONT}=0.0$

Freq [ GHz ]	S11		S21		S12		S22	
	MAG [ units ]	ANG [ deg ]	MAG [ units ]	ANG [ deg ]	MAG [ units ]	ANG [ deg ]	MAG [ units ]	ANG [ deg ]
1.00	0.735	-114.9	5.499	157.8	0.002	104.2	0.649	-136.0
1.10	0.618	-125.9	13.129	134.9	0.004	166.8	0.608	-138.6
1.20	0.610	-130.3	19.476	81.7	0.001	133.1	0.589	-151.2
1.30	0.586	-137.9	25.979	42.4	0.002	83.9	0.563	-161.6
1.40	0.572	-144.8	32.912	5.4	0.002	70.2	0.540	-171.2
1.50	0.575	-151.8	41.903	-29.3	0.002	38.5	0.530	178.1
1.60	0.594	-158.7	54.363	-64.9	0.002	107.3	0.535	165.0
1.70	0.636	-169.4	71.512	-103.8	0.003	38.4	0.526	143.8
1.71	0.638	-171.4	73.884	-108.3	0.003	49.1	0.526	141.1
1.72	0.645	-172.3	76.019	-112.4	0.003	24.6	0.512	138.5
1.73	0.645	-173.6	78.109	-116.9	0.003	11.5	0.506	136.1
1.74	0.648	-174.7	80.104	-121.7	0.003	2.1	0.508	133.2
1.75	0.657	-176.9	81.823	-126.1	0.002	52.9	0.502	129.7
1.76	0.656	-178.5	83.884	-130.9	0.002	45.6	0.495	125.9
1.77	0.662	-179.8	85.911	-135.8	0.003	42.1	0.488	122.5
1.78	0.664	178.0	88.234	-140.8	0.002	1.6	0.478	118.3
1.79	0.660	176.9	89.920	-145.9	0.002	51.2	0.463	114.0
1.80	0.667	175.1	91.778	-151.0	0.002	37.5	0.454	110.0
1.81	0.665	172.7	93.288	-155.9	0.003	-1.4	0.439	105.6
1.82	0.663	171.2	94.577	-161.4	0.002	11.6	0.427	101.1
1.83	0.664	168.5	96.237	-167.1	0.003	41.9	0.411	96.1
1.84	0.658	165.9	96.855	-172.6	0.004	52.9	0.389	90.9
1.85	0.658	165.0	97.531	-178.1	0.002	6.8	0.371	85.1
1.86	0.653	162.7	97.939	176.4	0.002	17.5	0.356	79.8
1.87	0.648	160.2	97.817	170.8	0.002	-42.0	0.328	73.5
1.88	0.626	159.8	97.308	165.2	0.004	40.7	0.319	68.7
1.89	0.617	157.2	96.672	159.7	0.002	-1.2	0.287	62.1
1.90	0.609	155.8	95.973	154.2	0.004	34.1	0.272	53.9
1.91	0.595	154.1	94.893	148.7	0.002	47.8	0.248	47.7
1.92	0.583	152.1	93.471	143.4	0.004	33.9	0.223	36.1
1.93	0.572	150.7	91.682	138.2	0.003	-30.6	0.198	31.2
1.94	0.550	149.8	90.112	133.0	0.004	40.4	0.181	16.7
1.95	0.545	148.5	88.018	128.1	0.004	-19.8	0.168	14.1
1.96	0.525	146.4	85.953	123.3	0.002	-68.3	0.161	-3.1
1.97	0.516	146.5	83.721	118.4	0.002	11.5	0.146	-14.2
1.98	0.503	145.3	81.424	113.7	0.002	0.2	0.139	-29.2
1.99	0.490	145.0	79.090	109.3	0.001	-8.6	0.145	-40.3
2.00	0.487	144.2	76.915	105.1	0.000	45.3	0.140	-53.7
2.10	0.401	142.4	57.086	67.2	0.001	-94.1	0.249	-116.5
2.20	0.375	139.2	43.451	37.2	0.002	-15.8	0.355	-143.7
2.30	0.364	135.5	34.273	10.6	0.002	-28.3	0.428	-162.0
2.40	0.364	131.2	27.648	-13.7	0.001	-1.2	0.500	-177.7
2.50	0.366	125.4	22.710	-36.2	0.002	6.3	0.551	169.4
2.60	0.361	118.5	19.114	-57.9	0.002	14.1	0.616	156.0
2.70	0.358	111.5	16.165	-79.1	0.001	-37.1	0.655	144.1
2.80	0.357	104.0	13.822	-99.5	0.004	-32.1	0.710	131.5
2.90	0.353	97.5	11.767	-119.5	0.003	-18.4	0.738	119.6
3.00	0.347	89.8	10.081	-139.0	0.004	3.4	0.778	107.4


## RECOMMENDED CIRCUIT

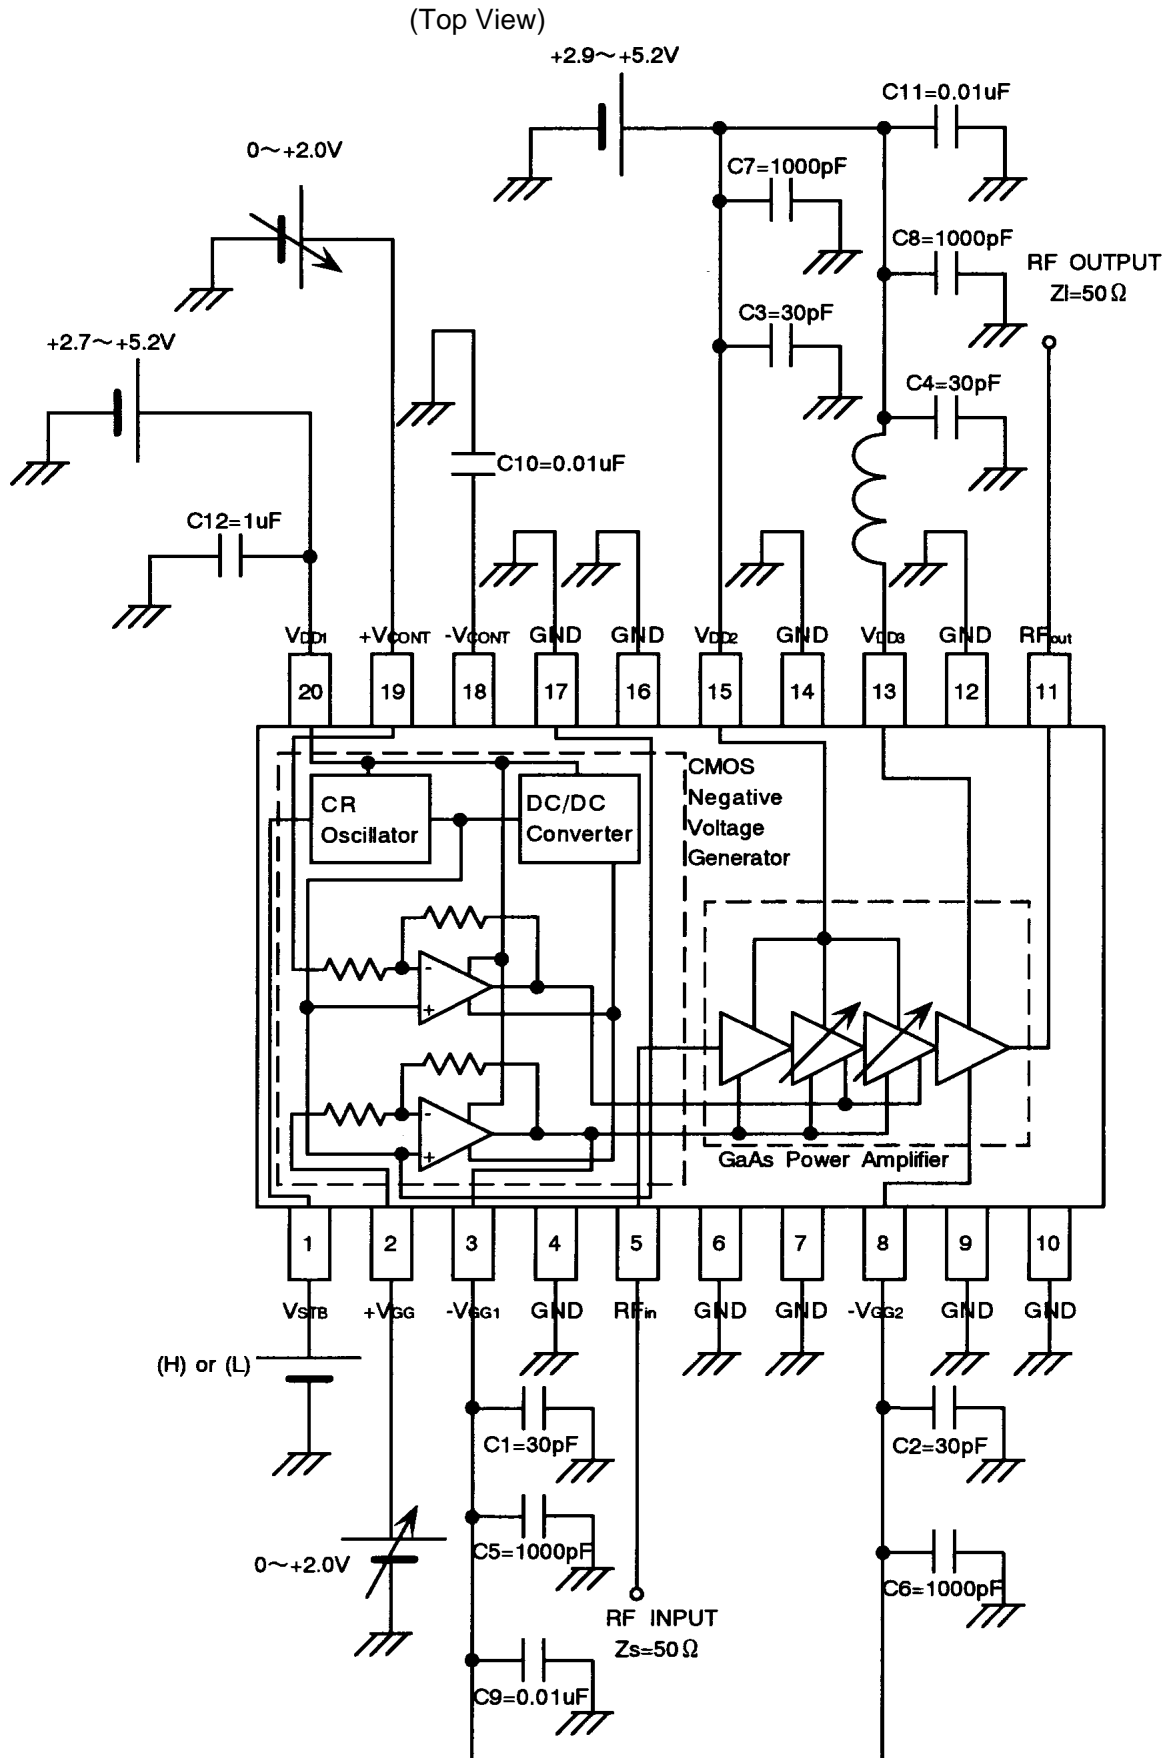

# NJG1309VB2

## RECOMMENDED PCB DESIGN

(Top View)

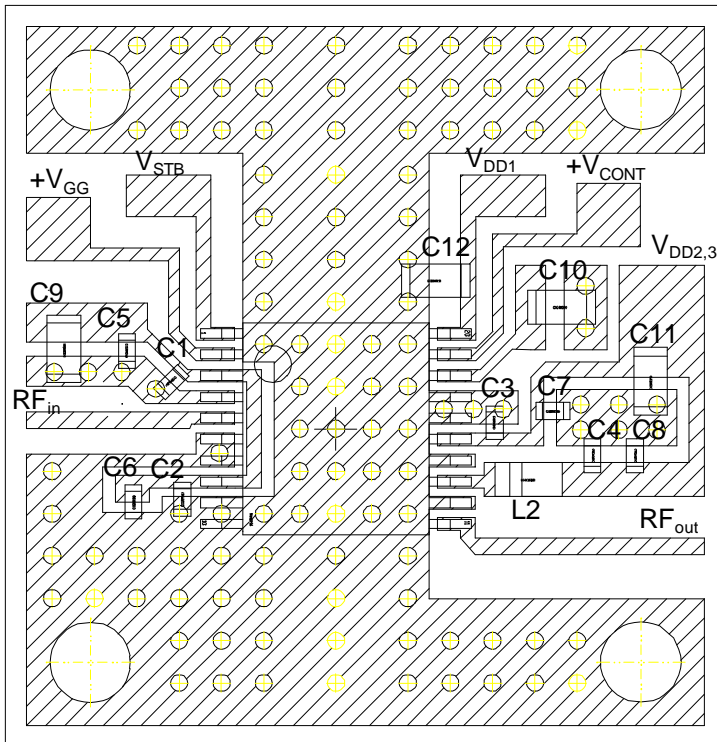

PCB

FR-4

t=0.2mm

PCB Size

17.5mmX17.0mm

Microstrip Line Width

w=0.4mm( $Z_0=50\Omega$ ,

RF<sub>in</sub> and RF<sub>out</sub> port)

### Notes

[1] CMOS IC negative voltage generator has Internal CR oscillator, therefor to reduction of noise, decoupling capacitor(C12) should be connected between the 20pin and the GND.

[2] Chip parts as follows should be connected to the leads of IC as near as possible.


- (1) 3pin - C1
- (2) 8pin - C2
- (3) 13pin - L1
- (4) 15pin - C3

[3] Chip parts list

Parts ID	Constant	Note
C1~C4	30pF	MURATA GRM36 Series
C5~C8	1000pF	MURATA GRM36 Series
C9~C11	0.01uF	MURATA GRM39 Series
C12	1uF	MURATA GRM39 Series
L2	10nH	TAIYO-YUDEN HK1608



## ■PACKAGE OUTLINE (SSOP20-B2)

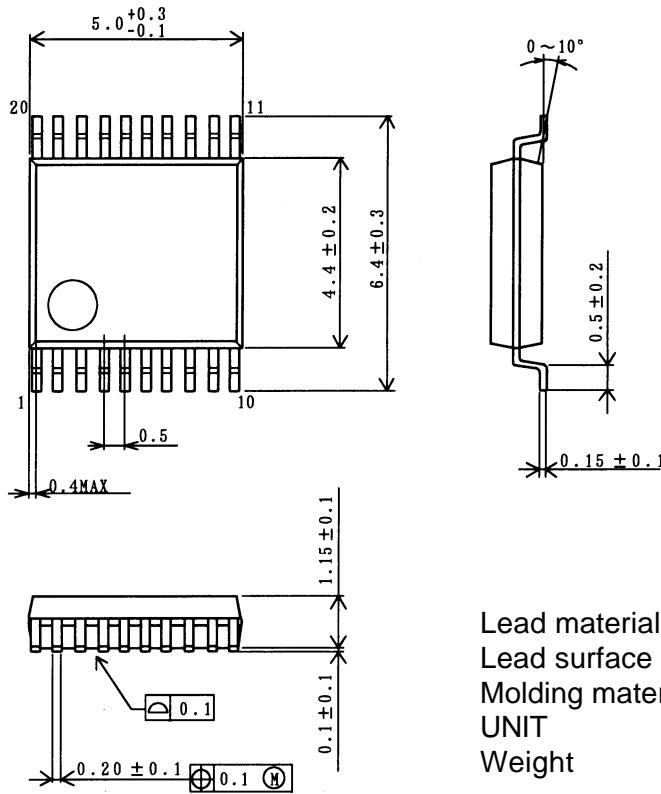

Lead material	: Copper
Lead surface finish	: Solder plating
Molding material	: Epoxy resin
UNIT	: mm
Weight	: 66mg

### Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:[szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382