


(4-4) 紧凑防爆型温度开关 6900TE、6900TUE 系列

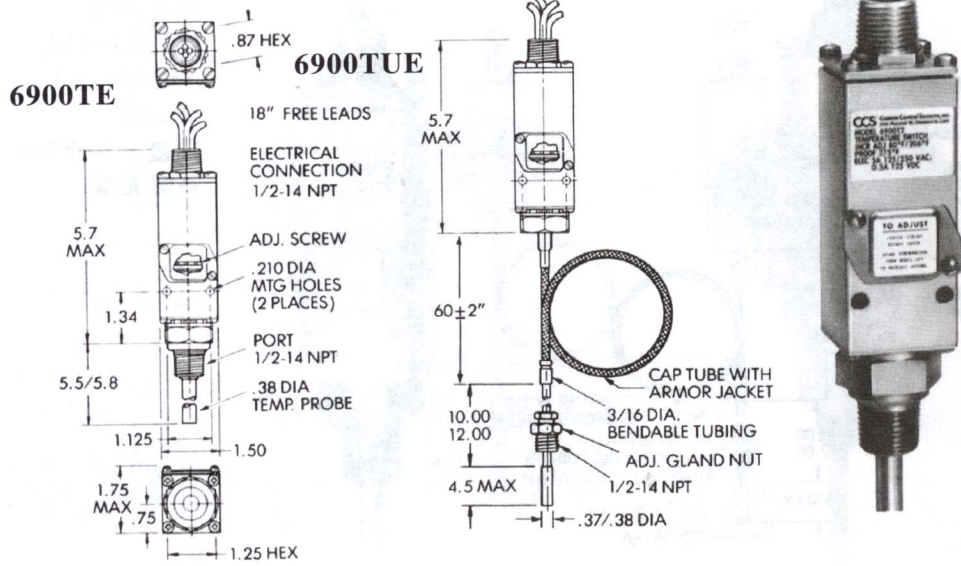

基本特性:
 U.L./CSA
 NEMA: 4,7,9,13
 防爆型
 温度 - 34至71°C
 外部设定

6900TE

最高允许温度 (°C)	设定温度范围 (°C)	型 号	
		SPDT	DPDT
93.33	-6.67~45.00	6900TE12	6900TEM12
148.89	26.67~92.22	6900TE14	6900TEM14
204.44	85.00~153.33	6900TE16	6900TEM16
260.00	137.78~203.33	6900TE18	6900TEM18

6900TUE

93.33	-6.67~45.00	6900TUE12	6900TUEM12
148.89	26.67~92.22	6900TUE14	6900TUEM14
204.44	85.00~153.33	6900TUE16	6900TUEM16
260.00	137.78~203.33	6900TUE18	6900TUEM18
343.33	196.11~290.56	6900TUE20	6900TUEM20
371.11	240.56~337.78	6900TUE22	6900TUEM22

毛细管长度	5'	10'	15'	20'
型号后缀		-7001	-7002	-7003

接点容量

电压	电流	
	SPDT	DPDT "M"
	Res.	Res.
125AC~50/60Hz	15	5
250AC~50/60Hz	15	5
480AC~50/60Hz	15	—
28DC	6	5
125DC	.4	5

