



UV-C Sensor Probe

GUVC-T11GC-4LW11




Features

- Single Supply Voltage, Analog Voltage Output
- Water Environment (10 bar)

Applications

Sterilization Lamp Monitoring

Pure UV-C Monitoring

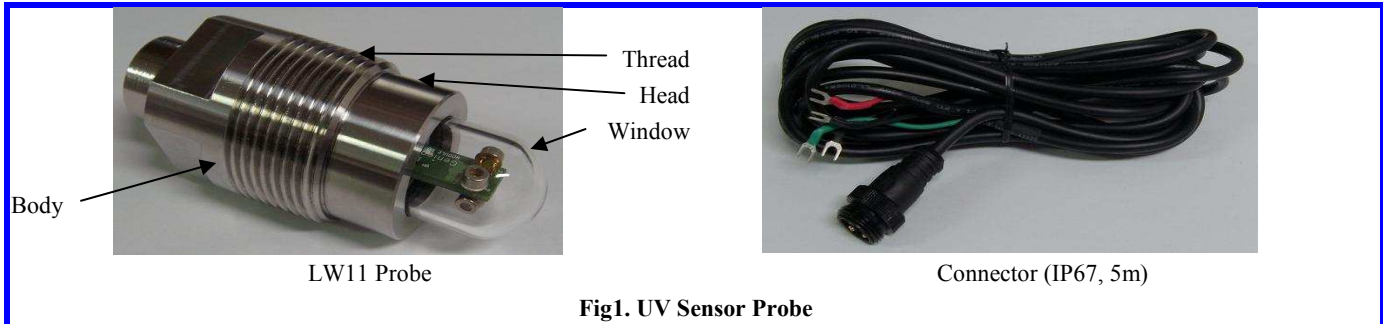

Case dimensions

Thread/Length for Mounting	Body (mm)	Window (mm)	Head (mm)	Wrench Size (mm)	Length (mm)	Weight (kg)	Body (stainless steel)
PT 1 1/4 "/21 mm	Φ42	Φ24×24	Φ36×15	36	81	0.44	316-L (1.4404)

Absolute Maximum Ratings


Parameter	Symbol	Value			Unit	Remark
		Min.	Typ.	Max.		
Storage Temperature	T _{st}	-40		90	°C	
Operating Temperature	T _{op}	-30		85	°C	

Electro-Optical Characteristics (at 25 °C)


Parameter	Symbol	Value			Unit	Remark
		Min.	Typ.	Max.		
Supply Voltage	V _{cc}	9		24	V	DC
Supply Current	I _Q		3.3		mA	
Spectral Detection Range	λ	220		280	nm	10% of Max.
Output Voltage	V _{out}	0		5	V	
Detection Power Range	P	0		100	mW/cm ²	Total power of 4 sensor
Response Time	T		10		ms	

* Maximum of detection power : 20 mW/cm² (Option), 100 mW/cm² (Standard)

Relative Responsivity

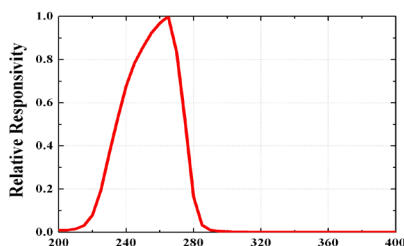

Output Voltage along UV power

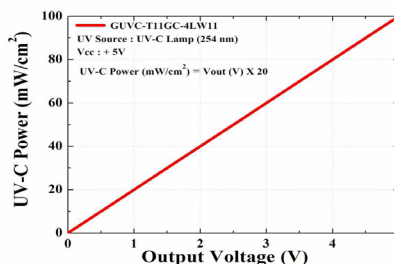

$$\text{UVC Power (mW/cm}^2\text{)} = \text{Vout (V)} \times 20$$