



## **1880 MHz PA Driver with BFG21W**

Application Note  
**JL-9901v0**

Author

**Jarek Lucek**

April 9, 1999

Discrete Semiconductors - Mansfield  
171 Forbes Blvd.  
Mansfield, MA 02048

### **Abstract**

BFG21W, the new 5<sup>th</sup> generation transistor from Philips Semiconductors, is well suited for PA driver applications in AMPS, TDMA, CDMA and GSM systems. BFG21W's performance is superior at 1880 MHz, 3.6V applications. Under CW mode, the part is capable of  $P_{1dB}=24dBm$ , efficiency of over 50% and typical  $G_p$  of 12 dB. BFG21W delivers 23.5 dBm of linear output power under TDMA with a typical  $G_p$  of 12 dB and efficiency of above 45%. Under CDMA mode, BFG21W delivers 21 dBm of linear output power with a typical  $G_p$  of above 12 dB and efficiency of 40%.



## Philips Semiconductors

### INTRODUCTION

BFG21W is Philips Semiconductors' 5<sup>th</sup> generation silicon bipolar RF wideband transistor in a SOT343R plastic SMD package. The transistor delivers superior performance at frequencies below 3 GHz. It is manufactured according to the *double poly* process and characterized by a high transition frequency ( $f_T > 20$  GHz) at low sub 3 Volt supply voltages. This application notes describes BFG21W performance at 1880 MHz operation under CW, 2 Tone, TDMA and CDMA conditions.

### PERFORMANCE OVERVIEW

The table below summarizes BFG21W's typical performance capabilities under different signal conditions.

System	Vsupply	P1dB or Plinear* dBm		Gain** dB		Efficiency*** %	
		Icq=10mA	Icq=20mA	Icq=10mA	Icq=20mA	Icq=10mA	Icq=20mA
CW	3.0 Volts	22	22	12	12	56	56
	3.6 Volts	24	24	12	12	52	52
2Tone	3.0 Volts	18	18	12.5	12.5	30	30
	3.6 Volts	19.5	19	12.5	13	35	30
TDMA	3.0 Volts	21	21	11.5	12	45	45
	3.6 Volts	23.5	23.5	11.5	12	49	50
CDMA	3.0 Volts	19	19	12.5	12.5	39	40
	3.6 Volts	21	21	12.5	13	42	39

Table 1: BFG21W 1880 MHz PA driver performance summary

- \* - CW - load power @ P1dB  
2Tone - load power represents linear average power @ IMD levels reaching -28dBc.  
TDMA - load power represents linear average power @ ACPR levels reaching -26dBc or ALT levels reaching -45dBc.  
CDMA load power represents linear average power @ ACPR levels reaching -44dBc with 1.25MHz channel offset, 1.25MHz channel bandwidth and 30KHz Adjacent Channel bandwidth
- \*\* - typical Gain at P1dB for CW or Plinear for 2Tone, TDMA, CDMA signals
- \*\*\* - typical Efficiency at P1dB for CW or Plinear for 2Tone, TDMA, CDMA signals.



### CIRCUIT DESCRIPTION

Figure 1 shows a circuit diagram for the 1880 MHz PA driver using the BFG21W. Appendix 1 includes the part list of the demo board.

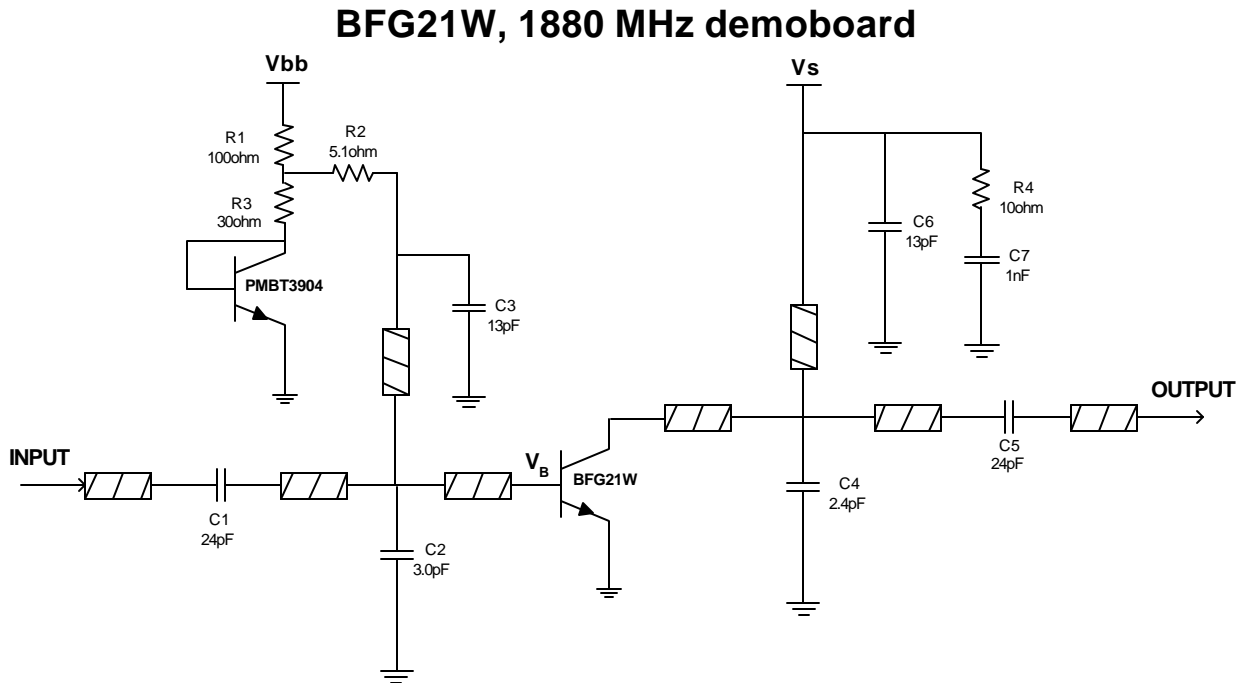


Figure 1: BFG21W common emitter demoboard for class-AB operation at 1880 MHz.



### BOARD LAYOUT

Figure 3 shows the layout of the PCB, which has the following properties:

type: double copper-clad PTFE fiber-glass (backside ground)

$h = 0.64 \text{ mm}$

$t = 35 \mu\text{m}$  (Cu cladding, not coated)

$\epsilon_r = 6.15$

$\tan\delta = 0.0019$

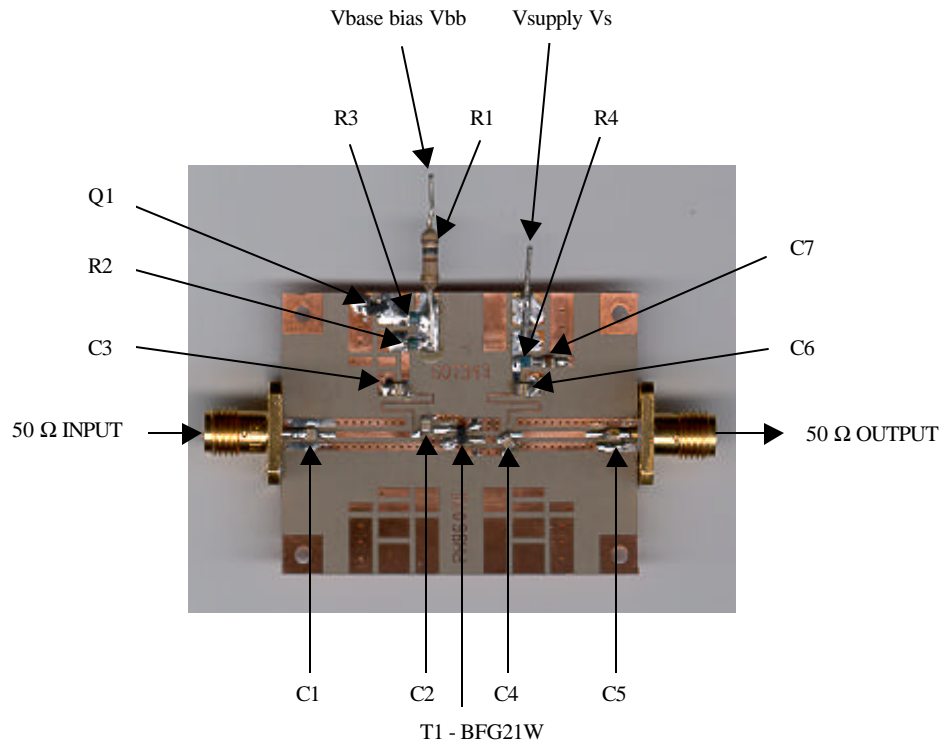


Figure 3: Layout of the 1880 MHz BFG21W PA driver.

Appendix 1 contains the part list for the demo board. The position of C2 and C4 components is critical. The artwork file is available on a floppy disc (DXF or Gerber format). Appendix 2 contains Spice model for BFG21W.



## Philips Semiconductors

### PERFORMANCE

BFG21W was evaluated under 4 different modes of operation. Each mode of operation is summarized below. All measurements were taken with 100% duty cycle signal.

### CW

BFG21W under CW at 1880 MHz and 25 deg. C

Vc=3.6V, Icq=1mA, Vbb=0.9V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	It mA	Eff %
-3.3	5	3.16	8.3	13	6.95
0	10	10.00	10	22	12.99
3.6	15	31.62	11.4	39	23.17
7.88	20	100.00	12.12	70	40.82
9.9	22	158.49	12.1	89	50.88
11.3	23	199.53	11.7	102	55.89
13.2	24	251.19	10.8	120	59.81
15.7	25	316.23	9.3	143	63.18
19	26	398.11	7	182	62.50

Vc=3V, Icq=1mA, Vb=0.9V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	It mA	Eff %
-2.9	5	3.16	7.9	13	8.11
0.4	10	10.00	9.6	22	15.15
4	15	31.62	11	39	27.03
8.4	20	100.00	11.6	70	47.62
11	22	158.49	11	93	56.81
13	23	199.53	10	109	61.02
16.3	24	251.19	7.7	137	61.12
20.3	25	316.23	4.7	180	58.56

Vc=3.6V, Icq=5mA, Vbb=1.04V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	It mA	Eff %
-5.6	5	3.16	10.6	16	5.65
-1.7	10	10.00	11.7	26	10.99
2.6	15	31.62	12.4	43	21.01
7.23	20	100.00	12.77	74	38.61
9.3	22	158.49	12.7	94	48.17
10.7	23	199.53	12.3	107	53.28
12.4	24	251.19	11.6	124	57.88
14.8	25	316.23	10.2	150	60.23
18.3	26	398.11	7.7	188	60.50

Vc=3V, Icq=5mA, Vb=1.05V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	It mA	Eff %
-5.6	5	3.16	10.6	16	6.59
-1.4	10	10.00	11.4	25	13.33
2.9	15	31.62	12.1	42	25.10
7.6	20	100.00	12.4	74	45.05
10.3	22	158.49	11.7	96	55.03
12.2	23	199.53	10.8	114	58.34
15.1	24	251.19	8.9	144	58.15
19.6	25	316.23	5.4	187	56.37

Vc=3.6V, Icq=10mA, Vbb=1.11V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	It mA	Eff %
-7.1	5	3.16	12.1	20	4.52
-2.5	10	10.00	12.5	29	9.85
2.06	15	31.62	12.94	47	19.22
6.92	20	100.00	13.08	77	37.11
9.1	22	158.49	12.9	100	45.28
10.55	23	199.53	12.45	110	51.82
12.2	24	251.19	11.8	127	56.51
14.5	25	316.23	10.5	153	59.05
18.2	26	398.11	7.8	194	58.63

Vc=3V, Icq=10mA, Vb=1.1V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	Ic mA	Eff %
-6.8	5	3.16	11.8	19	5.55
-2.2	10	10.00	12.2	27	12.35
2.4	15	31.62	12.6	44	23.96
7.4	20	100.00	12.6	76	43.86
10	22	158.49	12	99	53.36
12	23	199.53	11	116	57.34
14.8	24	251.19	9.2	146	57.35
19.4	25	316.23	5.6	193	54.62

Vc=3.6V, Icq=20mA, Vbb=1.16V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	It mA	Eff %
-7.9	5	3.16	12.9	28	3.23
-3.1	10	10.00	13.1	33	8.66
1.7	15	31.62	13.3	49	18.44
6.7	20	100.00	13.3	80	35.71
8.9	22	158.49	13.1	98	46.21
10.28	23	199.53	12.72	110	51.82
12.1	24	251.19	11.9	129	55.63
14.4	25	316.23	10.6	156	57.92
17.9	26	398.11	8.1	196	58.03







Vc=3V, Icq=20mA, Vb=1.18V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	It mA	Eff %
-8	5	3.16	13	27	3.90
-3	10	10.00	13	33	10.10
1.9	15	31.62	13.1	49	21.51
7.2	20	100.00	12.8	80	41.67
9.8	22	158.49	12.2	101	52.31
11.8	23	199.53	11.2	119	55.89
14.5	24	251.19	9.5	149	56.19
19.2	25	316.23	5.8	194	54.33

It=Ic+Ib, total current draw.



### CW

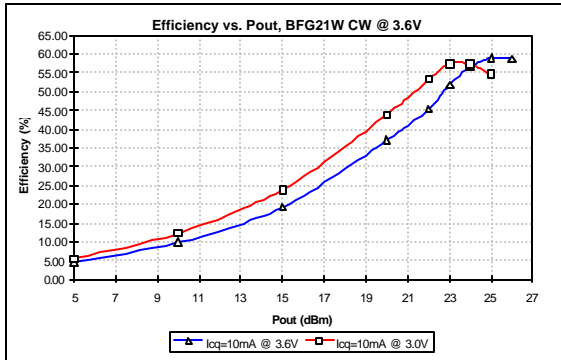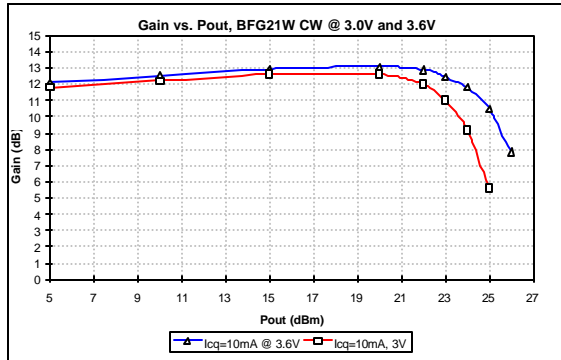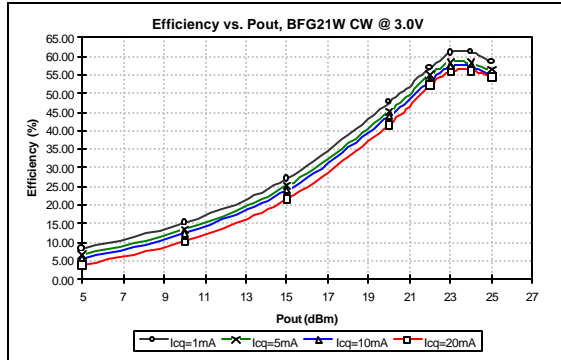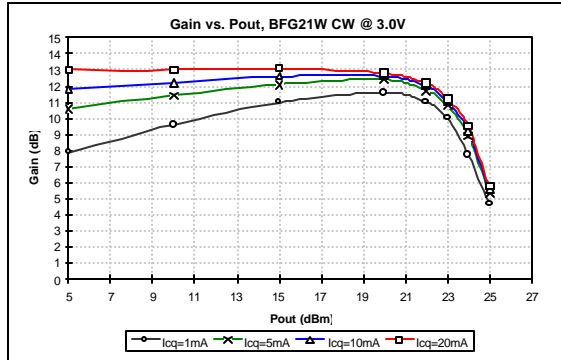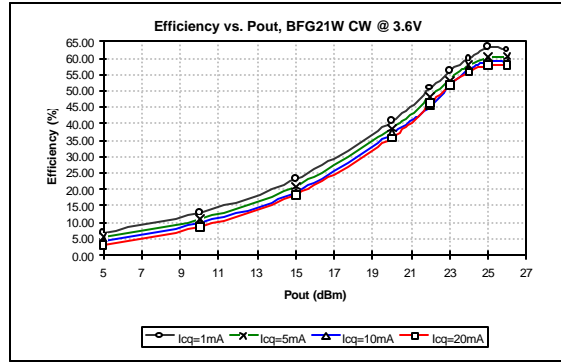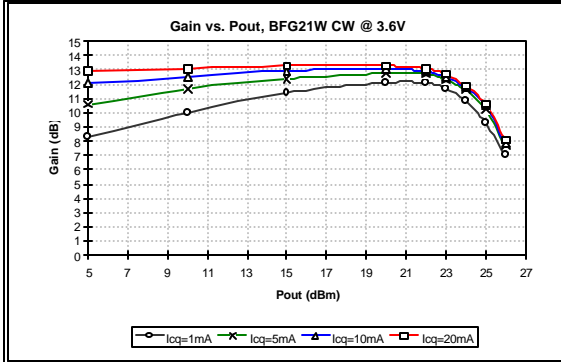



### 2 TONE

BFG21W under 2Tone at 1880 and 1881 MHz and 25 deg. C

Vc=3.6V, Icq=10mA, Vbb=1.1V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	3rd low dBc	3rd high dBc	5th low dBc	5th high dBc	It mA	Eff %
-7.4	5	3.16	12.4	-40	-40	-57	-57	16.3	5.39
-2.8	10	10.00	12.8	-37	-40.8	-52	-63	27	10.29
1.9	15	31.62	13.1	-36	-39	-48	-52	42	20.91
3.9	17	50.12	13.1	-34.7	-37.3	-45	-45	51	27.30
6.1	19	79.43	12.9	-30.7	-32.5	-38	-39	64	34.48
7.23	20	100.00	12.77	-26.5	-27	-34.6	-34.2	71	39.12
8.66	21	125.89	12.34	-22	-22	-27	-28	81	43.17

Vc=3.6V, Icq=20mA, Vbb=1.16V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	3rd low dBc	3rd high dBc	5th low dBc	5th high dBc	It mA	Eff %
-8.3	5	3.16	13.3	-46	-53	-60	-60	27	3.25
-3.4	10	10.00	13.4	-40	-49	-58	-60	34	8.17
1.45	15	31.62	13.55	-35	-58	-50	-51	48	18.30
3.5	17	50.12	13.5	-32	-48	-46	-49	57	24.42
5.8	19	79.43	13.2	-28.9	-35	-41	-43	69	31.98
7	20	100.00	13	-25	-29	-36	-37	76	36.55
8.43	21	125.89	12.57	-21	-23	-29	-32	84	41.63

Vc=3.0V, Icq=10mA, Vbb=1.1V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	3rd low dBc	3rd high dBc	5th low dBc	5th high dBc	It mA	Eff %
-7	5	3.16	12	-38	-39	-56	-55	16	5.65
-2.5	10	10.00	12.5	-36	-37	-51	-54	26	10.99
2.2	15	31.62	12.8	-34	-35	-45	-42	41	22.04
4.3	17	50.12	12.7	-33	-31	-39	-37	51	28.08
6.9	19	79.43	12.1	-24	-23	-29	-29	64	35.46
8.6	20	100.00	11.4	-21	-18	-24	-25	74	38.61
10.8	21	125.89	10.2	-16	-16	-20	-20	90	39.97







Vc=3.0V, Icq=20mA, Vbb=1.17V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	3rd low dBc	3rd high dBc	5th low dBc	5th high dBc	It mA	Eff %
-8.2	5	3.16	13.2	-45	-55	-60	-60	27	3.35
-3.2	10	10.00	13.2	-38	-55	-60	-59	33	8.66
1.7	15	31.62	13.3	-33	-43	-46	-52	47	19.22
4	17	50.12	13	-30.5	-36	-42	-47	56	25.57
6.55	19	79.43	12.45	-24	-25	-33	-35	68	33.38
8.26	20	100.00	11.74	-20	-19	-26	-29	78	36.63
10.44	21	125.89	10.56	-15	-15	-20	-22	93	38.68

It=Ic+Ib, total current draw.



### 2 TONE

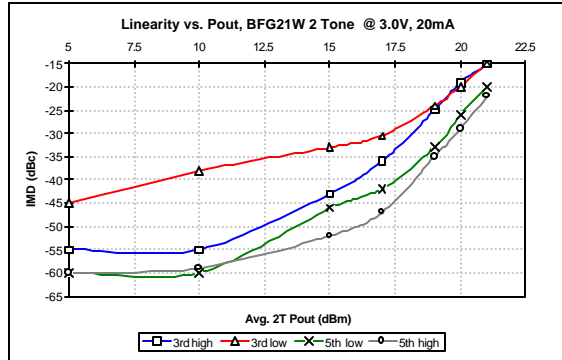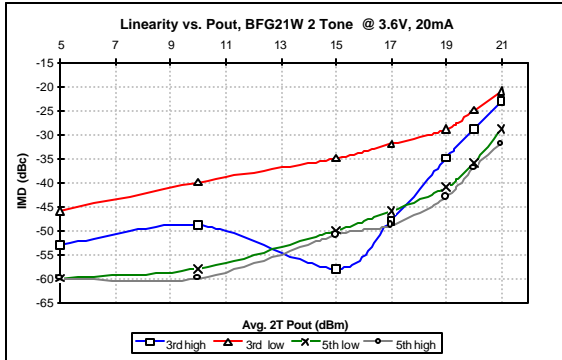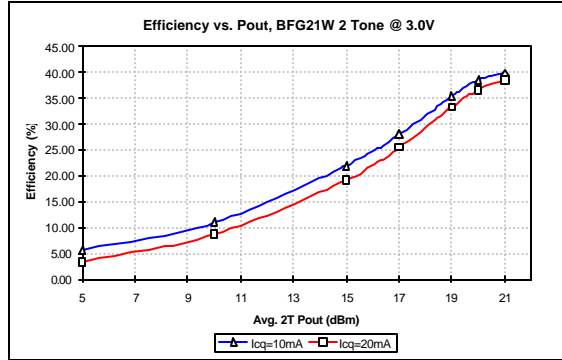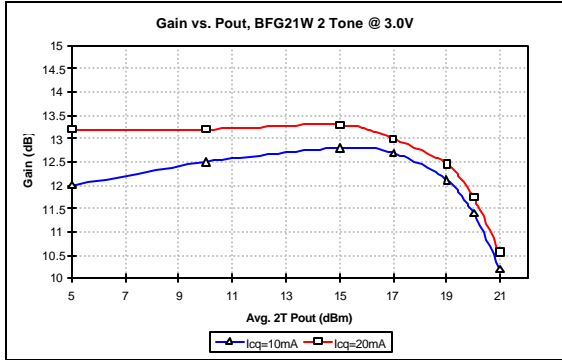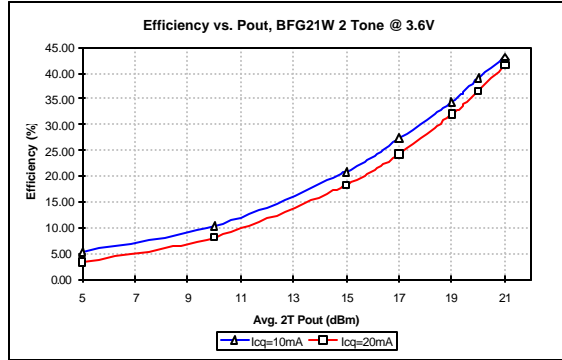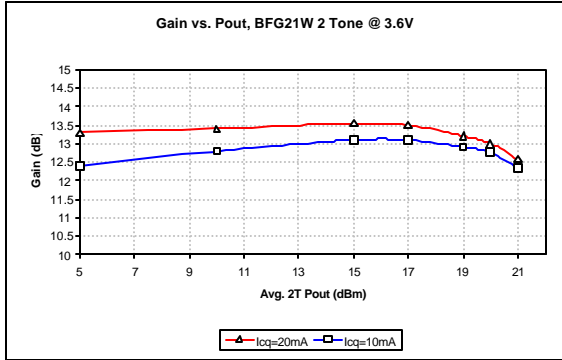





### TDMA

BFG21W under TDMA at 1880 MHz and 25 deg. C

Vc=3.6V, Icq=10mA, Vbb=1.1V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	1st ALT low dB	1st ALT high dB	2nd ALT low dB	2nd ALT high dB	It mA	Eff %
-6.9	5	3.16	11.9	-36	-36	-72	-72	-77	-77	19	4.62
-2.4	10	10.00	12.4	-36	-36	-66	-67	-76	-76	27	10.29
2.6	15	31.62	12.4	-36	-36	-62	-62	-75	-76	43	20.43
7	20	100.00	13	-35	-36	-56	-56	-71	-72	74	37.54
9.4	22	158.49	12.6	-30	-30	-49	-49	-64	-64	95	46.34
11	23	199.53	12	-26.7	-27	-51	-51	-57	-57	110	50.39
12.8	24	251.19	11.2	-24.4	-24	-47	-47	-56	-56	129	54.09
15.3	25	316.23	9.7	-22	-22	-39	-39	-55	-55	154	57.04

Vc=3.6V, Icq=20mA, Vbb=1.16V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	1st ALT low dB	1st ALT high dB	2nd ALT low dB	2nd ALT high dB	It mA	Eff %
-8	5	3.16	13	-36	-36	-74	-74	-78	-78	28	3.14
-3.1	10	10.00	13.1	-36	-36	-72	-72	-77	-77	34	8.17
1.7	15	31.62	13.3	-36	-36	-65	-65	-78	-78	49	17.93
6.7	20	100.00	13.3	-35	-34	-58	-58	-72	-72	78	35.61
9.2	22	158.49	12.8	-29	-29	-50	-50	-62	-62	98	44.92
10.7	23	199.53	12.3	-27	-27	-52	-52	-58	-59	111	49.93
12.6	24	251.19	11.4	-24	-24	-46.8	-46.6	-57	-57	130	53.67
15.1	25	316.23	9.9	-22	-22	-39	-39	-56	-56	160	54.90

Vc=3.0V, Icq=10mA Vbb=1.11V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	1st ALT low dB	1st ALT high dB	2nd ALT low dB	2nd ALT high dB	It mA	Eff %
-6.7	5	3.16	11.7	-36	-36	-72	-73	-78	-78	19	5.55
-2.2	10	10.00	12.2	-35	-35	-66	-66	-75	-76	27	12.35
2.4	15	31.62	12.6	-36	-35	-62	-62	-75	-75	43	24.51
7.6	20	100.00	12.4	-31	-31	-50.1	-50	-68	-69	76	43.86
10.7	22	158.49	11.3	-25.2	-25.4	-49	-49	-56	-56	100	52.83
12.7	23	199.53	10.3	-23.4	-23.2	-43	-43	-56	-56	119	55.89
15.8	24	251.19	8.2	-22	-22	-36	-36	-52	-51	150	55.82
20	25	316.23	5	-20	-20	-32	-32	-42	-42	193	54.62







Vc=3.0V, Icq=20mA Vbb=1.17V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	1st ALT low dB	1st ALT high dB	2nd ALT low dB	2nd ALT high dB	It mA	Eff %
-7.9	5	3.16	12.9	-36	-36	-62	-62	-72	-75	27	3.90
-3	10	10.00	13	-35	-36	-70	-71	-76	-76	34	9.80
1.9	15	31.62	13.1	-36	-34	-64	-64	-77	-77	48	21.96
7.3	20	100.00	12.7	-32	-32	-53	-52	-68	-69	78	42.74
10.4	22	158.49	11.6	-25	-25	-50	-51	-57	-57	102	51.79
12.6	23	199.53	10.4	-22.6	-22	-42	-42	-55.9	-55.8	122	54.52
15.4	24	251.19	8.6	-21	-20.9	-35.6	-35.2	-51	-51	152	55.09
19.9	25	316.23	5.1	-20	-20	-32	-32	-42	-42	197	53.51

It=Ic+Ib, total current draw.



### TDMA

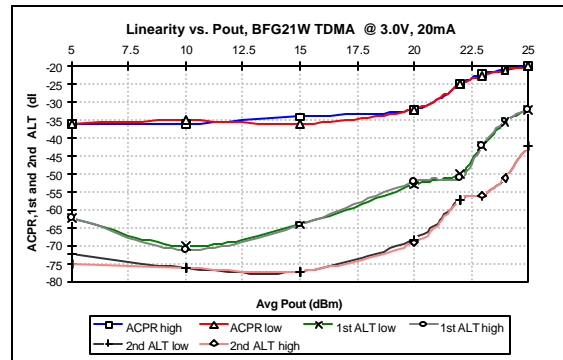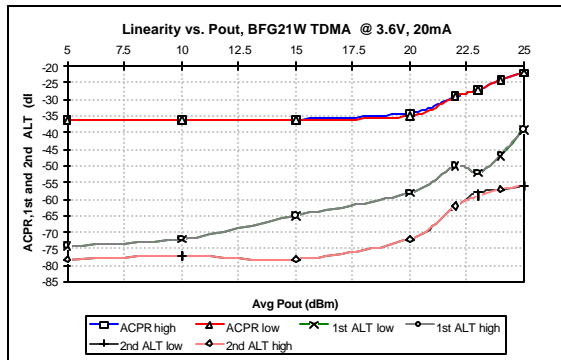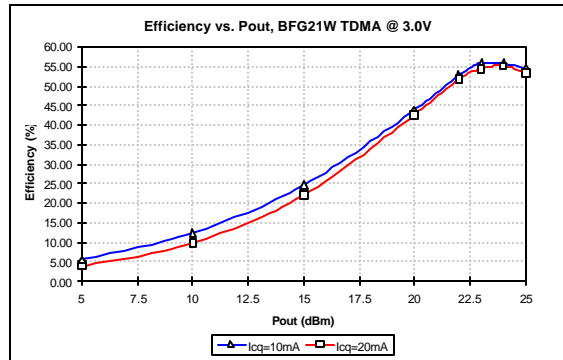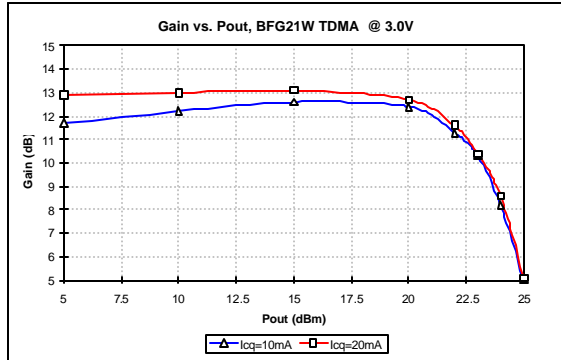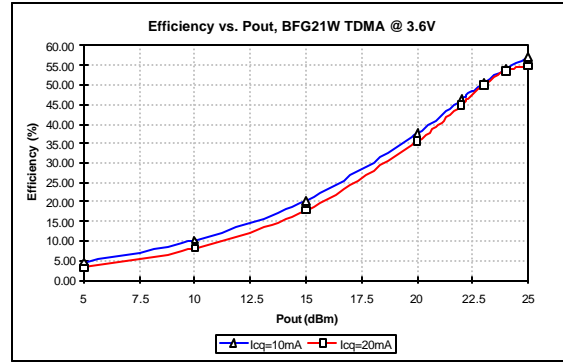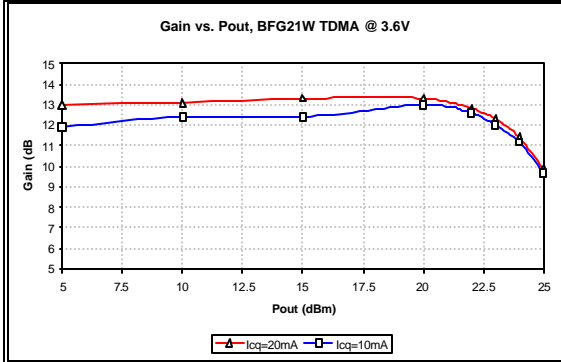



### CDMA

BFG21W under CDMA at 1.88GHz and 25 deg. C

Vc=3.6V, Icq=10mA, Vbb=1.07V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	It mA	Eff %
-6.7	5	3.16	11.7	-58	-58	17	5.17
-2.3	10	10.00	12.3	-57	-58	26	10.68
2.3	15	31.62	12.7	-58	-62	42	20.91
5	18	63.10	13	-56	-58	58	30.22
7.1	20	100.00	12.9	-49	-49	73	38.05
8.23	21	125.89	12.77	-45	-45	82	42.65
9.6	22	158.49	12.4	-41	-42	94	46.83

Vc=3.6V, Icq=20mA, Vbb=1.15V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	It mA	Eff %
-8.2	5	3.16	13.2	-73	-67	27	3.25
-3.4	10	10.00	13.4	-70	-62	33	8.42
1.4	15	31.62	13.6	-73	-57	48	18.30
4.5	18	63.10	13.5	-61	-54	63	27.82
6.7	20	100.00	13.3	-49	-48	78	35.61
7.9	21	125.89	13.1	-45	-45	88	39.74
9.2	22	158.49	12.8	-42	-41	98	44.92

Vc=3.0V, Icq=10mA, Vbb=1.11V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	It mA	Eff %
-6.7	5	3.16	11.7	-62	-65	19	5.55
-2.4	10	10.00	12.4	-59	-59	27	12.35
2.3	15	31.62	12.7	-58	-60	43	24.51
5.3	18	63.10	12.7	-50	-51	59	35.65
7.7	20	100.00	12.3	-43	-43	75	44.44
9.12	21	125.89	11.88	-40	-40	85	49.37
10.9	22	158.49	11.1	-37	-38	101	52.31







Vc=3.0V, Icq=20mA, Vbb=1.17V

Pin dBm	Pout dBm	Pout mWatt	Gain dB	ACPR low dB	ACPR high dB	It mA	Eff %
-8	5	3.16	13	-74	-66	28	3.76
-3.2	10	10.00	13.2	-75	-60	33	10.10
1.77	15	31.62	13.23	-65	-55	48	21.96
4.9	18	63.10	13.1	-51	-50	63	33.38
7.4	20	100.00	12.6	-43	-43	78	42.74
8.85	21	125.89	12.15	-40	-40	89	47.15
10.7	22	158.49	11.3	-37	-38	104	50.80

It=Ic+Ib, total current draw.



### CDMA

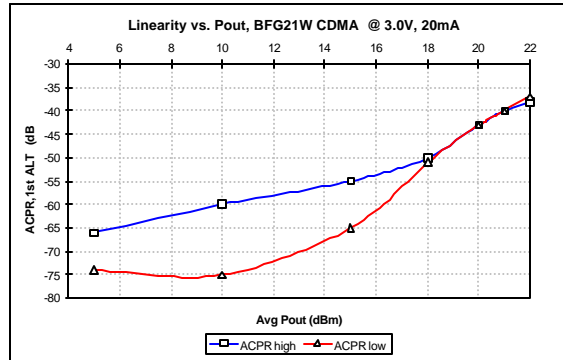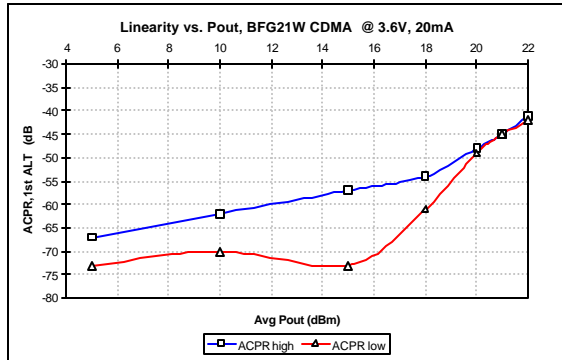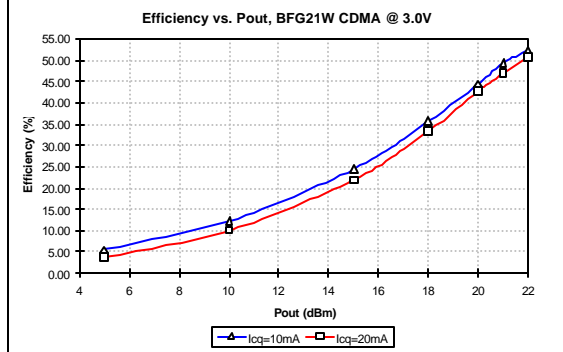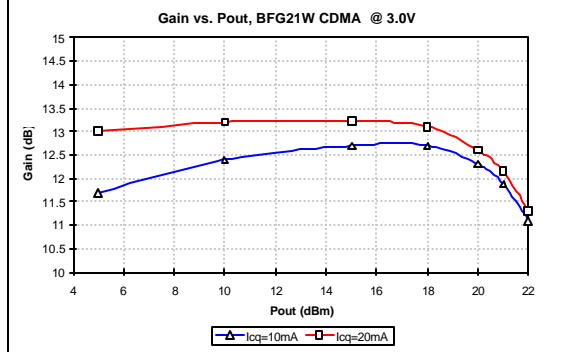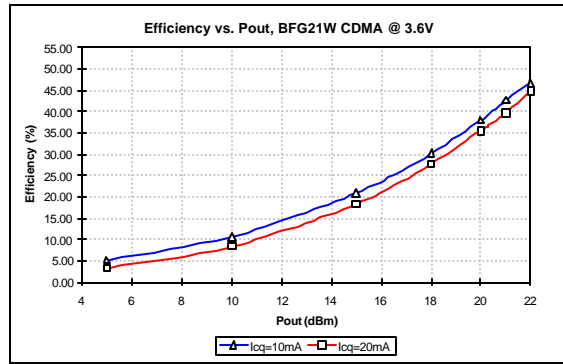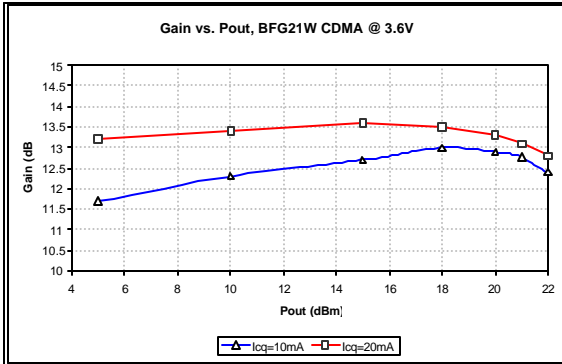



### APPENDIX 1: Part list for BFG21W 1880 MHz PA driver

#### Resistors

R1	100 $\Omega$	Leaded wirewound, 0.1W.
R2	5.1 $\Omega$	Philips 0805, 0.1W metal film resistor.
R3	30 $\Omega$	Philips 0805, 0.1W metal film resistor.
R4	10 $\Omega$	Philips 0805, 0.1W metal film resistor.

#### Capacitors

C1,C5	24 pF	ATC100A, DC blocking capacitor
C2	3.0 pF	ATC100A, matching capacitor
C3,C6	13 pF	ATC100A, bias and supply decoupling capacitor.
C4	2.4 pF	ATC100A, matching capacitor
C7	1.0 nF	ATC100A, supply low frequency decoupling capacitor.

#### Transistors

T1	BFG21W	RF amplifying transistor.
Q1	PMBT3904	Biasing and thermal tracking small signal transistor.



## Philips Semiconductors

### APPENDIX 2:

#### Spice parameters of the BFG21W

```
.SUBCKT BFG21W 10 11 12
Lbbond 2 5 7.209E-10
Lblead 5 8 2.251E-10
Lbfoot 8 11 1.1E-10
Cbfoot 8 12 1.17E-13
Lebond 3 6 5.15E-11
Lelead 6 9 6.914E-11
Lefoot 9 12 1.739E-10
Cefoot 9 12 1.95E-13
Lcbond 1 4 5.711E-10
Lclead 4 7 2.251E-10
Lcfoot 7 10 1.1E-10
Ccfoot 7 12 1.17E-13
Cbc 5 4 2E-15
Cbe 5 6 8E-14
Cce 4 6 8E-14
Cbbp 2 14 3.3E-13
Cbpc 1 13 3.47E-13
Cmet 1 3 1.7E-12
Rsub1 14 15 249.2
Rsub2 13 15 464.4
Rmut 3 15 100
Dio 16 1
+ D1
Rs 15 16 3.5
.MODEL D1 D
+ IS = 4.99E-13
+ N = 1.189

Q1 1 2 3 3 NPN
+ AREA = 1
.MODEL NPN NPN
+ IS = 3.835E-16
+ BF = 92
+ NF = 1
+ VAF = 35
+ IKF = 2.8
+ ISE = 9.005E-13
+ NE = 2.262
+ BR = 8.9
+ NR = 1.009
+ VAR = 2.25
+ IKR = 0.6507
+ ISC = 2.503E-15
+ NC = 1.209
+ RB = 1.492
+ IRB = 0
+ RBM = 0.3202
+ RE = 0.3429
+ RC = 0.8
+ CJE = 3.026E-12
+ VJE = 0.9
+ MJE = 0.2861
+ CJC = 1.041E-12
+ VJC = 0.6964
+ MJC = 0.308
+ CJS = 1.844E-12
+ VJS = 0.4237
+ MJS = 0.2606
+ XCJC = 0.5
+ TR = 1.5E-10
+ TF = 5.05E-12
+ XTF = 74
+ VTF = 0.8
+ ITF = 6.5
+ PTF = 0
+ FC = 0.875
+ EG = 1.11
+ XTI = 4.3
+ XTB = 0.5
.END
```

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:[szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382