

美国 MOTOROLA 压力传感器

美国 MOTOROLA 公司的 MPX 系列硅压力传感器，主要以气压测量为主，适合用于医疗器械，气体压力控制等领域，输出数字信号。其测量方式可分为：表压 (GP)、绝压 (A、AP)、差压 (D、DP) 型。在宽温度范围工作时需外加补偿网络和信号调整电路。具体型号分类而定




名称: MPX2010DP



名称: MPX5700DP MPX5700GP



名称: MPX2100AP

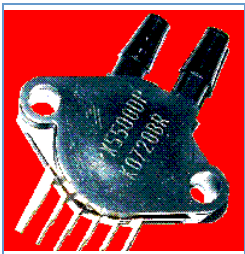

名称: MPX5500DP



名称: MPX5100AP



名称: MPX5050DP



名称: MPX5010DP




名称: MPX4115AP



名称: MPX2200A



名称: MPX2200AP

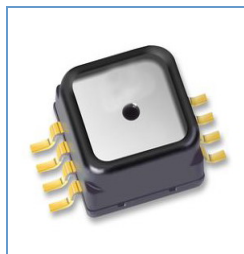

名称: MPXH6115A6U



名称: MPX4250DP



名称: MPX4115A



名称: MPX2202DP




名称: MPX2102AP



名称: MPX2053GP



名称: MPXY8300A6U 压力传感器

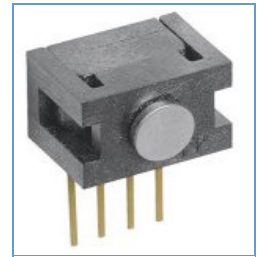

名称: 触力型压力传感器 FSG15N1A



名称: 硅压力传感器 MPXH6115A



名称: MPX5700DP 硅压力传感器



名称: MPX53GP 硅压力传感器



名称: 压力传感器 FPM07




名称: 轮胎压力传感器 TP015




名称: 轮胎压力传感器 NPP301




名称: Freescale 压力传感器 MPX2010DP

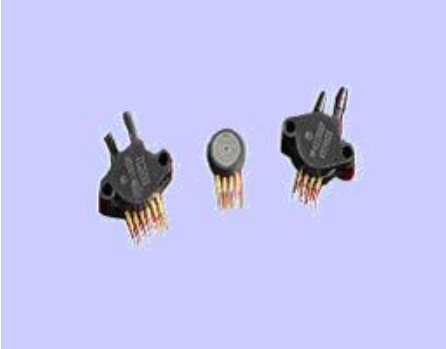

SMALL OUTLINE PACKAGE



MPXV10GC6U
CASE 482A




MPXV10GC7U
CASE 482C


| PIN NUMBER | | | |
|------------|-------------------|---|-----|
| 1 | Gnd | 5 | N/C |
| 2 | +V _{out} | 6 | N/C |
| 3 | V _s | 7 | N/C |
| 4 | -V _{out} | 8 | N/C |

NOTE: Pin 1 is noted by the notch in the lead.

UNIBODY PACKAGE



MPX10D
CASE 344



MPX10DP
CASE 344C

| PIN NUMBER | | | |
|------------|-------------------|---|-------------------|
| 1 | Gnd | 3 | V _e |
| 2 | +V _{out} | 4 | -V _{out} |

NOTE: Pin 1 is noted by the notch in the lead.

商斯达实业传感器与智能控制分公司专门从事各种进口传感器的营销工作，代理多家欧美知名公司的产品。涉及压力、温度、湿度、电流、液位、磁阻、霍尔、流量、称重、光纤、倾角、扭矩、气体、光电、位移、触力、红外、速度、加速度等多种产品。广泛应用于航空航天、医疗器械（如血压计）、工业控制、冶金化工、汽车制造、教育科研等领域。

商斯达实业代理的品牌产品主要有：

压 力: Kulite、ACSI、Honeywell、Entran、Gems、Dwyer、SSI、Smi、Senstronics、Intersema、Motorola、NAIS、E+H、Fujikura、Dytran、APM

称重测力: Transcell、HBM、Interface、Thamesside、Philips、Entran

温 湿 度: Honeywell、Dwyer

流 量: Gems、Dwyer、Honeywell、Folwline、WorldMagnetics

液 位: Honeywell、Siccom、Gems、Dwyer、Kulite、SSI

加 速 度: Entran、Silicondesigns、Dytran

压力开关: ACSI、Gems、Dwyer、台湾矽微

航空器材: TexTech 隔音材料、Honeywell 薄膜加热片、DigirayX 射线探伤仪

仪 表: Honeywell、Transcell、东辉、上润、AD、东崎

商斯达实业 除代理上述产品外，还有几条传感器生产线，一条压力传感器组装线，可为用户提供各种用途的、特殊要求的配套产品。同时还和国内众多同行建立了友好交流的合作关系。商斯达实业地处深圳，信息资源集中，技术力量雄厚，与国内外有着广泛的联系，本着互利互惠、让利与长期合作者的原则，以成为企业“理想的战略伙伴”为己任，深受业界好评。商斯达实业期待着与您开展更友好、更广泛、更深入的合作！

MMA7260Q 是一款三轴 (XYZ-Axis) 向低重力加速度传感器, 提供 1.5g、2g、4g 和 6g 的可选灵敏度。MMA7260Q 能够用于各种多功能应用, 具备感应坠落、倾斜、移动、定位、撞击和震动的功能。它的封装尺寸很小, 只需较小的板卡空间, 另外还提供快速启动和休眠模式, 这些特性使 MMA7260Q 成为采用电池供电的电子产品的理想之选, 包括 PDA、手机、3D 游戏和数码相机等。 更多

重点汽车应用

轮胎压力监控系统 (中文)

轮胎压力监控系统(TPMS) 在线座谈 (中文)

重点产品

加速度 (Low-g) 传感器

MMA7260Q 低重力加速度 (low-g) 传感器 (中文)

MMA6200xxQ 低重力加速度 (low-g) 传感器 (中文)

集成压力传感器

MPXAZ 或 MPXHZ 封装的集成压力传感器特别适用于**汽车应用**

MPXA6115A 高温精确集成压力传感器 (中文)

MPXAZ6115A 媒体耐抗的高温精确集成压力传感器 (中文)

MPXH6115A 高温精确集成压力传感器 (中文)

MP3H6115A 高温精确集成压力传感器 (中文)

MPXHZ6115A 媒体耐抗的高温精确集成压力传感器 (中文)

MPXH6250A 集成压力传感器 (中文)

MPXH6300A 压力传感器 (中文)

MPXH6400A 集成压力传感器 (中文)

美国 motorola/freescale 气压传感器

MPX10D MPX10DP MPX10GP MPX10GS MPXV10GC6U MPXV10GC7U MPX12D MPX12DP MPX12GP MPX2010D MPX2010DP MPX2010GP MPXT2010G7U MPX2050D
MPX2050DP MPX2050GP MPX2050GVP MPX2050GS MPX2050GSX MPX2050GVSX MPX2053D MPX2053DP MPX2053GP MPX2100A MPX2100DP MPX2100AP MPX2100AS
MPX2100ASX MPX2102A MPX2102D MPX2102DP MPX2102AP MPX2102GP MPX2102GVP MPX2200A MPX2200D MPX2200DP MPX2200AP MPX2200GP MPX2200A
MPX2200D MPX2200DP MP2200AP MPX2200GP MPX21002A MPX2102D MPX2102DP MPX2102AP MPX2102GP MPX2102GVP MPX2200A MPX2200D MPX2200DP
MPX2200AP MPX2200GP MPX2201GP MPX2300DT1 MPX4080D MPX4100A MPXA4100A6U MPX4100AP MPXA4100A6U MPX4100AS MPX4101A MPXA4101AC6U
MPX4105A MPX4115A MPXA4115A6U MPX4115AP MPXA4115AC6U MPX4115AS MPX4200A MPX4200AP MPX4200SA MPX4200ASX MPX4250A MPX4250AP MPX4250A6U
MPXA4250A6T1 MPXA4250AC6U MPXA4250AC6T1 MPX4250D MPX4250GP MPX4250DP MPX5010D MPX5010DP MPX5010GP MPX5010GS MPX5010GSX MPXV5010G6U
MPXV5010G7U MPXV5010GC6U/T1 MPXV5010GC7U MPX5050D MPX5050DP MPX5050GP MPX5100A MPX5100D MPX5100DP MPX5100AP MPX5100GP MPX5100GVP
MPX5100AS MPX5100GS MPX5100GVS MPX5100ASX MPX5100GSX MPX5100GVSX MPX53D MPX53GP MPX5500D MPX5500DP MPX5700D MPX5700A MPX5700DP
MPX5700GP MPX5700AP MPX5700GS MPX5700AS MPX5999D MPXA6115A6U MPXA6115AC6U MPXA6115A MPXA6115A6T1 MPXA6115AC6T1 MPXAZ4100A6U
MPXAZ4100A MPXAZ4100A6T1 MPXAZ4100AC6U MPXA4115A6U MPXZ4115A MPXAZ4115A6T1 MPXAX4115AC6U MPXAZ4115AC6T1 MPXC2011DT1
MPXM2010D MPXM2010DT1 MPXM2010GS MPXM2010GST1 MPXM2053D MPXM2053DT1 MPXM2053GS MPXM2053GST1 MPXV4006GC6U MPXV4006G6U MPXV4115V6U
MPXV4115V6T1 MPXV4115VC6U MPXV5004GC6U/T1 MPXV5004G6U/T1 MPXV5004GC7U MPXV5004G7U MPXY8010 MPXY8020 MPXY8030 MPXY8040 MMA6200xxQ

低重力加速度 (low-g) 传感器

MPXA6115A 高温精确集成压力传感器 MPXAZ6115A 耐抗高温压力传感器 MPXH6115A 高温精确集成压力传感器

MP3H6115A 高温精确集成压力传感器 MPXHZ6115A 媒体耐抗的高温精确集成压力传感器 MPXH6250A 集成压力传感器 MPXH6300A 压力传感器

MPXH6400A 集成压力传感器 等汽车用压力传感器

详情请致电我公司或上我公司网站查询

美国 motorola 压力传感器

MPX2010 MPX2100 MPX4080D MPX5050 MPX4105A MPX4200

MPX4250D MPX2050 MPX5999D MPX5100 MPX5010 MPX10

MPX4115A MPX4250A

MPX（毫伏输出）选型指南：（D：差压、A：绝压、P：含包装、MPX7000 系列适合电池供电）

| 型号 | 压力范围 KPa | 满量程输出, mV | | | 灵敏度 mV/psi | 过压 psi, Max | 价格<元> | 详细资料 |
|------------------|----------|-----------|------|------|------------|-------------|-------|------|
| | | Min. | Typ. | Max. | | | | |
| MPX10D/DP | 10 | 20 | 35 | 50 | 3.5 | 75 | | 查看 |
| MPX50D/DP | 50 | 45 | 60 | 90 | 1.2 | 200 | | 查看 |
| MPX100D/DP/A/AP | 100 | 45 | 60 | 90 | 0.6 | 200 | | 查看 |
| MPX200D/DP/A/AP | 200 | 45 | 60 | 90 | 0.3 | 400 | | 查看 |
| MPX700D/DP | 700 | 45 | 60 | 90 | 0.086 | 2800 | | 查看 |
| MPX2010D/DP | 10 | 24 | 25 | 26 | 2.5 | 700 | | 查看 |
| MPX2050D/DP | 50 | 38.5 | 40 | 41.5 | 0.8 | 200 | | 查看 |
| MPX2100D/DP/A/AP | 100 | 38.5 | 40 | 41.5 | 0.4 | 400 | | 查看 |
| MPX2200D/DP/A/AP | 200 | 38.5 | 40 | 41.5 | 0.2 | 400 | | 查看 |
| MPX2700D | 700 | 38.5 | 40 | 41.5 | 0.057 | 2800 | | 查看 |
| MPX7050D/DP | 50 | 38.5 | 40 | 41.5 | 0.8 | 200 | | 查看 |
| MPX7100D/DP/A/AP | 100 | 38.5 | 40 | 41.5 | 0.4 | 400 | | 查看 |
| MPX7200D/DP/A/AP | 200 | 38.5 | 40 | 41.5 | 0.2 | 400 | | 查看 |

MPX（标准输出）选型指南

| | | | | | | | | |
|-------------|--------|------|------|------|-----|------|--|----|
| MPX4100A/AP | 15-102 | 4618 | 4700 | 4782 | 54 | 400 | | 查看 |
| MPX4250A | 20-250 | 4622 | 4690 | 4762 | 20 | 400 | | 查看 |
| MPX5010D/DP | 10 | 4275 | 4500 | 4725 | 450 | 75 | | 查看 |
| MPX5050D/DP | 50 | 4388 | 4500 | 4613 | 90 | 200 | | 查看 |
| MPX5100D/DP | 100 | 4388 | 4500 | 4613 | 45 | 400 | | 查看 |
| MPX5100A/AP | 15-115 | 4388 | 4500 | 4613 | 45 | 400 | | 查看 |
| MPX5500D/DP | 500 | 4388 | 4500 | 4613 | 9.0 | 3500 | | 查看 |
| MPX5700D/DP | 700 | 4388 | 4500 | 4613 | 6.0 | 2800 | | 查看 |
| MPX5999D/DP | 1000 | 4388 | 4500 | 4613 | 5.0 | 2800 | | 查看 |

Freescale 加速度传感器 (low g)

| 型号 | Acceleration(g) | sensing axis | sensitivity(mg/v) | Rolloff frequency(hz) | vdd(v) | zero g output | package |
|----------|-----------------|--------------|-------------------|-----------------------|--------|---------------|------------|
| MMA6260Q | 1.5/1.5 | X-Y | 800/800 | 50 | 3.3 | 1.65 | 16pin QFN |
| MMA6261Q | 1.5/1.5 | X-Y | 800/800 | 300 | 3.3 | 1.65 | 16pin QFN |
| MMA6262Q | 1.5/1.5 | X-Y | 800/800 | 150 | 3.3 | 1.65 | 16pin QFN |
| MMA6263Q | 1.5/1.5 | X-Y | 800/800 | 900 | 3.3 | 1.65 | 16pin QFN |
| MMA2260D | 1.5 | X | 1200 | 50 | 5.0 | 2.5 | 16pin SOIC |
| MMA1260D | 1.5 | Z | 1200 | 50 | 5.0 | 2.5 | 16pin SOIC |
| MMA1270D | 2.5 | Z | 750 | 50 | 5.0 | 2.5 | 16pin SOIC |
| MMA1250D | 5.0 | Z | 400 | 50 | 5.0 | 2.5 | 16pin SOIC |
| MMA1220D | 8.0 | Z | 250 | 250 | 5.0 | 2.5 | 16pin SOIC |
| MMA6231Q | 10/10 | X-Y | 120/120 | 300 | 3.3 | 1.65 | 16pin QFN |
| MMA6233Q | 10/10 | X-Y | 120/120 | 900 | 3.3 | 1.65 | 16pin QFN |

Freescale 加速度传感器 (Medium g)

| 型号 | Acceleration(g) | sensing axis | sensitivity(mg/v) | Rolloff frequency(hz) | vdd(v) | zero g output | package |
|----------|-----------------|--------------|-------------------|-----------------------|--------|---------------|------------|
| MMA3201D | 40/40 | X-Y | 50/50 | 400 | 5.0 | 2.5 | 20pin SOIC |
| MMA2201D | 40 | X | 50 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA2202D | 50 | X | 40 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA3222D | 50/30 | X-Y | 40/66.67 | 400 | 5.0 | 2.5 | 20pin SOIC |
| MMA3204D | 100/30 | X-Y | 20/66.67 | 400 | 5.0 | 2.5 | 20pin SOIC |
| MMA3202D | 100/50 | X-Y | 50/100 | 400 | 5.0 | 2.5 | 20pin SOIC |
| MMA2204D | 100 | X | 20 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA1213D | 50 | Z | 40 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA1210D | 100 | Z | 20 | 400 | 5.0 | 2.5 | 16pin SOIC |

Freescale 加速度传感器 (High g)

| 型号 | Acceleration(g) | sensing axis | sensitivity(mg/v) | Rolloff frequency(hz) | vdd(v) | zero g output | package |
|----------|-----------------|--------------|-------------------|-----------------------|--------|---------------|------------|
| MMA1211D | 150 | Z | 13 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA2301D | 200 | X | 10 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA1212D | 200 | Z | 10 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA2300D | 250 | X | 8.0 | 400 | 5.0 | 2.5 | 16pin SOIC |
| MMA1200D | 250 | Z | 8.0 | 400 | 5.0 | 2.5 | 16pin SOIC |

Freescale 集成压力传感器

| 型号 | 最大压力 | 最大压力 | 最大压力 | 最大压力 | 最大压力 | 过压 (kpa) | 量程 电压 | 灵敏 mV/Kpa | 精度 0~85 (% of VFSS) | 典型压力 | | | |
|-----------|------|------|--------|--------|-------|----------|-------|-----------|------------------------|------|---|---|---|
| | psi | kpa | in H2O | cm H2O | mm Hg | | vdc | | | A | D | G | V |
| MPX4080 | 11.6 | 80 | 321 | 815 | 600 | 400 | 4.3 | 54 | ±3.0 | | • | | |
| MPX4100 | 15.2 | 105 | 422 | 1070 | 788 | 400 | 4.6 | 54 | ±1.8 | • | | | |
| MPX4101 | 14.8 | 102 | 410 | 1040 | 765 | 400 | 4.6 | 54 | ±1.8 | • | | | |
| MPXA6115A | 16.7 | 115 | 462 | 1150 | 863 | 400 | 4.5 | 45.9 | ±1.5 | • | | | |
| MPX4105 | 15.2 | 105 | 422 | 1070 | 788 | 400 | 4.6 | 51 | ±1.8 | • | | | |
| MPX4115 | 16.7 | 115 | 462 | 1174 | 863 | 400 | 4.6 | 46 | ±1.5 | • | | | |
| | 16.7 | 115 | 462 | 1174 | 863 | 400 | 4.0 | 38 | ±1.5 | | | | • |
| MPXH6115A | 16.7 | 115 | 462 | 1150 | 863 | 400 | 4.6 | 45.9 | ±1.5 | • | | | |
| MPX4200 | 29 | 200 | 803 | 2040 | 1500 | 400 | 4.5 | 26 | ±1.5 | • | | | |
| MPX4250 | 36 | 250 | 1000 | 2550 | 1880 | 400 | 4.7 | 20 | ±1.5 | • | | | |
| | 36 | 250 | 1000 | 2550 | 1880 | 400 | 4.7 | 19 | ±1.4 | | • | • | |
| MPXH6250 | 36 | 250 | 1000 | 2550 | 1880 | 400 | 4.7 | 19 | ±1.5 | • | | | |
| MPXV4006 | 0.87 | 6.0 | 24 | 61 | 45 | 10 | 4.6 | 766 | ±5.0 | | • | | • |
| MPXV5004 | 0.57 | 4.0 | 16 | 40 | 29 | 10 | 3.9 | 1000 | ±2.5 | | • | | • |
| MPX5010 | 1.45 | 10 | 40 | 102 | 75 | 75 | 4.5 | 450 | ±5.0 | | • | | • |
| MPX5050 | 7.25 | 50 | 201 | 510 | 375 | 200 | 4.5 | 90 | ±2.5 | | • | • | • |
| MPX5100 | 14.5 | 100 | 401 | 1020 | 750 | 400 | 4.5 | 45 | ±2.5 | | • | • | |
| | 16.7 | 115 | 462 | 1174 | 863 | 400 | 4.5 | 45 | ±2.5 | • | | | |
| MPX5500 | 72.5 | 500 | 2000 | 5100 | 3750 | 2000 | 4.5 | 9.0 | ±2.5 | | • | • | |
| MPX5700 | 102 | 700 | 2810 | 7140 | 5250 | 2800 | 4.5 | 6.0 | ±2.5 | • | • | • | |
| MPX5999 | 150 | 1000 | 4150 | 10546 | 7757 | 4000 | 4.5 | 5.0 | ±2.5 | | • | | |
| MPXh6300 | 44 | 300 | 1200 | 3060 | 2250 | 400 | 4.7 | 16 | ±1.8 | • | | | |
| MPXH6400 | 60 | 400 | 1600 | 4000 | 3000 | 500 | 4.7 | 12 | ±1.5 | • | | | |

Freescale 带补偿压力传感器

| 型号 | 最大压力 | 最大压力 | 最大压力 | 最大压力 | 最大压力 | 过压 (kpa) | 零位偏差 mv | 量程电压 mv | 灵敏 mV/Kpa | 线性%量程 最小 | 线性%量程 最大 | 典型压力 | | | |
|---------|------|------|--------|--------|-------|----------|---------|---------|-----------|----------|----------|------|---|---|---|
| | psi | kpa | in H2O | cm H2O | mm Hg | | | | | | | A | D | G | V |
| MPX2010 | 1.45 | 10 | 40 | 102 | 75 | 75 | ±1.0 | 25 | 2.5 | -1.0 | 1.0 | | • | • | |
| MPX2053 | 7.0 | 50 | 201 | 510 | 375 | 200 | ±1.0 | 40 | 0.8 | -0.6 | 0.4 | | • | | • |
| MPX2102 | 14.5 | 100 | 400 | 1020 | 750 | 200 200 | ±2.0 | 40 | 0.4 | -1.0 | 1.0 | • | • | | • |
| | 14.5 | 100 | 400 | 750 | 750 | | 1.0 | 40 | 0.4 | -0.6 | 0.4 | | | | |

| | | | | | | | | | | | | | | | |
|---------|------|-----|-----|------|------|---------|------|----|-----|------|------|------|---|---|---|
| MPX2202 | 29 | 200 | 800 | 2040 | 1500 | 400 400 | ±1.0 | ± | 40 | 0.2 | -1.0 | 1.0 | • | • | • |
| | 29 | 200 | 800 | | 1500 | | 1.0 | 40 | 0.2 | -0.6 | 0.4 | | | | |
| MPX2050 | 7.0 | 50 | 201 | 510 | 375 | 200 | ±1.0 | | 40 | 0.8 | -0.3 | -0.3 | • | • | • |
| MPX2100 | 14.5 | 100 | 400 | 1020 | 750 | 200 200 | ±2.0 | ± | 40 | 0.4 | -1.0 | -1.0 | • | • | • |
| | 14.5 | 100 | 400 | | 750 | | 1.0 | 40 | 0.4 | -0.3 | -0.3 | | | | |
| MPX2200 | 29 | 200 | 800 | 2040 | 1500 | 400 400 | ±1.0 | ± | 40 | 0.2 | -1.0 | -1.0 | • | • | • |
| | 29 | 200 | 800 | | 1500 | | 1.0 | 40 | 0.2 | -0.3 | -0.3 | | | | |

Freescale 无补偿压力传感器

| 型号 | 最大压力 | 最大压力 | 最大压力 | 最大压力 | 最大压力 | 过压 (kpa) | 零位偏差 mv | 量程电压 mv | 灵敏 mV/Kpa | 线性 % | 线性 % | 典型压力 | | | |
|-------|------|------|--------|--------|-------|----------|---------|---------|-----------|------|------|------|---|---|---|
| | psi | kpa | in h2o | cm h2o | mm Hg | | | | | 量程 小 | 量程 大 | A | D | G | V |
| MPX10 | 1.45 | 10 | 40 | 102 | 75 | 75 | 20 | 35 | 3.5 | -1.0 | 1.0 | | • | • | |
| MPX12 | 1.45 | 10 | 40 | 102 | 75 | 75 | 20 | 55 | 3.5 | -1.0 | 1.0 | | • | • | |
| MPX53 | 7.0 | 50 | 200 | 510 | 375 | 200 | 20 | 60 | 1.2 | -0.6 | 0.4 | | • | • | |

Freescale 胎压监测传感器

| 型号 | 最大压力 | 最大压力 | 最大压力 | 量程输出 | 灵敏 kpa/count | 最大压力精度 | 最大压力精度 | 最大温度精度 | 工作电压 v | 典型压力 | | | | |
|-----------|-------|-------|------|-------|--------------|--------|----------------|--------|---------|--------|---|---|---|---|
| | psi | kpa | BAR | | | -20° C | +25 ° C-+70° C | | | +25° C | A | D | G | V |
| MPXY8020A | 92.4 | 637.5 | 6.4 | 8-BIT | 2.5 | ±15kpa | ±7.5kpa | ±4° C | 2.1-3.6 | | • | | | |
| MPXY8021A | 92.4 | 637.5 | 6.4 | 8-BIT | 2.5 | ±20kpa | ±7.5kpa | ±4° C | 2.1-3.6 | • | | | | |
| MPXY8040A | 130.5 | 900 | 9.0 | 8-BIT | 5.0 | ±25kpa | ±20kpa | ±4° C | 2.1-3.6 | • | | | | |

单位换算

| 单位 | 千帕 | mm Hg | millibars | inchesH2O | PSI |
|-------|---------|--------|-----------|-----------|--------|
| 1 大气压 | 101.325 | 760.00 | 1013.25 | 406.795 | 14.696 |

| | | | | | |
|---------------|----------|----------|----------|----------|-----------|
| 1 千帕 | 1.00000 | 7.50062 | 10.0000 | 4.01475 | 0.145038 |
| 1 mm Hg | 0.133322 | 1.00000 | 1.33322 | 0.535257 | 0.0193368 |
| 1 millibar | 0.100000 | 0.750062 | 1.00000 | 0.401475 | 0.0145038 |
| 1 inch H2o | 0.249081 | 1.86826 | 2.49081 | 1.00000 | 0.0361 |
| 1 PSI | 6.89473 | 51.7148 | 68.9473 | 27.6807 | 1.00000 |
| 1 hectoPascal | 0.100000 | 0.75006 | 1.00000 | 0.401475 | 0.0145038 |
| 1 cm H2O | 0.09806 | 0.7355 | 9.8x10*7 | 0.3937 | 0.014223 |

压力传感器型号解析(MPX2XXXAPXT1)

| M | PX | A | 2 | XXX | A | P | X | T1 |
|----------|----|--|---|------------------------------------|--------------------------------|---|---|---|
| M - 标准品 | 压 | 无 -UNIBODY AH- SSOP A/V- SOP AZ -SMALL OUTLINE MEDIA RESISTANT PACKAGE | 无-无补偿 2-温度补偿校正 3-open | 最大压力 (kpa) mpx2300 (mmHg) | A-绝对压力 G-表压 D-差压 V-真空 | C-AXI XL PORT (SMALL OUTLINE PACKAGE) P-PORTED SINGLE PORT (AP, GP, GVP) DUAL PORT (DP) S-STOVEPIPE PORT (UNIBODY) SX-AXIAL PORT (UNIBODY) | NONE-NO LEADFORM 0-OPEN 1-2 (CONSULT FACTORY) 3-5 OPEN 6-7 SOP ONLY (6=GULL WING/SURFACE MOUNT) (7= 87 DEGREES/DIP) | NONE-TRAYS T1-TAPE AND REEL 1 INDICATES PART ORIENTATION IN TAPE U-RAIL |
| S-定制品 | 力 | C-CHIP HZ-SUPER SMALL OUTLINE MEDIA RESISTANT | 4-温度补偿校正信号 自动校准 | | | | | |
| 感 | 器 | M-M PAK Y-SUPER SMALL OUTLINE PACKAGE (TPM) | 5- 温度补偿校正信号 6-高温 7-CMOS 8-胎压检测 | | | | | |
| P, X-测试品 | | | | | | | | |

SUNSTAR商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有10多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌IC芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）www.SENSOR-IC.COM 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到中国，共同开拓市场。本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。我公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专业从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达军工产品网：<http://www.junpinic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦1602室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS888@hotmail.com

邮编：518033 E-mail: szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场2583号 电话：0755-83665529

技术支持：0755-83394033 13501568376

Integrated Silicon Pressure Sensor On-Chip Signal Conditioned, Temperature Compensated and Calibrated

The MPXV4115V series piezoresistive transducer is a state-of-the-art monolithic silicon pressure sensor designed for a wide range of applications, particularly those employing a microcontroller with A/D inputs. This transducer combines advanced micromachining techniques, thin-film metallization and bipolar processing to provide an accurate, high-level analog output signal that is proportional to the applied pressure/vacuum. The small form factor and high reliability of on-chip integration make the Motorola sensor a logical and economical choice for the automotive system designer. Figure 1 shows a block diagram of the internal circuitry integrated on a pressure sensor chip.

Features

- 1.5 % Maximum error over 0° to 85°C
- Temperature Compensated from -40° + 125°C
- Ideally Suited for Microprocessor or Microcontroller-Based Systems
- Durable Thermoplastic (PPS) Surface Mount Package

Application Examples

- Vacuum Pump Monitoring
- Brake Booster Monitoring


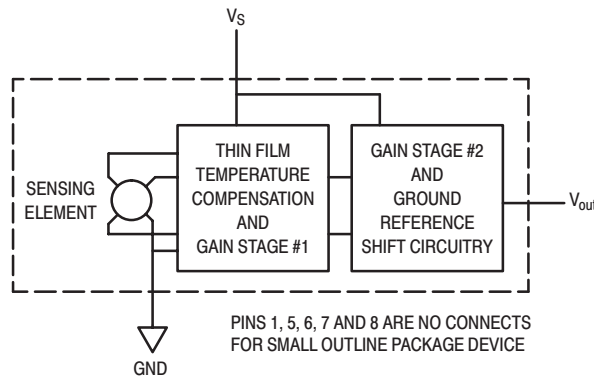


Figure 1. Fully Integrated Pressure Sensor Schematic


MPXV4115V SERIES

**INTEGRATED
PRESSURE SENSOR**
-115 to 0 kPa (-16.7 to 2.2 psi)
0.2 to 4.6 V OUTPUT

SMALL OUTLINE PACKAGE



MPXV4115VC6U
CASE 482A



MPXV4115V6U
CASE 482

PIN NUMBER

| | | | |
|---|------------------|---|-----|
| 1 | N/C | 5 | N/C |
| 2 | V _S | 6 | N/C |
| 3 | Gnd | 7 | N/C |
| 4 | V _{out} | 8 | N/C |

NOTE: Pins 1, 5, 6, 7, and 8 are internal device connections. Do not connect to external circuitry or ground. Pin 1 is noted by the notch in the lead.

MAXIMUM RATINGS(NOTE)

| Parameters | Symbol | Value | Unit |
|-----------------------|-----------|--------------|------|
| Maximum Pressure | P_{max} | 400 | kPa |
| Storage Temperature | T_{stg} | -40 to + 125 | °C |
| Operating Temperature | T_A | -40 to + 125 | °C |

NOTE: Exposure beyond the specified limits may cause permanent damage or degradation to the device.

OPERATING CHARACTERISTICS ($V_S = 5$ Vdc, $T_A = 25^\circ$ C unless otherwise noted. Decoupling circuit shown in Figure 3 required to meet electrical specifications.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|-----------|-------|-------|-------|-------------|
| Pressure Range (Differential mode, Vacuum on metal cap side, Atmospheric pressure on back side) | P_{OP} | -115 | — | 0 | kPa |
| Supply Voltage ⁽¹⁾ | V_S | 4.75 | 5 | 5.25 | Vdc |
| Supply Current | I_o | — | 6.0 | 10 | mAdc |
| Full Scale Output ⁽²⁾ (0 to 85° C) ($P_{diff} = 0$ kPa) ² | V_{FSO} | 4.535 | 4.6 | 4.665 | Vdc |
| Full Scale Span ⁽³⁾ (0 to 85° C) @ $V_S = 5.0$ V | V_{FSS} | — | 4.4 | — | Vdc |
| Accuracy ⁽⁴⁾ (0 to 85° C) | — | — | — | 1.5% | % V_{FSS} |
| Sensitivity | V/P | — | 38.26 | — | mV/kPa |
| Response Time ⁽⁵⁾ | t_R | — | 1.0 | — | ms |
| Output Source Current at Full Scale Output | I_o | — | 0.1 | — | mAdc |
| Warm-Up Time ⁽⁶⁾ | — | — | 20 | — | ms |
| Offset Stability ⁽⁷⁾ | — | — | ±0.5 | — | % V_{FSS} |

NOTES:

- Device is ratiometric within the specified excitation voltage range.
- Full-scale output is defined as the output voltage at the maximum or full-rated pressure.
- Full-scale span is defined as the algebraic difference between the output voltage at full-rated pressure and the output voltage at the minimum-rated pressure.
- Accuracy is the deviation in actual output from nominal output over the entire pressure range and temperature range as a percent of span at 25° C due to all sources of errors, including the following:
 - Linearity: Output deviation from a straight line relationship with pressure over the specified pressure range.
 - Temperature Hysteresis: Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.
 - Pressure Hysteresis: Output deviation at any pressure within the specified range, when this pressure is cycled to and from minimum or maximum rated pressure at 25°C.
 - TcSpan: Output deviation over the temperature range of 0° to 85°C, relative to 25°C.
 - TcOffset: Output deviation with minimum pressure applied, over the temperature range of 0° to 85°C, relative to 25°C.
- Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.
- Warm-up Time is defined as the time required for the product to meet the specified output voltage after the pressure has been stabilized.
- Offset Stability is the product's output deviation when subjected to 1000 cycles of Pulsed Pressure, Temperature Cycling with Bias Test.

ON-CHIP TEMPERATURE COMPENSATION, CALIBRATION AND SIGNAL CONDITIONING

The performance over temperature is achieved by integrating the shear-stress strain gauge, temperature compensation, calibration and signal conditioning circuitry onto a single monolithic chip.

Figure 2 illustrates the gauge configuration in the basic chip carrier (Case 482). A fluorosilicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the silicon diaphragm.

The MPXV4115V series sensor operating characteristics are based on use of dry air as pressure media. Media, other than dry air, may have adverse effects on sensor performance and long-term reliability. Internal reliability and qualification test for dry air, and other media, are available from the factory. Contact the factory for information regarding media tolerance in your application.

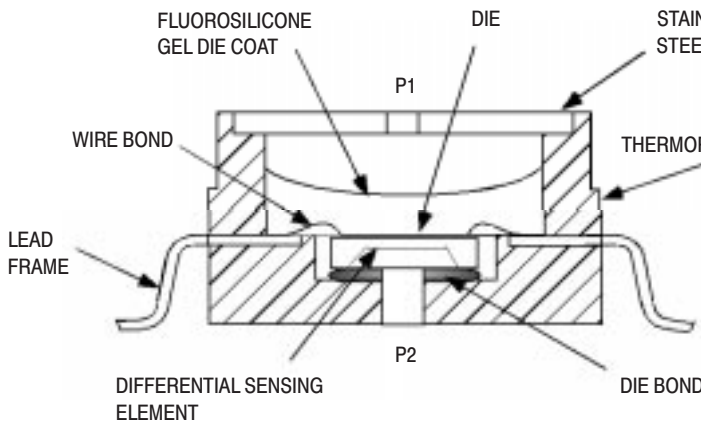


Figure 2. Cross-Sectional Diagram (Not to Scale)

Figure 3 shows the recommended decoupling circuit for interfacing the output of the integrated sensor to the A/D input of a microprocessor or microcontroller. Proper decoupling of the power supply is recommended.

Figure 4 shows the sensor output signal relative to differential pressure input. Typical, minimum and maximum output curves are shown for operation over a temperature range of 0°C to 85°C using the decoupling circuit shown in Figure 3. The output will saturate outside of the specified pressure range.

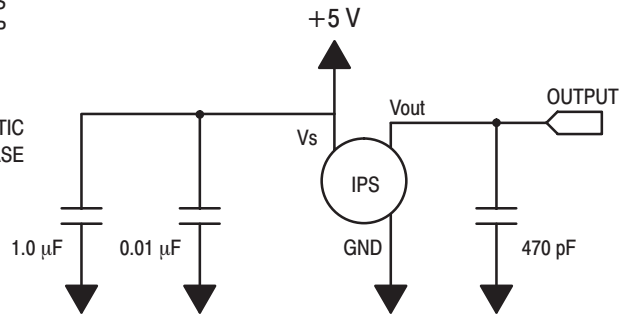


Figure 3. Recommended power supply decoupling and output filtering. For additional output filtering, please refer to Application Note AN1646.

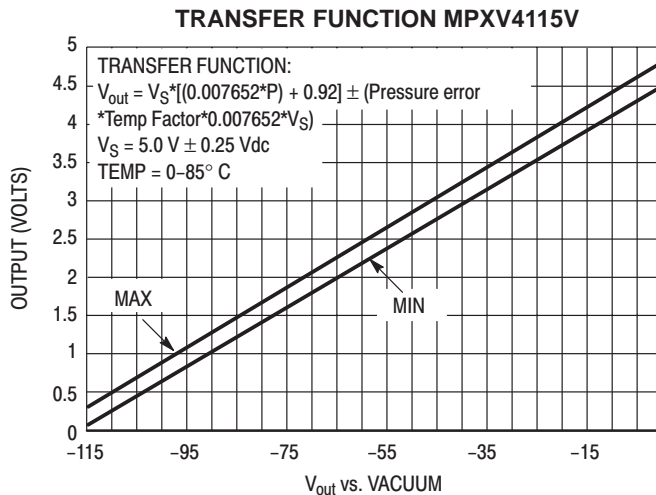


Figure 4. Applied Vacuum in kPa (below atmospheric pressure)

ORDERING INFORMATION

The MPXV4115V series pressure sensors are available in the basic element package or with a pressure port. Two packing options are also offered.

| Device Type | Case No. | Packing Options | Device Marking |
|--------------|----------|-----------------|----------------|
| MPXV4115V6U | 482 | Rails | MPXV4115V |
| MPXV4115V6T1 | 482 | Tape and Reel | MPXV4115V |
| MPXV4115VC6U | 482A | Rails | MPXV4115V |

MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the surface mount packages must be the correct size to ensure proper solder connection interface between the board and the package. With the correct

footprint, the packages will self align when subjected to a solder reflow process. It is always recommended to design boards with a solder mask layer to avoid bridging and shorting between solder pads.


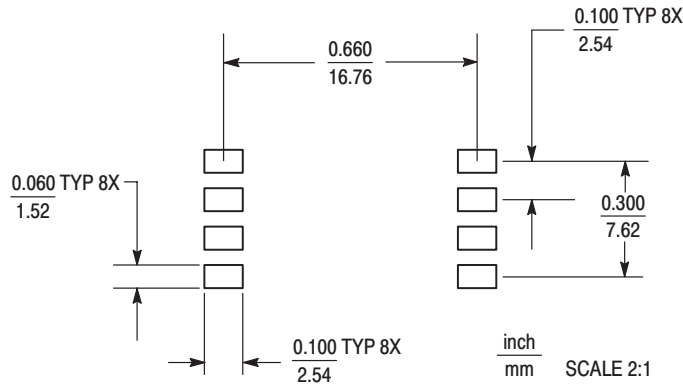


Figure 5. SOP Footprint (Case 482)

Transfer Function


Nominal Transfer Value: $V_{out} = V_S (P \times 0.007652) + 0.92$
 $\pm (\text{Pressure Error} \times \text{Temp. Factor} \times 0.007652 \times V_S)$
 $V_S = 5 \text{ V} \pm 0.25 \text{ Vdc}$

Temperature Error Band

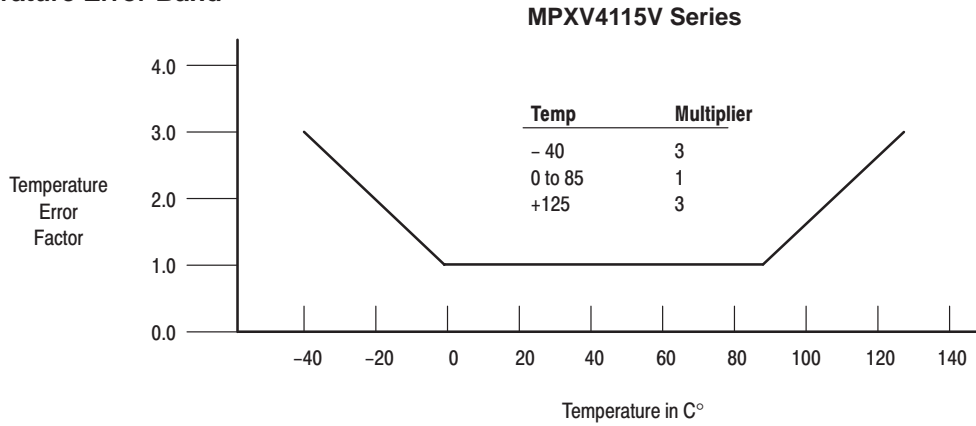

NOTE: The Temperature Multiplier is a linear response from 0° to -40°C and from 85° to 125°C.

Pressure Error Band

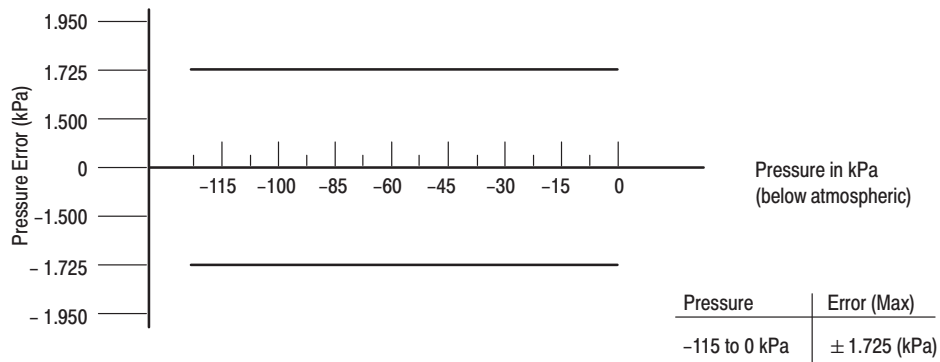

SMALL OUTLINE PACKAGE DIMENSIONS

D 8 PL
 $\oplus 0.25 (0.010) \text{ (M) T B (S) A (S)}$

NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006).
 5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.415 | 0.425 | 10.54 | 10.79 |
| B | 0.415 | 0.425 | 10.54 | 10.79 |
| C | 0.212 | 0.230 | 5.38 | 5.84 |
| D | 0.038 | 0.042 | 0.96 | 1.07 |
| G | 0.100 BSC | | 2.54 BSC | |
| H | 0.002 | 0.010 | 0.05 | 0.25 |
| J | 0.009 | 0.011 | 0.23 | 0.28 |
| K | 0.061 | 0.071 | 1.55 | 1.80 |
| M | 0° | 7° | 0° | 7° |
| N | 0.405 | 0.415 | 10.29 | 10.54 |
| S | 0.709 | 0.725 | 18.01 | 18.41 |


**CASE 482-01
ISSUE O**

D 8 PL
 $\oplus 0.25 (0.010) \text{ (M) T B (S) A (S)}$

NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006).
 5. ALL VERTICAL SURFACES 5° TYPICAL DRAFT.

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.415 | 0.425 | 10.54 | 10.79 |
| B | 0.415 | 0.425 | 10.54 | 10.79 |
| C | 0.500 | 0.520 | 12.70 | 13.21 |
| D | 0.038 | 0.042 | 0.96 | 1.07 |
| G | 0.100 BSC | | 2.54 BSC | |
| H | 0.002 | 0.010 | 0.05 | 0.25 |
| J | 0.009 | 0.011 | 0.23 | 0.28 |
| K | 0.061 | 0.071 | 1.55 | 1.80 |
| M | 0° | 7° | 0° | 7° |
| N | 0.444 | 0.448 | 11.28 | 11.38 |
| S | 0.709 | 0.725 | 18.01 | 18.41 |
| V | 0.245 | 0.255 | 6.22 | 6.48 |
| W | 0.115 | 0.125 | 2.92 | 3.17 |

**CASE 482A-01
ISSUE A**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.



SUNSTAR商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有10多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌IC芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）www.SENSOR-IC.COM 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到中国，共同开拓市场。本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。我们公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专业从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达军工产品网：<http://www.junpinic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦1602室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS888@hotmail.com

邮编：518033 E-mail: szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场2583号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路132号中发电子大厦3097号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路668号上海赛格电子市场D125号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区20所(中国电子科技集团导航技术研究所)

西安劳动南路88号电子商城二楼D23号

TEL: 029-81022619 13072977981 FAX:029-88789382