

**SUNSTAR商斯达实业集团**是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有10多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌IC芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。**专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）www.SENSOR-IC.COM 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到中国，共同开拓市场。**本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。**我公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专门从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。**

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达军工产品网：<http://www.junpinic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦1602室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: [SUNS888@hotmail.com](mailto:SUNS888@hotmail.com)

邮编：518033 E-mail:[szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场2583号 电话：0755-83665529








技术支持：0755-83394033 13501568376



## Reed Switch Catalogue

[www.StandexElectronics.com](http://www.StandexElectronics.com)
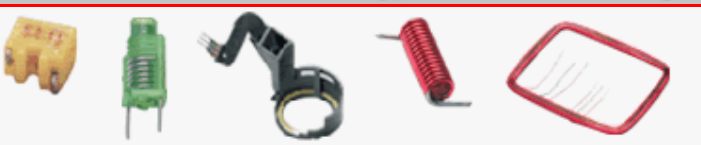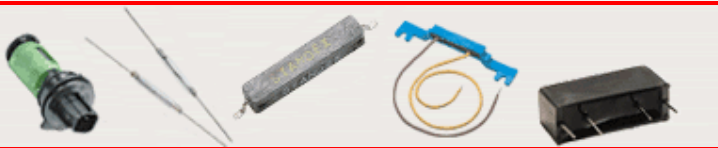
## Standex Product Offerings:

<p><b>Low-Frequency Magnetics</b></p>	
<p><b>High-Frequency Magnetics</b></p>	
<p><b>Antenna &amp; RF Magnetics</b></p>	
<p><b>Magnetic Reed Switches, Sensors &amp; Relays</b></p>	
<p><b>Hermetic Connector Products</b></p>	
<p><b>Precision Stamping &amp; Value-Added Packaging</b></p>	
<p><b>HID Lighting Products</b></p>	

## Standex Global Locations

### Divisional Headquarters – USA:

Standex Electronics, Inc.  
4538 Camberwell Road  
Cincinnati, Ohio 45209 USA  
Phone: +513 871 3777  
Fax: +513 871 3779  
Toll Free - US: 866-STANDEX (866-782-6339)

### United Kingdom:

Standex Electronics (U.K.) Ltd  
40 Morley Road, Tonbridge  
Kent, TN9 1RA, UK  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

### Canada:

Standex Electronics/ATC-Frost Magnetics, Inc.  
1130 Eighth Line, Oakville  
Ontario, LH6 2R4 Canada

### China:

Standex Electronics (Tianjin) Co., Ltd.  
No.4 Factory Building,  
61#, Huasheng Road,  
East of Jinwei Ave.,  
Beichen High-Tech Industrial Park  
Tianjin 300402, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86

### Mexico:

Standex Electronics, S.I. de Mexico S.A. de C.V.  
Calle Primera #2550, Agua Prieta  
Sonora Mexico 84270

## **Contents:**

<b>About Standex Electronics</b>	<b>4</b>
<b>Mission Statement</b>	<b>4</b>
<b>History of Standex Electronics</b>	<b>4</b>
<b>Professional Grade Reed switch quick selection chart</b>	<b>5</b>
<b>GR501</b>	<b>6</b>
<b>GP501</b>	<b>8</b>
<b>GR560</b>	<b>10</b>
<b>GP560</b>	<b>12</b>
<b>GR100</b>	<b>14</b>
<b>GP100</b>	<b>16</b>
<b>NL126</b>	<b>18</b>
<b>PR560</b>	<b>20</b>
<b>PR126</b>	<b>22</b>
<b>Custom lead forming and customer specific requirements</b>	<b>24</b>
<b>Commercial Grade Reed switch quick selection chart</b>	<b>26</b>
<b>TS501</b>	<b>27</b>
<b>TR501</b>	<b>29</b>
<b>TS560</b>	<b>31</b>
<b>TR560</b>	<b>33</b>
<b>TS100</b>	<b>35</b>
<b>TR100</b>	<b>37</b>
<b>Reed switch structure and operation</b>	<b>39</b>
<b>Reed switch actuation</b>	<b>39</b>
<b>Typical Applications</b>	<b>41</b>
<b>Glossary</b>	<b>41</b>



## About Standex Electronics

Standex Electronics, Inc. is a subsidiary of **Standex International Corporation**; symbol SXI on the New York Stock Exchange. Standex Electronics is registered to quality standard **ISO/TS 16949:2002**. Standex Electronics divisional headquarters is located in Cincinnati, Ohio, USA. In addition to the factory in Ohio, facilities are also maintained in Agua Prieta, Mexico; Arizona, USA; Kent, UK; Ontario, Canada; and Tianjin, China. Standex Electronics is a manufacturer of electronic components and subassemblies including, inductors, chokes, transformers, antenna coils, reed switches, reed relays, proximity sensors, fluid-level sensors, connectors, progressive die stampings, insert-moulded plastic components, and custom products combining many of the above components. In addition to manufacturing facilities, Standex Electronics also maintains a sophisticated testing laboratory. Standex Electronics specializes in electro-mechanical engineered solutions.

With laboratory testing capabilities as diverse as the products we manufacture, Standex Electronics offers laboratory testing support that is unmatched within our industry.

- Thermal Shock Testing (-70<sup>0</sup>C to +200<sup>0</sup>C, LN2 boost assures less than a 5 minute air-temperature recovery time).
- Thermal Cycle Testing (-68<sup>0</sup>C to +177<sup>0</sup>C).
- Humidity Testing (-18<sup>0</sup>C to +93<sup>0</sup>C, 98% RH, cycle temp or steady state).
- Vibration Testing (Sine or Random profile, 1" pk-pk displacement, 0 to 80 g pk, 5 to 2000 HZ).
- Mechanical Shock Drop Testing (½ sine 50g 11ms, ½ sine 1500g .5ms, or saw tooth 100g 6ms).
- Hi Temp Testing (Up to +260<sup>0</sup>C).
- Salt Fog Testing.
- Solderability Testing.
- Lead Pull Testing.
- Cross-Sectioning.
- Polishing.
- Microscopic Inspection.
- X-Ray.



What differentiates Standex Electronics from its competition is turnkey solutions, from concept, through design, pre-production, qualification testing, manufacturing, and service after the sale.

## Mission Statement


Standex Electronics is committed to providing products that offer an unmatched value through continuous improvement and employee involvement. The company conducts its business by recognizing safety, morale and professional development of all employees.

## History of Standex Electronics

Standex Electronics was established in 1969 when Standex International purchased the Paul Smith Company. Standex Electronics has grown over the years by developing new products internally as well as by synergistic acquisition. Acquisitions, and strategic license agreements, include Underwood Electric (1973), Van Products (1974), Comtelco (1978), ATR Coil (1998), Classic Coil Winding (1998), ATC-Frost Magnetics (2001), Cin-Tran (2002), Magnetico (2003) and Lepco (2004).

## Professional grade reed switch quick selection chart:

All Standex switches are UL recognised  
All Standex switches are RoHS compliant.

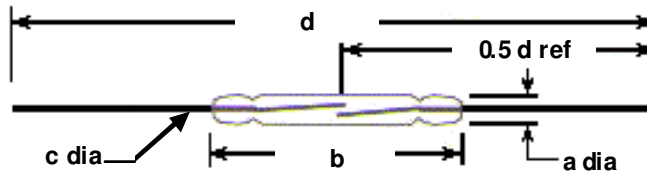


Switch type	GR501 / GP501	GR560 / GP560	GR100 / GP100	NL126	PR560	PR126
<b>Physical Characteristics</b>						
Glass dia max - a	2.3mm	2.3mm	2.5mm	2.5mm	2.3mm	2.5mm
Glass length max - b	12.7mm	14.2mm	20.3mm	20.3mm	14.2mm	20.3mm
Lead dia nominal - c	0.45mm	0.6mm	0.6mm	0.7mm	0.6mm	0.7mm
Overall length - d	54.0mm	54.0mm	54.0mm	54.0mm	54.0mm	54.0mm
<b>Electrical Characteristics</b>						
Contact material	Rh / PGM alloy	Rh / PGM alloy	Rh / PGM alloy	Rhodium	Rhodium	Rhodium
Power rating maximum	10 VA	10 VA	10 VA	50 VA	10 VA	70 VA
Switching current maximum	0.5 Amp DC & AC	1.0 Amp DC & AC	1.0 Amp DC & AC	1.5 Amp DC & AC	1.0 Amp DC & AC	1.5 Amp DC & AC
Carry current maximum	0.8 Amp DC & AC	1.5 Amp DC & AC	1.5 Amp DC & AC	2.5 Amp DC & AC	1.5 Amp DC & AC	2.5 Amp DC & AC
Switching voltage maximum	100 VDC 125 VAC	100 VDC 125 VAC	100 VDC 150 VAC	200 VDC 150 VAC	250 VAC 100 VDC	300 VAC 200 VDC
Breakdown volt min @20AT	200 VDC	200 VDC	250 VDC	250 VDC	600 VDC	750 VDC
Contact resistance	150 mΩ	100 mΩ	100 mΩ	100 mΩ	100 mΩ	100 mΩ
Insulation resistance minimum	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω
Contact capacitance pf maximum	0.3 pF	0.2 pF	0.2 pF	0.3 pF	0.2 pF	0.3 pF
<b>Operating Characteristics</b>						
Magnetic sensitivity, pull in range	7-30 AT	10-50 AT	10-60 AT	20-60 AT	20-40 AT	20-50 AT
Operate time, inc. bounce typ	1.0 msecs	0.6 msecs	0.8 msecs	0.8 msecs	0.6 msecs	0.8 msecs
Release time typical	0.1 msecs	0.1 msecs	0.1 msecs	0.1 msecs	0.1 msecs	0.1 msecs
Resonant Frequency	3.2 kHz	3.0 kHz	2.2 kHz	2.2 kHz	3.0 kHz	2.2 kHz
Vibration, 10-2000Hz maximum	50 G	50 G	40 G	30 G	50 G	30 G
Shock, 11-ms. ½ sine wave max	100 G	100 G	100 G	100 G	100 G	100 G
Operating temperature	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C
Storage temperature	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C

## GR501

- Sub miniature reed switch with rhodium alloy contacts.
- Designed for applications where the available magnetic field is very low.
- Useful for "wide-gap" security system applications and other magnetic systems requiring long operating distances with permanent magnets.

### Physical Characteristics:

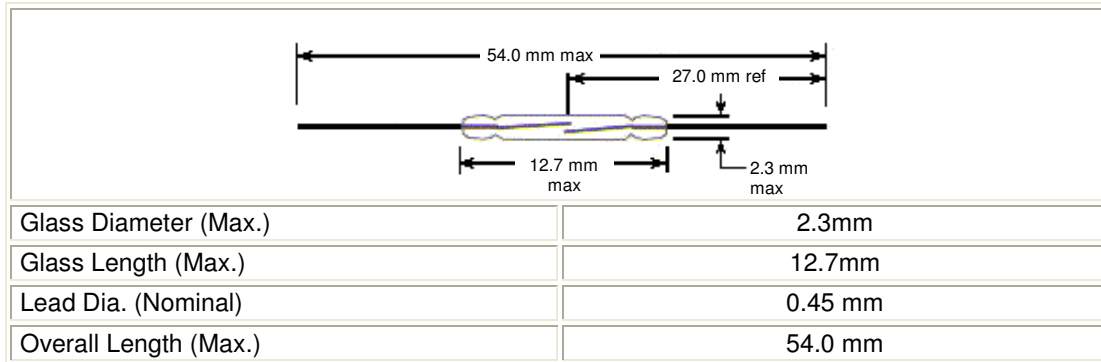

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Rhodium
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	0.5 Amp. DC, 0.5 Amp. AC
Carry Current (Max.)	0.8 Amp. DC, 0.8 Amp. AC
Switching Voltage (Max.)	100 VDC, 125 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	200 Volts DC
Contact Resistance <sup>3</sup>	150 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.3 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.

2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes

3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:

Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA
Life	100 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	10 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


© **Standex Electronics Inc.**

[www.StandexElectronics.com](http://www.StandexElectronics.com)


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	7 to 30 Ampere Turns
Magnetic Sensitivity (Range - Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	1.0 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts

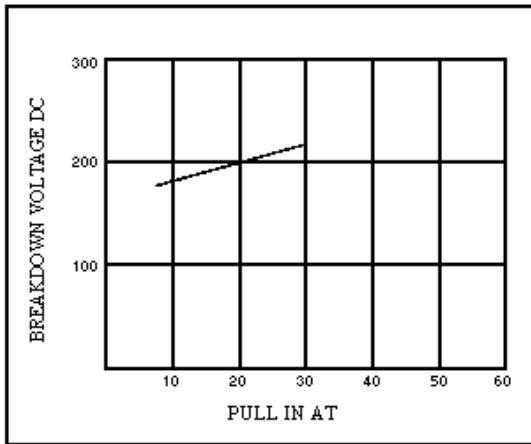


Breakdown Voltage Plotted Against Pull-In Ampere Turns

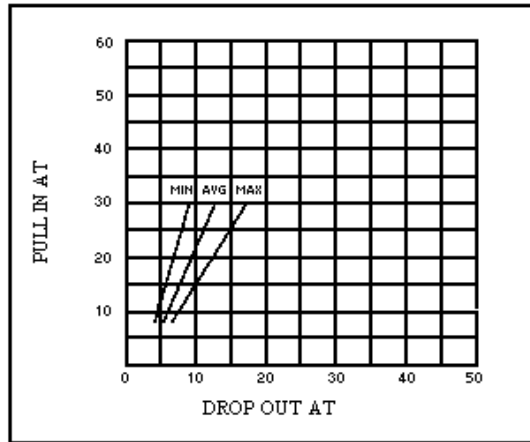

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

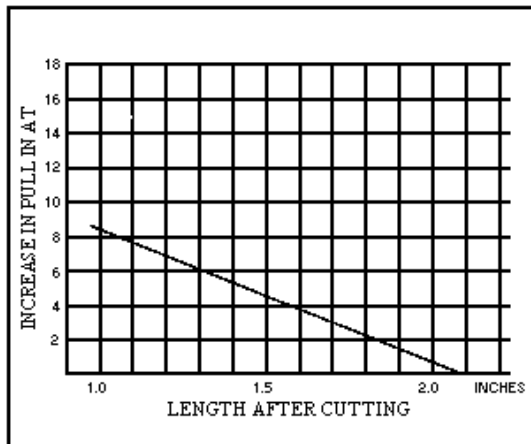

Change In Pull-In Ampere Turns After Switch Lead Cutting

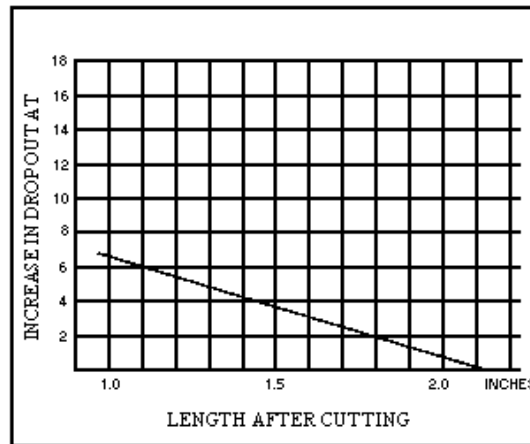

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

**www.StandexElectronics.com**

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779

Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22


Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86



## GP501

- Sub miniature reed switch with PGM alloy contacts.
- Designed for applications where the available magnetic field is very low and/or a high stability contact resistance is required
- Useful for "wide-gap" security system applications and other magnetic systems requiring long operating distances with permanent magnets.

### Physical Characteristics:

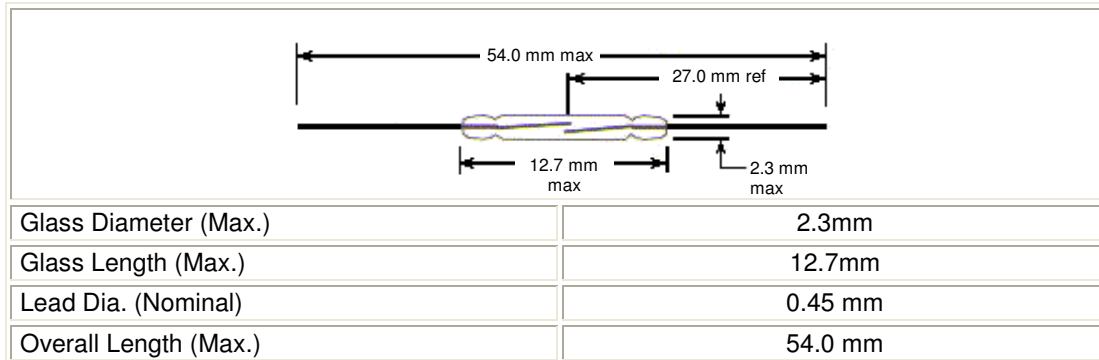

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	PGM alloy
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	0.5 Amp. DC, 0.5 Amp. AC
Carry Current (Max.)	0.8 Amp. DC, 0.8 Amp. AC
Switching Voltage (Max.)	100 VDC, 125 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	200 Volts DC
Contact Resistance <sup>3</sup>	150 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.3 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.

2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes

3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:

Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA
Life	100 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	10 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


© Standex Electronics Inc.

[www.StandexElectronics.com](http://www.StandexElectronics.com)


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	7 to 30 Ampere Turns
Magnetic Sensitivity (Range - Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	1.0 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts

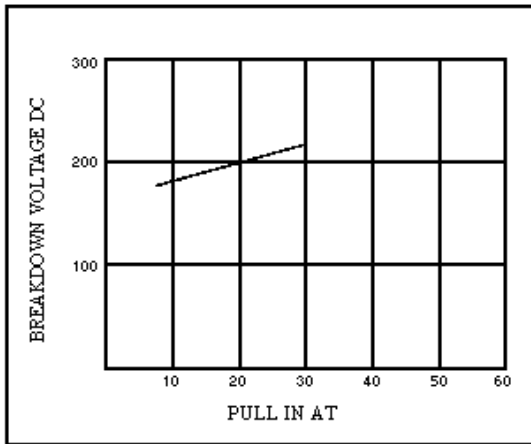


Breakdown Voltage Plotted Against Pull-In Ampere Turns

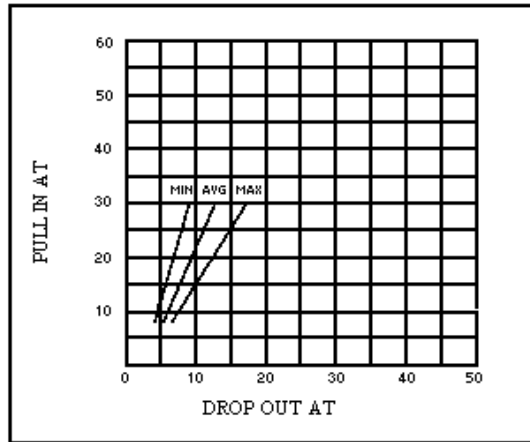

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

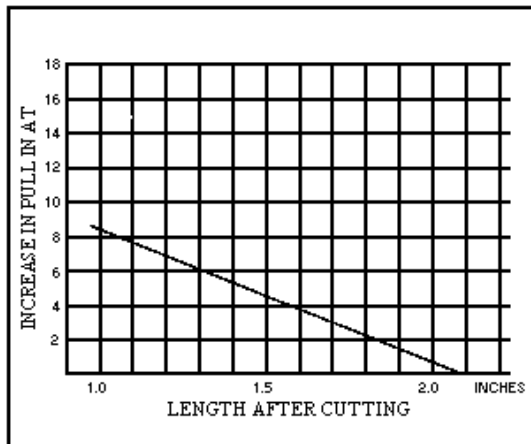

Change In Pull-In Ampere Turns After Switch Lead Cutting

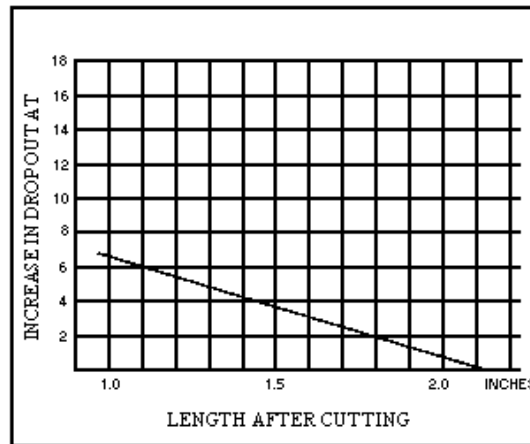

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

**www.StandexElectronics.com**

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779

Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86

**GR560**

- General-purpose miniature reed switch with rhodium contacts.
- Gives superior life switching relatively heavy loads in a miniature glass package.
- Has the ability to maintain a low contact resistance over life switching light duty logic level loads.
- Normal applications include liquid level sensors, security systems, reed relays, proximity sensors and counting devices.

**Physical Characteristics:**

Glass Diameter (Max.)	2.3mm
Glass Length (Max.)	14.2mm
Lead Dia. (Nominal)	0.6 mm
Overall Length (Max.)	54.0 mm

**Electrical Characteristics:**

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Rhodium
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Carry Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Switching Voltage (Max.)	100 VDC, 125 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	200 Volts DC
Contact Resistance <sup>3</sup>	100 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf
<p>1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.</p> <p>2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.</p> <p>3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.</p>	

**Minimum Switching Life with Standard Test Loads, using 20AT switch:**


Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA
Life	100 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	100 x 10 <sup>6</sup>	5 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	10 to 50 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.6 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.0 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. ½ Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

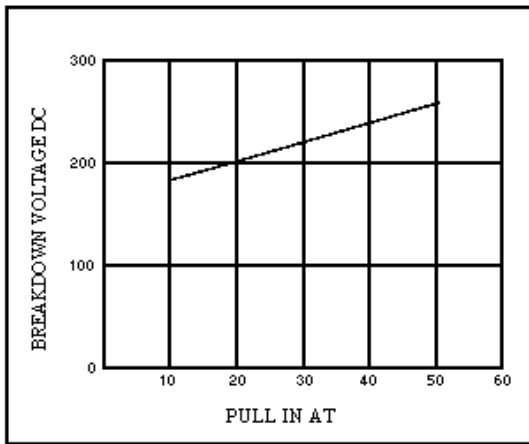


Breakdown Voltage Plotted Against Pull-In Ampere Turns

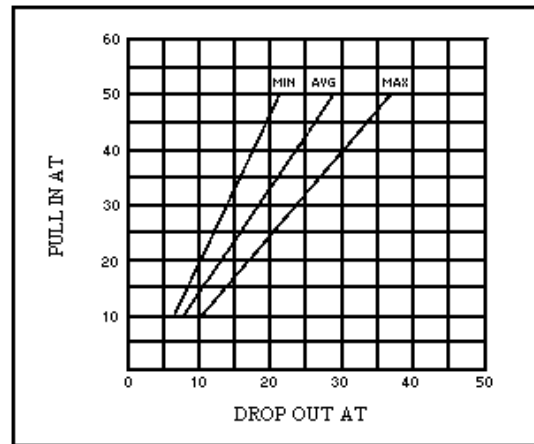

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

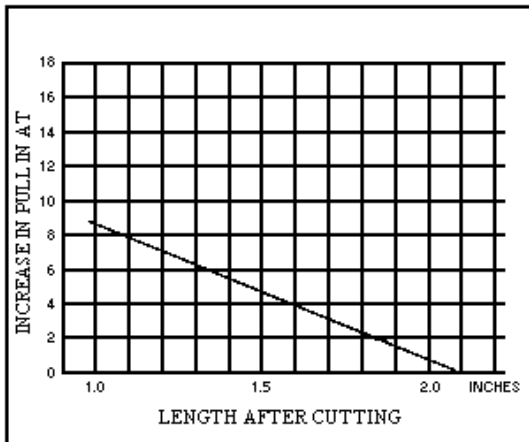

Change In Pull-In Ampere Turns After Switch Lead Cutting

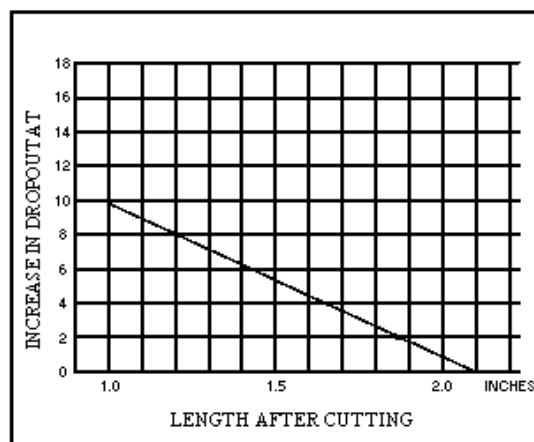

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

**[www.StandexElectronics.com](http://www.StandexElectronics.com)**

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779


Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86

## GP560

- General-purpose miniature reed switch with PGM alloy contacts.
- Gives superior life switching relatively heavy loads in a miniature glass package.
- High stability contact resistance.
- Normal applications include liquid level sensors, security systems, reed relays, proximity sensors and counting devices.

### Physical Characteristics:

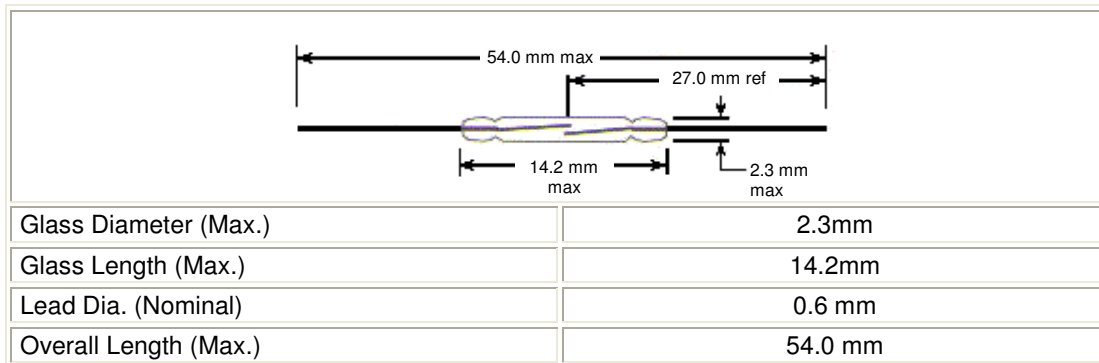

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	PGM alloy
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Carry Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Switching Voltage (Max.)	100 VDC, 125 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	200 Volts DC
Contact Resistance <sup>3</sup>	100 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.
2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.
3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:

Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA
Life	100 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	100 x 10 <sup>6</sup>	5 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


© Standex Electronics Inc.

[www.StandexElectronics.com](http://www.StandexElectronics.com)


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	10 to 50 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.6 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.0 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. ½ Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

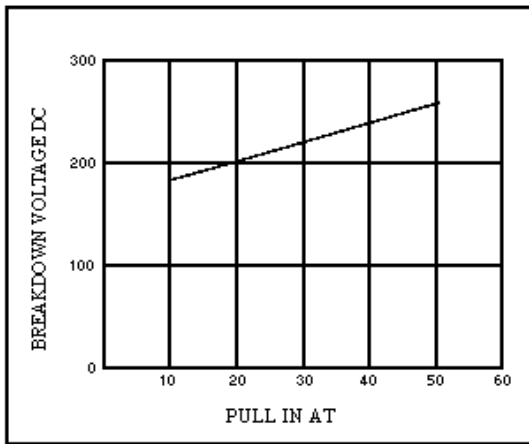


Breakdown Voltage Plotted Against Pull-In Ampere Turns

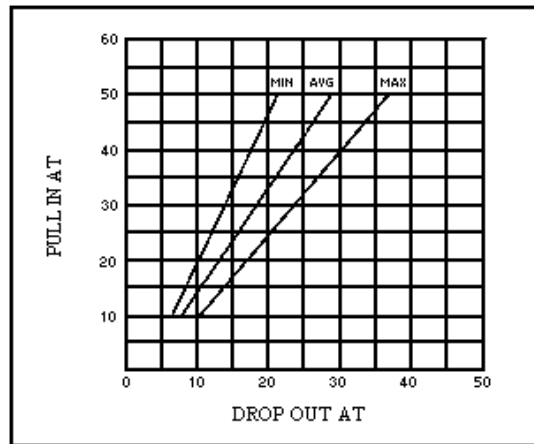

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

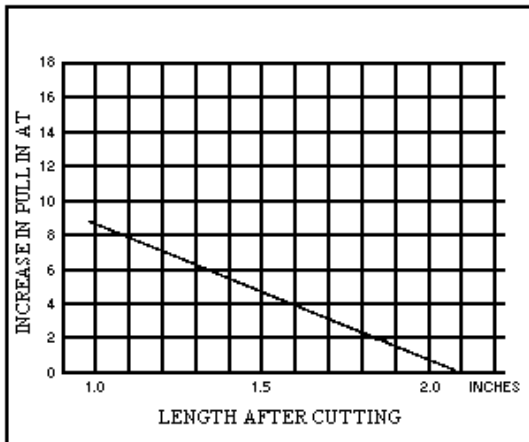

Change In Pull-In Ampere Turns After Switch Lead Cutting

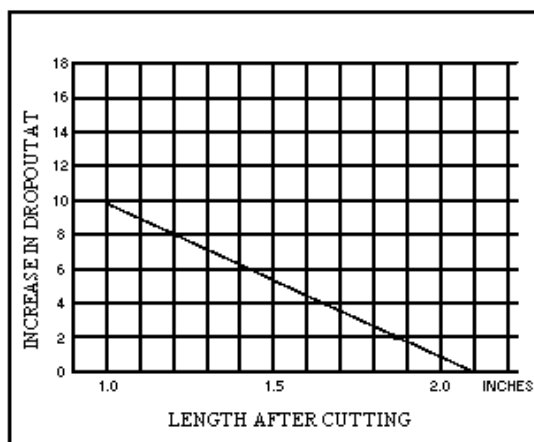

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

**www.StandexElectronics.com**

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779

Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86

## GR100

- General purpose reed switch with rhodium contacts.
- Designed to give superior life switching relatively heavy loads.
- Normal applications include liquid level sensors, security systems, reed relays, proximity sensors and counting devices.
- Ideally suited to handle normal 120 VAC loads.
- Maintains low contact resistance over life switching light duty logic level loads.

### Physical Characteristics:

Glass Diameter (Max.)	2.5mm
Glass Length (Max.)	20.3mm
Lead Dia. (Nominal)	0.6 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Rhodium
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Carry Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Switching Voltage (Max.) <sup>4</sup>	100 VDC, 150 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	250 Volts DC
Contact Resistance <sup>3</sup>	100 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf
<p>1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.</p> <p>2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.</p> <p>3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.</p> <p>4. When switching 150 VAC please contact a Standex application engineer.</p>	

### Minimum Switching Life with Standard Test Loads, using 20AT switch:

Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC	150 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA	60 mA
Life	1000 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	100 x 10 <sup>6</sup>	8 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


© Standex Electronics Inc.

[www.StandexElectronics.com](http://www.StandexElectronics.com)


## Operating Characteristics

Magnetic Sensitivity (Range - Pull In)	10 to 60 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.8 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	2.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	40 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


### Charts:

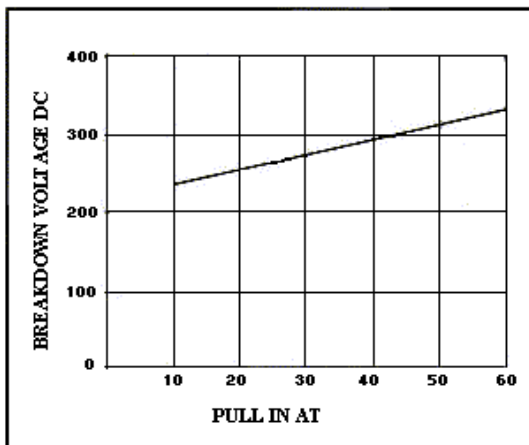


Breakdown Voltage Plotted Against Pull-In Ampere Turns

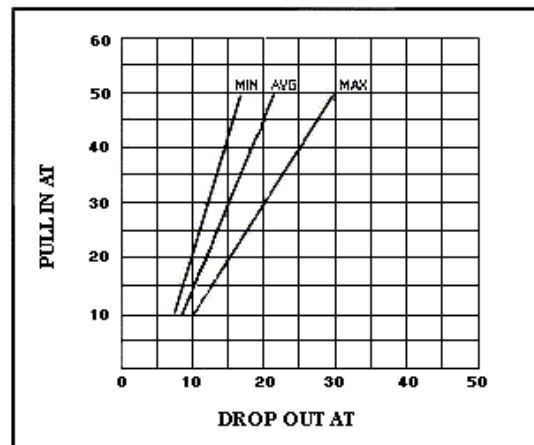

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

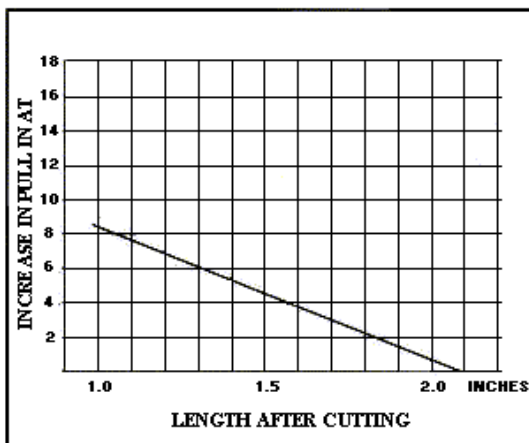

Change In Pull-In Ampere Turns After Switch Lead Cutting

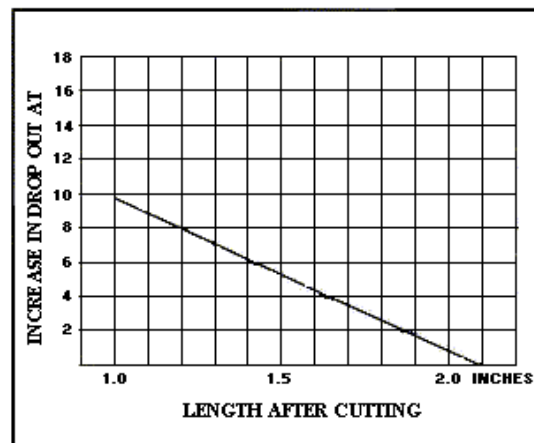

Change In Drop-Out Ampere Turns After Switch Lead Cutting

<b>© Standex Electronics Inc.</b>			<b>www.StandexElectronics.com</b>		
Cincinnati, Ohio USA	Tonbridge, United Kingdom	Tianjin, China			
Phone +513 871 3777	Phone +44 1732 77 10 23	Tel: +86 22 86 99 68 81~5			
Fax +513 871 3779	Fax +44 1732 77 01 22	Fax: +86 22 86 99 68 86			



## GP100

- General purpose reed switch with PGM alloy contacts.
- Designed to give superior life switching relatively heavy loads.
- Normal applications include liquid level sensors, security systems, reed relays, proximity sensors and counting devices.
- Ideally suited to handle normal 120 VAC loads.
- High stability contact resistance.

### Physical Characteristics:

Glass Diameter (Max.)	2.5mm
Glass Length (Max.)	20.3mm
Lead Dia. (Nominal)	0.6 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	PGM alloy
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Carry Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Switching Voltage (Max.) <sup>4</sup>	100 VDC, 150 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	250 Volts DC
Contact Resistance <sup>3</sup>	100 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.
2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.
3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.
4. When switching 150 VAC please contact a Standex application engineer.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:

Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC	150 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA	60 mA
Life	1000 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	100 x 10 <sup>6</sup>	8 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


© Standex Electronics Inc.

[www.StandexElectronics.com](http://www.StandexElectronics.com)


## Operating Characteristics

Magnetic Sensitivity (Range - Pull In)	10 to 60 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.8 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	2.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	40 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


### Charts:

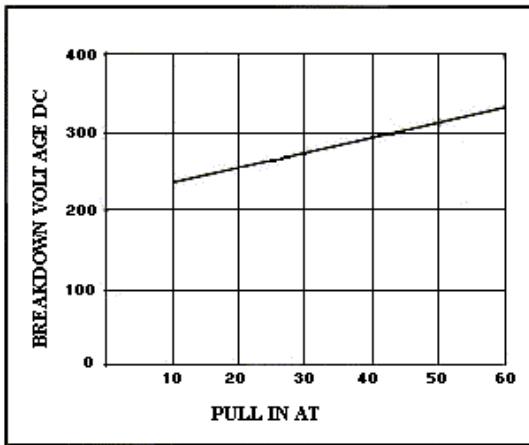


Breakdown Voltage Plotted Against Pull-In Ampere Turns

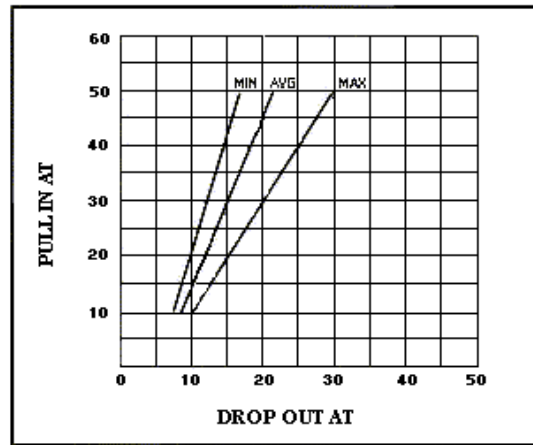

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

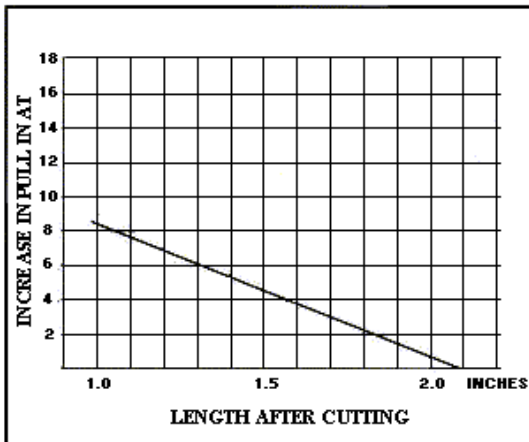

Change In Pull-In Ampere Turns After Switch Lead Cutting

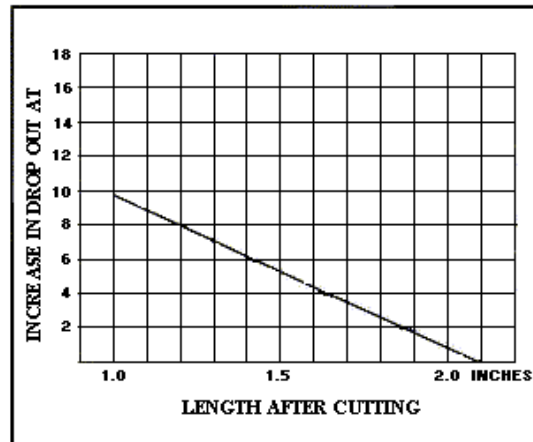

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

[www.StandexElectronics.com](http://www.StandexElectronics.com)

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779


Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86

## NL126

- General-purpose miniature reed switch with rhodium contacts.
- Designed to give superior life switching relatively heavy loads.
- Normal applications include test equipment, instrumentation, liquid level sensing and incandescent lamp switching.

### Physical Characteristics:

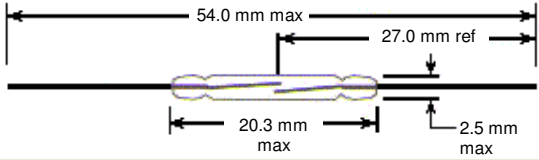

Glass Diameter (Max.)	2.5 mm
Glass Length (Max.)	20.3 mm
Lead Dia. (Nominal)	0.7 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Rhodium
Power Rating <sup>1</sup>	50VA maximum
Switching Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Carry Current (Max.)	2.5 Amp. DC, 2.5 Amp. AC
Switching Voltage (Max.) <sup>4</sup>	200 VDC, 150 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	250 Volts DC
Contact Resistance <sup>3</sup>	100 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.3 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.
2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.
3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.
4. When switching 150 VAC please contact a Standex application engineer.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:


Voltage	5 VDC	10 VDC	12 VDC	12 VDC	24 VDC	50 VDC	100 VAC	150 VAC
Current	2 mA	1 A	10 mA	3 A	10 mA	1 A	100 mA	200 mA
Life	1 x 10 <sup>9</sup>	3 x 10 <sup>6</sup>	500 x 10 <sup>6</sup>	50 x 10 <sup>3</sup>	10 x 10 <sup>6</sup>	3 x 10 <sup>6</sup>	3 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics

Magnetic Sensitivity (Range - Pull In)	20 to 60 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.8 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	2.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	30 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


### Charts:

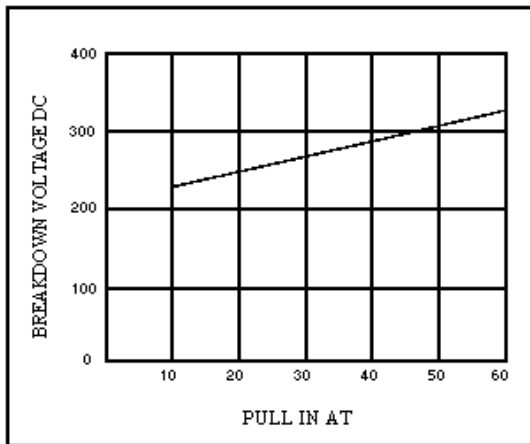


Breakdown Voltage Plotted Against Pull-In Ampere Turns

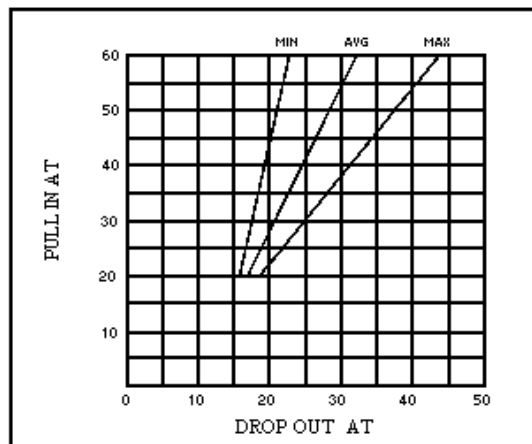

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

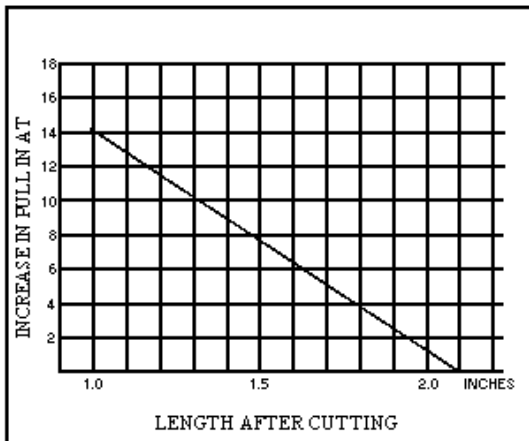

Change In Pull-In Ampere Turns After Switch Lead Cutting

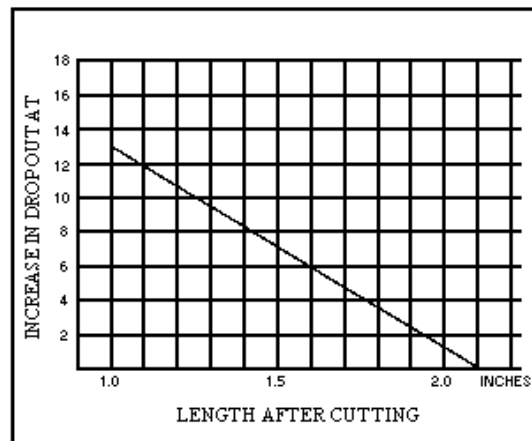


Change In Drop-Out Ampere Turns After Switch Lead Cutting

<b>© Standex Electronics Inc.</b>		<b><a href="http://www.StandexElectronics.com">www.StandexElectronics.com</a></b>
Cincinnati, Ohio USA Phone +513 871 3777 Fax +513 871 3779	Tonbridge, United Kingdom Phone +44 1732 77 10 23 Fax +44 1732 77 01 22	Tianjin, China Tel: +86 22 86 99 68 81~5 Fax: +86 22 86 99 68 86

## PR560

- High voltage medium power applications reed switch with rhodium contacts
- Designed to give superior life switching relatively heavy loads

### Physical Characteristics:

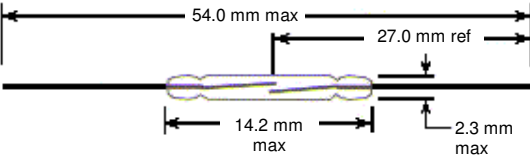

Glass Diameter (Max.)	2.3mm
Glass Length (Max.)	14.2mm
Lead Dia. (Nominal)	0.6 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Rhodium
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Carry Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Switching Voltage (Max.)	100 VDC, 250 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	600 Volts DC
Contact Resistance <sup>3</sup>	100 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf

1) The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.

2) Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.

3) Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:


Voltage	12 VDC	24 VDC	100 VDC	125 VAC	240 VDC	240 VAC
Current	10 mA	10 mA	100 mA	80 mA	10 mA	40 mA
Life	100 x 10 <sup>6</sup>	5 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	2 x 10 <sup>5</sup>	5 x 10 <sup>5</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	20 to 40 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.6 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.0 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. ½ Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

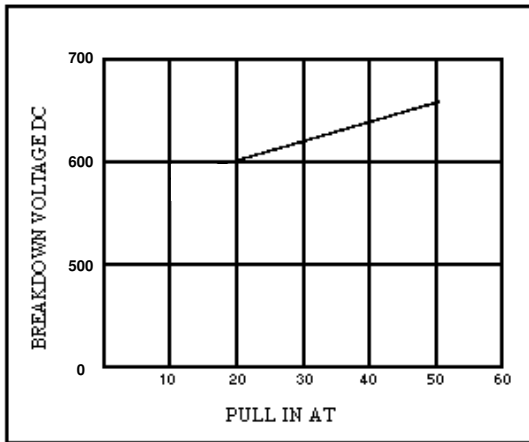


Breakdown Voltage Plotted Against Pull-In Ampere Turns

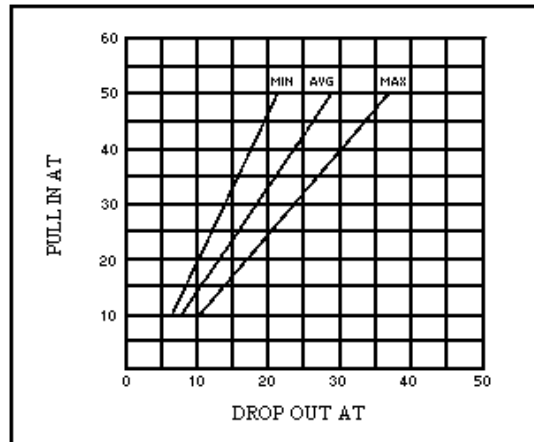

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

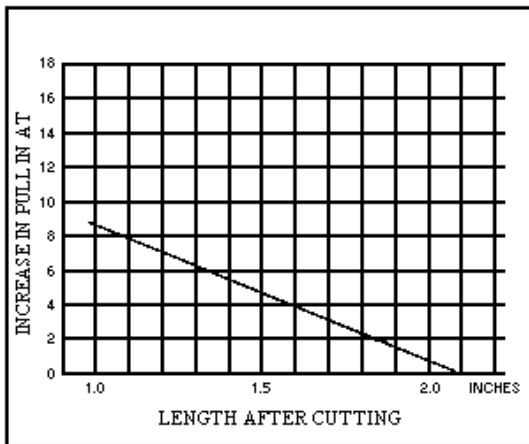

Change In Pull-In Ampere Turns After Switch Lead Cutting

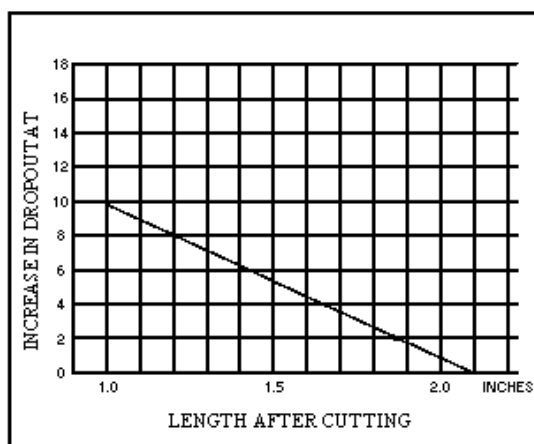

Change In Drop-Out Ampere Turns After Switch Lead Cutting

<b>© Standex Electronics Inc.</b>			<b>www.StandexElectronics.com</b>		
Cincinnati, Ohio USA	Tonbridge, United Kingdom	Tianjin, China			
Phone +513 871 3777	Phone +44 1732 77 10 23	Tel: +86 22 86 99 68 81~5			
Fax +513 871 3779	Fax +44 1732 77 01 22	Fax: +86 22 86 99 68 86			

## PR126

- High voltage high power applications reed switch with rhodium contacts
- Designed to give superior life switching relatively heavy loads

### Physical Characteristics:

Glass Diameter (Max.)	2.5 mm
Glass Length (Max.)	20.3 mm
Lead Dia. (Nominal)	0.7 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Rhodium
Power Rating <sup>1</sup>	70VA maximum
Switching Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Carry Current (Max.)	2.5 Amp. DC, 2.5 Amp. AC
Switching Voltage (Max.)	200 VDC, 300 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	750 Volts DC
Contact Resistance <sup>3</sup>	100 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.3 pf
<p>1) The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.</p> <p>2) Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.</p> <p>3) Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43mm centres.</p>	


### Minimum Switching Life with Standard Test Loads, using 20AT switch:

Voltage	24 VDC	100 VDC	125 VAC	240 VDC	240 VAC
Current	10 mA	100 mA	80 mA	40 mA	40 VA lamp load, 5 sec period, 10% duty cycle
Life	5 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	2 x 10 <sup>5</sup>	5 x 10 <sup>5</sup>
Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.					


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	20 to 50 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.8 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	2.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	30 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

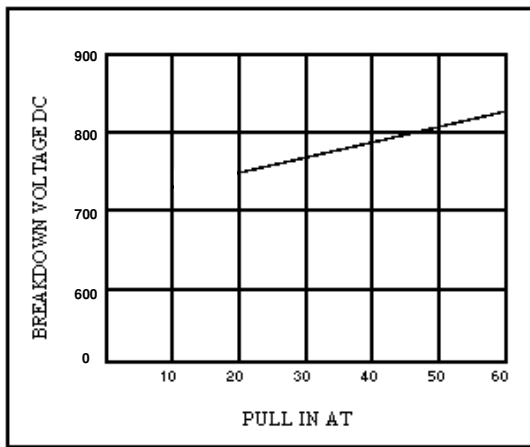


Breakdown Voltage Plotted Against Pull-In Ampere Turns

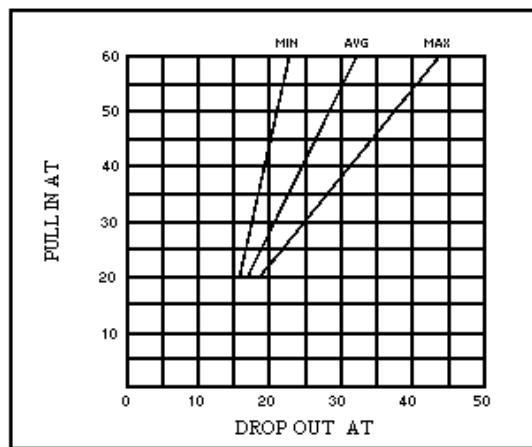

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

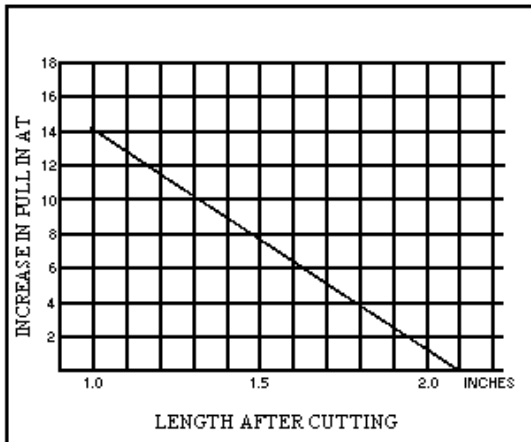

Change In Pull-In Ampere Turns After Switch Lead Cutting

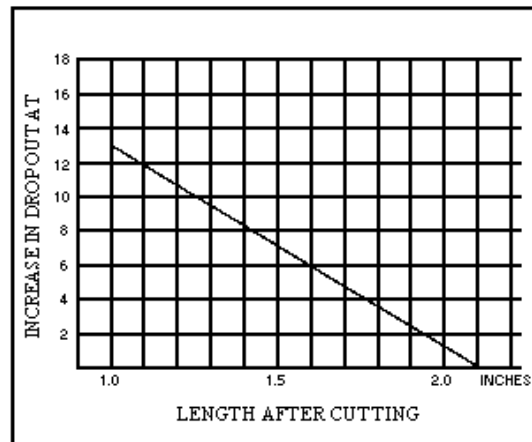

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

[www.StandexElectronics.com](http://www.StandexElectronics.com)

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779

Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22


Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86




## Custom lead forming and customer specific requirements

Standex can accommodate custom lead forming and/or cropping including surface mount options supplied in tape and reel or loose. Surface mount options can be over moulded or a bare reed switch with a custom formed lead, see following drawing for dimensions. We can supply various over moulded switch types and we can weld longer terminals depending on customer specific requirements upon request:

High volume requirements of any of the above are easily accommodated.

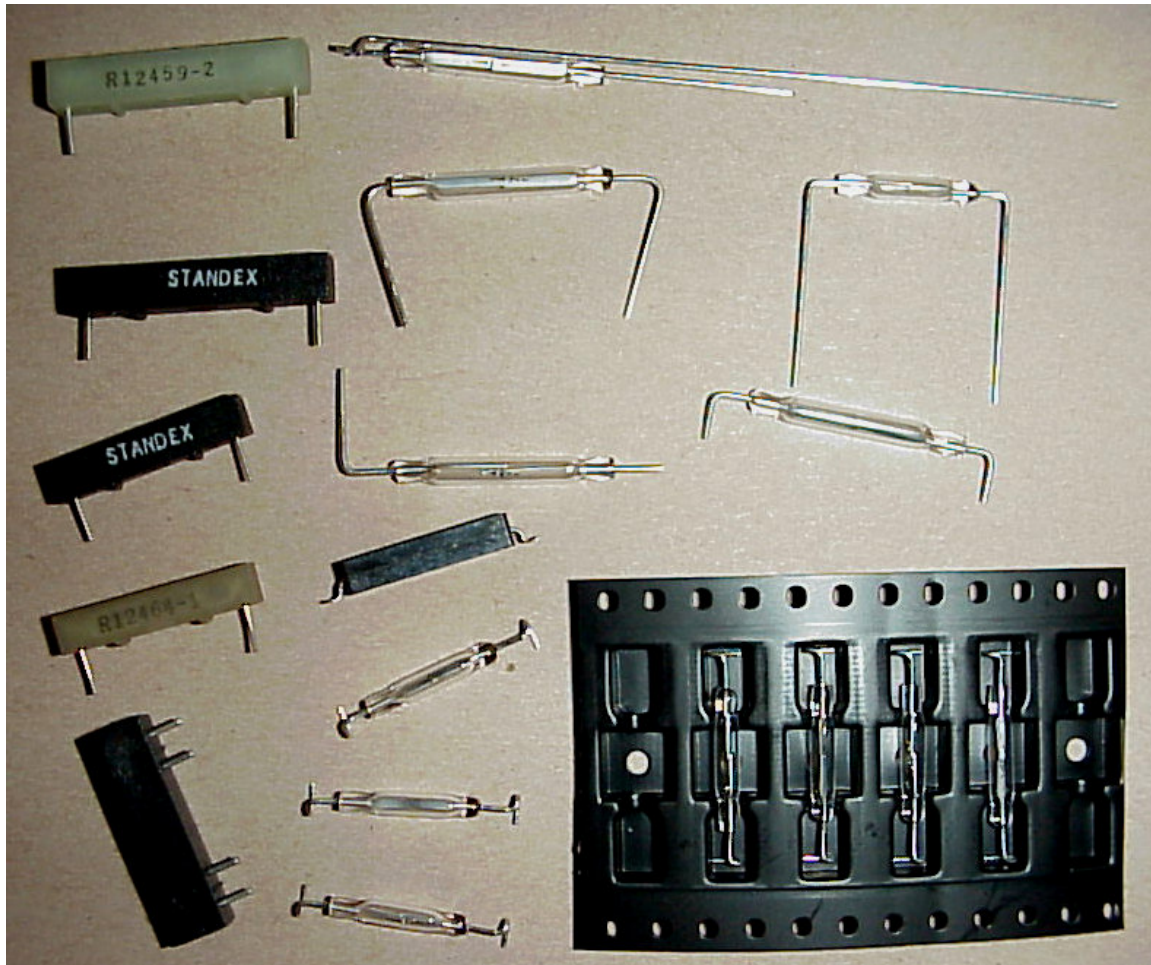


Custom lead forming and encapsulated reed switches

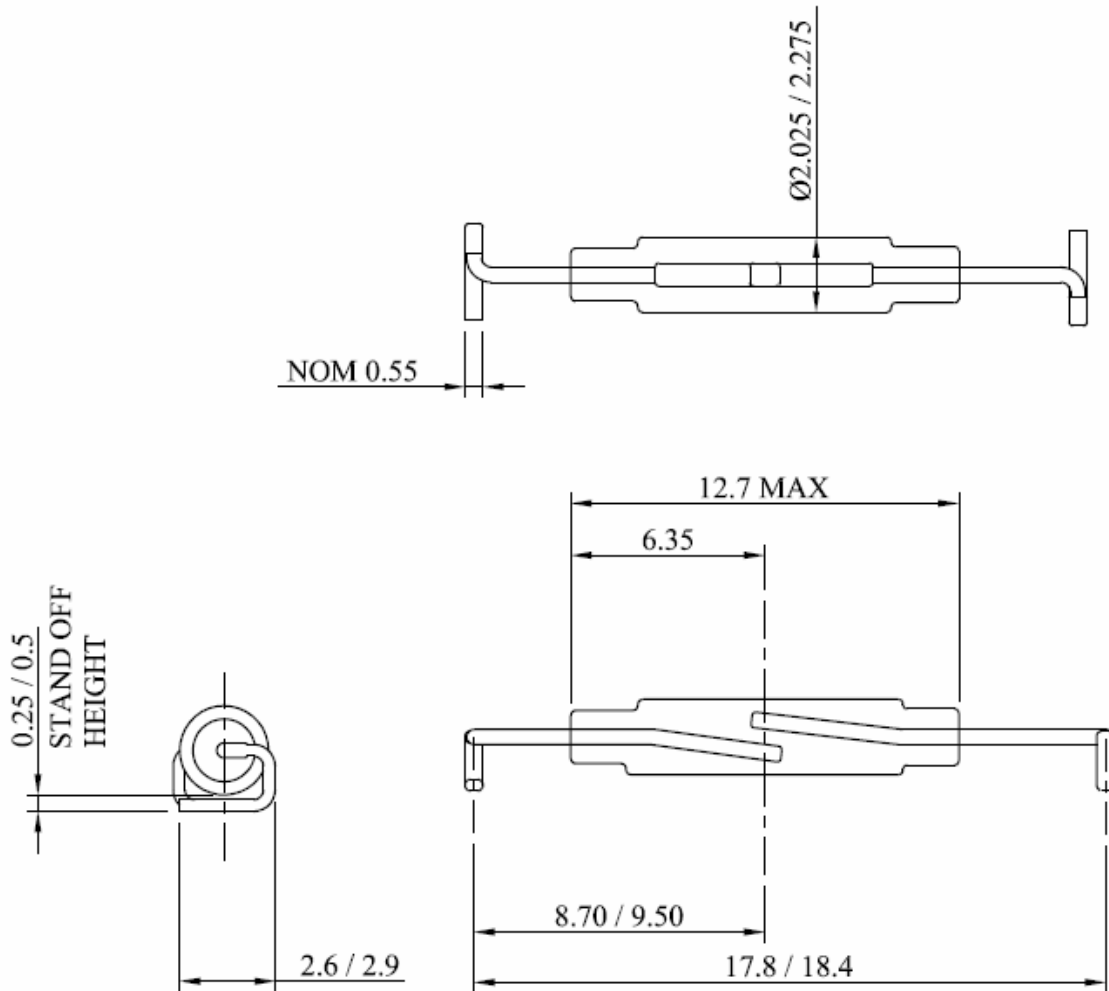

Bare glass surface mount reed switch dimensions using a 501 base switch variant, available in tape and reel or loose packed.

## Commercial grade reed switch quick selection chart:

All Standex switches are UL recognised and RoHS compliant.

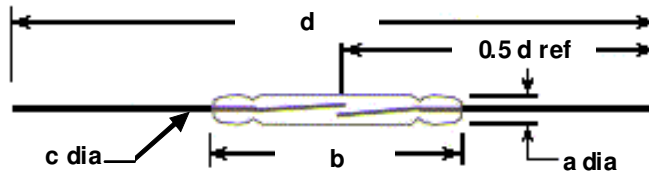


Switch type	TS501	TR501	TS560	TR560	TS100	TR100
<b>Physical Characteristics</b>						
Glass dia (max) - a	2.3mm	2.3mm	2.3mm	2.3mm	2.5mm	2.5mm
Glass length max - b	12.7mm	12.7mm	14.2mm	14.2mm	21.0mm	21.0mm
Lead dia nominal - c	0.45mm	0.45mm	0.6mm	0.6mm	0.7mm	0.7mm
Overall length - d	54.0mm	54.0mm	54.0mm	54.0mm	54.0mm	54.0mm
<b>Electrical Characteristics</b>						
Contact material	Noble metal	Noble metal	Noble metal	Noble metal	Noble metal	Noble metal
Power rating maximum	7 VA	10 VA	8 VA	10 VA	8 VA	10 VA
Switching current maximum	0.3 Amp DC & AC	0.5 Amp DC & AC	0.5 Amp DC & AC	1.0 Amp DC & AC	0.5 Amp DC & AC	1.0 Amp DC & AC
Carry current maximum	0.5 Amp DC & AC	0.8 Amp DC & AC	1.0 Amp DC & AC	1.5 Amp DC & AC	1.0 Amp DC & AC	1.5 Amp DC & AC
Switching voltage maximum	50 VDC 75 VAC	100 VDC 125 VAC	75 VDC 100 VAC	100 VDC 125 VAC	100 VAC 125 VDC	100 VAC 150 VDC
Breakdown volt minimum @20AT	150 Volts DC	200 Volts DC	150 Volts DC	200 Volts DC	200 Volts DC	250 Volts DC
Contact resistance	250 mΩ	200 mΩ	250 mΩ	200 mΩ	250 mΩ	200 mΩ
Insulation resistance minimum	10 <sup>9</sup> Ω	10 <sup>12</sup> Ω	10 <sup>9</sup> Ω	10 <sup>12</sup> Ω	10 <sup>9</sup> Ω	10 <sup>12</sup> Ω
Contact capacitance pf maximum	0.3 pF	0.3 pF	0.2 pF	0.2 pF	0.2 pF	0.2 pF
<b>Operating Characteristics</b>						
Magnetic sensitivity (range - pull in)	10 to 30 AT	7 to 30 AT	10 to 35 AT	10 to 50 AT	10 to 35 AT	10 to 35 AT
Operate time, inc. bounce typical	1.5 msec	1.0 msec	1.0 msec	0.6 msec	1.0 msec	0.8 msec
Release time typical	0.1 msec	0.1 msec	0.1 msec	0.1 msec	0.1 msec	0.1 msec
Resonant Frequency	3.2 kHz	3.2 kHz	3.0 kHz	3.0 kHz	2.2 kHz	2.2 kHz
Vibration, 10-2000Hz maximum	30 G	50 G	30 G	50 G	30 G	40 G
Shock, 11-ms. ½ sine wave maximum	100 G	100 G	100 G	100 G	100 G	100 G
Operating temperature	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C	-40°C to +125°C
Storage temperature	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C	-50°C to +155°C

## TS501

- Commercial grade reed switch for cost sensitive applications.

### Physical Characteristics:

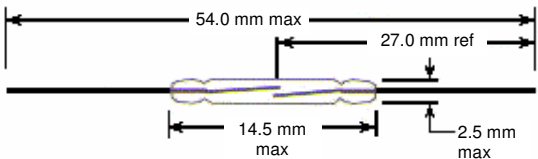

Glass Diameter (Max.)	2.5mm
Glass Length (Max.)	14.5mm
Lead Dia. (Nominal)	0.45mm
Overall Length (Max.)	54.0mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Noble metal
Power Rating <sup>1</sup>	7 VA maximum
Switching Current (Max.)	0.3 Amp. DC, 0.3 Amp. AC
Carry Current (Max.)	0.5 Amp. DC, 0.5 Amp. AC
Switching Voltage (Max.)	50 VDC, 75 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	150 Volts DC
Contact Resistance <sup>3</sup>	250 Milliohms
Insulation Resistance (Min.)	10 <sup>9</sup> ohms
Contact Capacitance (pf Max.)	0.3 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.
2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.
3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:


Voltage	12 VDC	75 VDC
Current	10 mA	100 mA
Life	> 2 million	> 1 million

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	10 to 30 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	20 to 98% of Pull-In
Operate Time, including bounce (typ.)	1.5 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	30 G
Shock, 11-ms. ½ Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

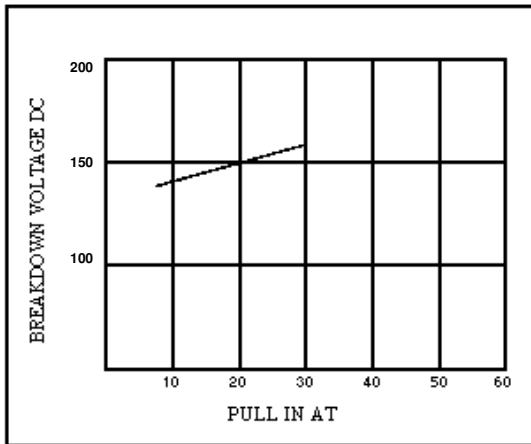


Breakdown Voltage Plotted Against Pull-In Ampere Turns

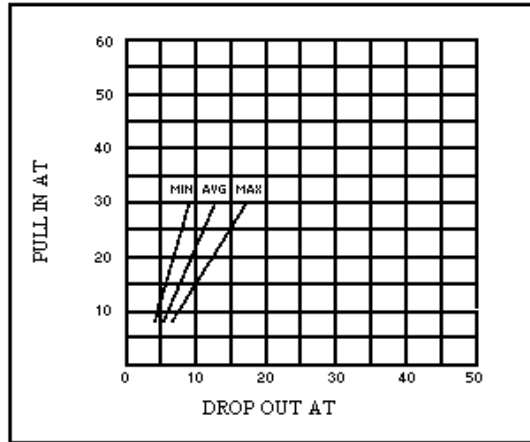

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

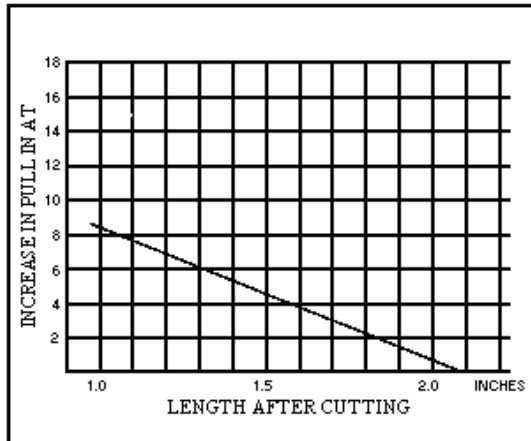

Change In Pull-In Ampere Turns After Switch Lead Cutting

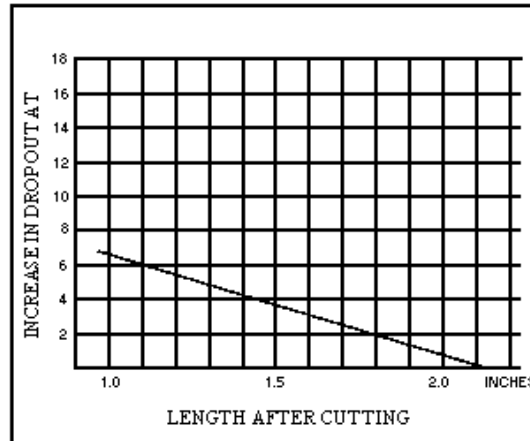

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

**www.StandexElectronics.com**

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779


Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86

## TR501

➤ Commercial grade general-purpose miniature reed switch.

### Physical Characteristics:

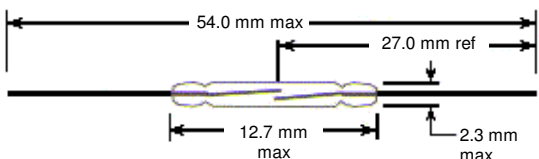

Glass Diameter (Max.)	2.3mm
Glass Length (Max.)	12.7mm
Lead Dia. (Nominal)	0.45 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Noble metal
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	0.5 Amp. DC, 0.5 Amp. AC
Carry Current (Max.)	0.8 Amp. DC, 0.8 Amp. AC
Switching Voltage (Max.)	100 VDC, 125 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	200 Volts DC
Contact Resistance <sup>3</sup>	200 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.3 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.
2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes
3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch;


Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA
Life	50 x 10 <sup>6</sup>	0.25 x 10 <sup>6</sup>	5 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	0.25 x 10 <sup>6</sup>	0.25 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	7 to 30 Ampere Turns
Magnetic Sensitivity (Range - Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	1.0 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

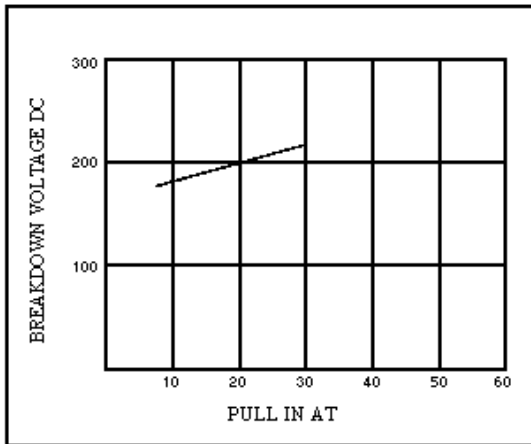


Breakdown Voltage Plotted Against Pull-In Ampere Turns

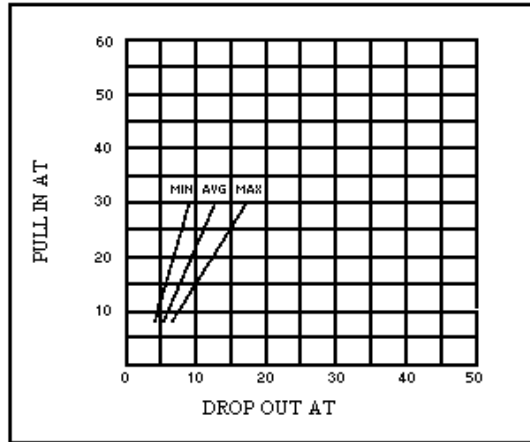

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

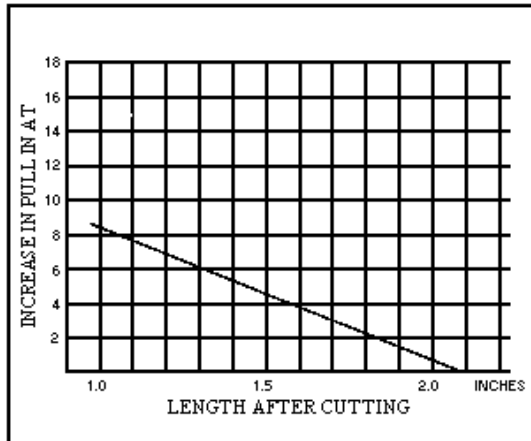

Change In Pull-In Ampere Turns After Switch Lead Cutting

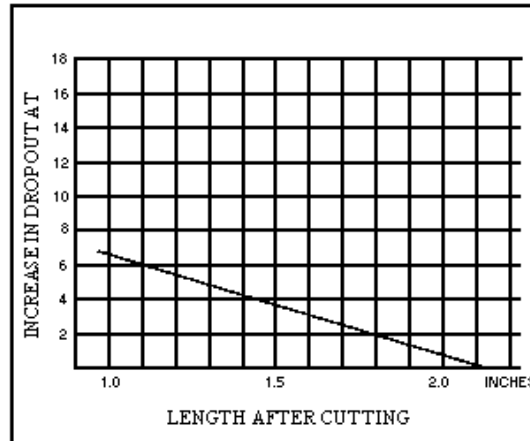

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

**[www.StandexElectronics.com](http://www.StandexElectronics.com)**

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779


Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

Tianjin, China  
Tel: +86 22 86 99 68 81~5  
Fax: +86 22 86 99 68 86

## TS560

➤ Commercial grade reed switch for cost sensitive applications

### Physical Characteristics:

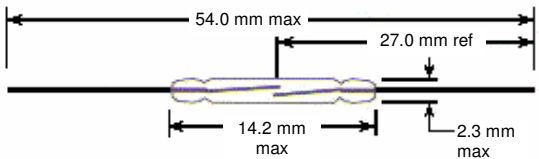

Glass Diameter (Max.)	2.3mm
Glass Length (Max.)	14.2mm
Lead Dia. (Nominal)	0.6 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Noble Metal
Power Rating <sup>1</sup>	8VA maximum
Switching Current (Max.)	0.5 Amp. DC, 0.5 Amp. AC
Carry Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Switching Voltage (Max.)	75 VDC, 100 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	150 Volts DC
Contact Resistance <sup>3</sup>	250 Milliohms
Insulation Resistance (Min.)	10 <sup>9</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf

- The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.
- Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.
- Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:

Voltage	12 VDC	75 VDC
Current	10 mA	100 mA
Life	> 2 million	> 1 million

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


<b>© Standex Electronics Inc.</b>		<b>www.StandexElectronics.com</b>
Cincinnati, Ohio USA Phone +513 871 3777 Fax +513 871 3779	Tonbridge, United Kingdom Phone +44 1732 77 10 23 Fax +44 1732 77 01 22	Tianjin, China Tel: +86 22 86 99 68 81~5 Fax: +86 22 86 99 68 86




## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	10 to 35 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	20 to 98% of Pull-In
Operate Time, including bounce (typ.)	1.0 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.0 kHz
Vibration, 10-2,000 Hz (G's Max.)	30 G
Shock, 11-ms. ½ Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

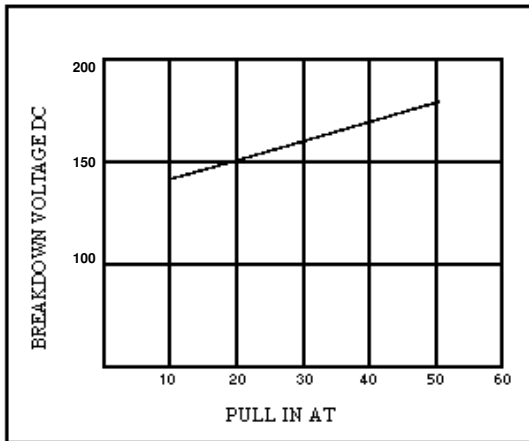


Breakdown Voltage Plotted Against Pull-In Ampere Turns

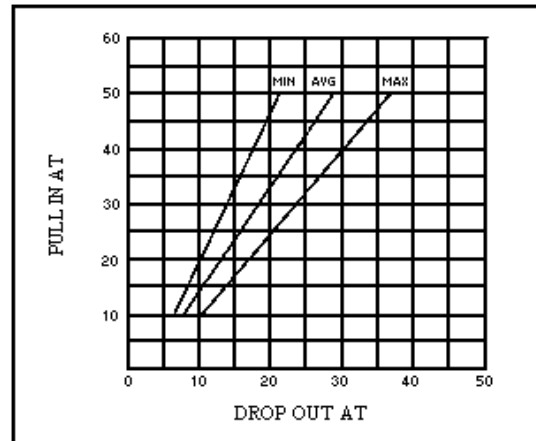

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

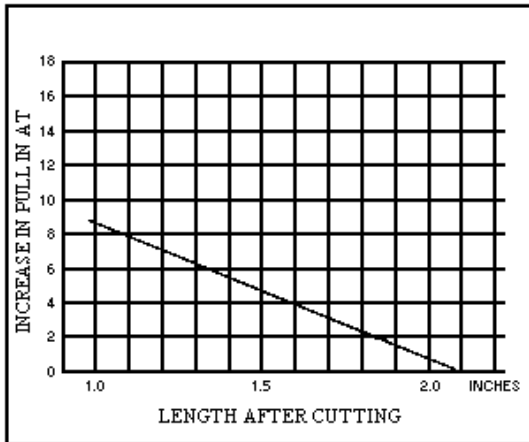

Change In Pull-In Ampere Turns After Switch Lead Cutting

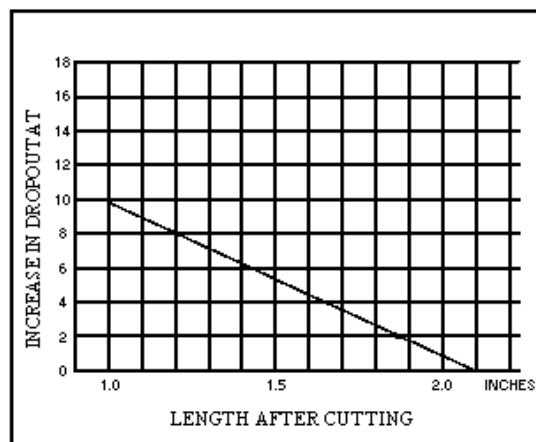


Change In Drop-Out Ampere Turns After Switch Lead Cutting

<b>© Standex Electronics Inc.</b>		<b><a href="http://www.StandexElectronics.com">www.StandexElectronics.com</a></b>
Cincinnati, Ohio USA Phone +513 871 3777 Fax +513 871 3779	Tonbridge, United Kingdom Phone +44 1732 77 10 23 Fax +44 1732 77 01 22	Tianjin, China Tel: +86 22 86 99 68 81~5 Fax: +86 22 86 99 68 86

## TR560

➤ Commercial grade general-purpose miniature reed switch.

### Physical Characteristics:

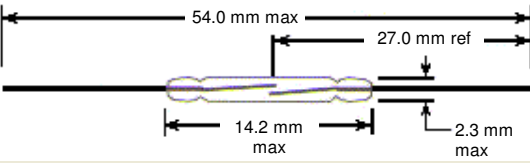

Glass Diameter (Max.)	2.3mm
Glass Length (Max.)	14.2mm
Lead Dia. (Nominal)	0.6 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Noble metal
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Carry Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Switching Voltage (Max.)	100 VDC, 125 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	200 Volts DC
Contact Resistance <sup>3</sup>	200 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf

1. The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches. Standex Electronics will run life tests specific to a customers load upon request.

2. Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.

3. Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:


Voltage	5 VDC	10 VDC	12 VDC	24 VDC	100 VDC	125 VAC
Current	2 mA	1 A	10 mA	10 mA	100 mA	80 mA
Life	50 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	50 x 10 <sup>6</sup>	2.5 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>	0.5 x 10 <sup>6</sup>

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	10 to 50 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	0.6 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.0 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. ½ Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

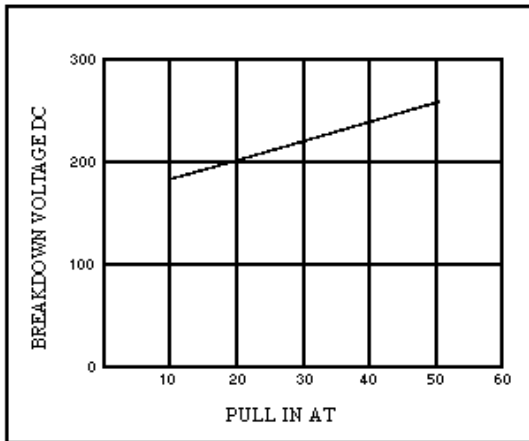


Breakdown Voltage Plotted Against Pull-In Ampere Turns

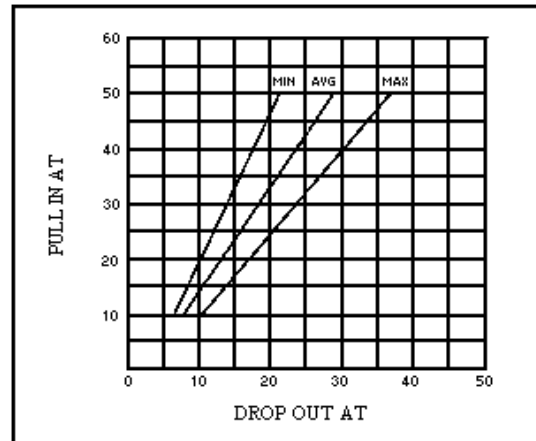

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

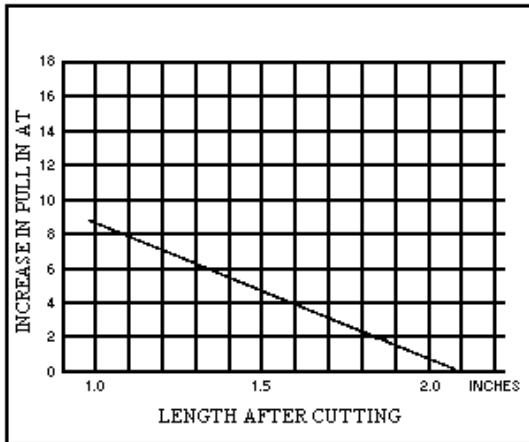

Change In Pull-In Ampere Turns After Switch Lead Cutting

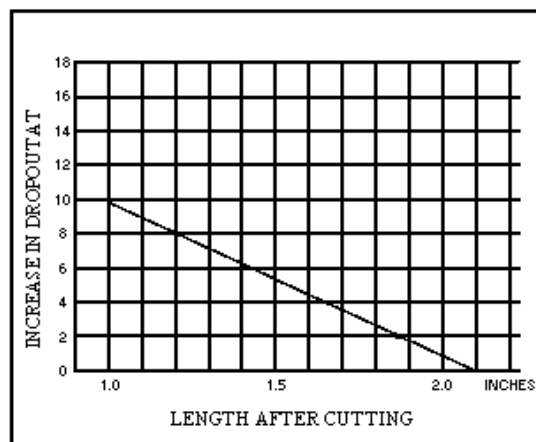


Change In Drop-Out Ampere Turns After Switch Lead Cutting

<b>© Standex Electronics Inc.</b>		<b><a href="http://www.StandexElectronics.com">www.StandexElectronics.com</a></b>
Cincinnati, Ohio USA Phone +513 871 3777 Fax +513 871 3779	Tonbridge, United Kingdom Phone +44 1732 77 10 23 Fax +44 1732 77 01 22	Tianjin, China Tel: +86 22 86 99 68 81~5 Fax: +86 22 86 99 68 86

## TS100

- Commercial grade reed switch for cost sensitive applications.

### Physical Characteristics:

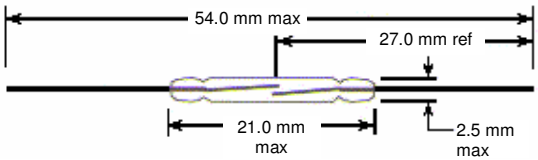

Glass Diameter (Max.)	2.5mm
Glass Length (Max.)	21.0mm
Lead Dia. (Nominal)	0.7 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Noble Metal
Power Rating <sup>1</sup>	8VA maximum
Switching Current (Max.)	0.5 Amp. DC, 0.5 Amp. AC
Carry Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Switching Voltage (Max.)	100 VDC, 125 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	200 Volts DC
Contact Resistance <sup>3</sup>	250 Milliohms
Insulation Resistance (Min.)	10 <sup>9</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf

- The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches.
- Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.
- Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:


Voltage	12 VDC	100 VDC
Current	10 mA	100 mA
Life	> 2 million	> 1 million

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	10 to 35 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	20 to 98% of Pull In
Operate Time, including bounce (typ.)	1.0 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	2.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	30 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

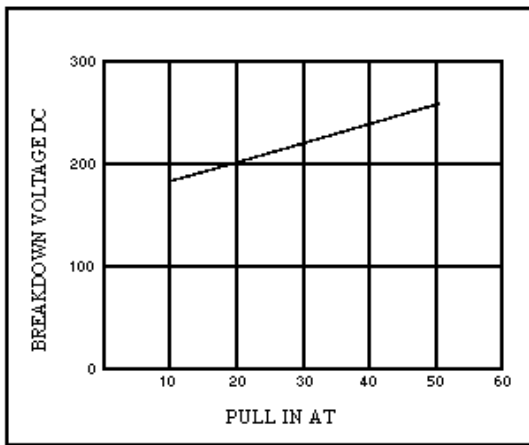


Breakdown Voltage Plotted Against Pull-In Ampere Turns

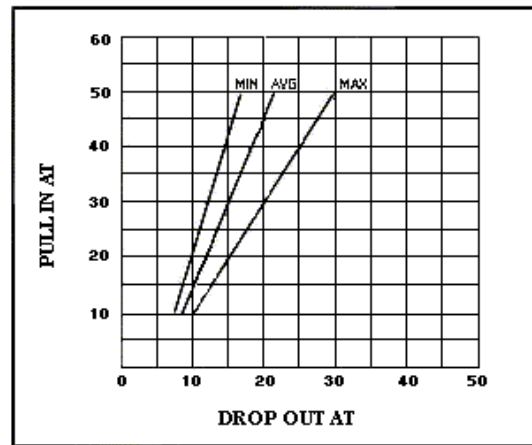

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

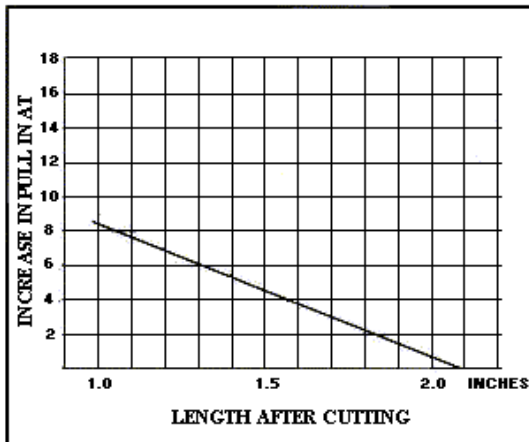

Change In Pull-In Ampere Turns After Switch Lead Cutting

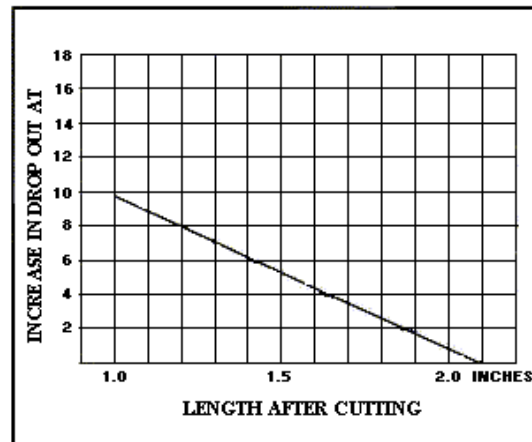

Change In Drop-Out Ampere Turns After Switch Lead Cutting

© **Standex Electronics Inc.**

**www.StandexElectronics.com**

Cincinnati, Ohio USA  
Phone +513 871 3777  
Fax +513 871 3779


Tonbridge, United Kingdom  
Phone +44 1732 77 10 23  
Fax +44 1732 77 01 22

Tianjin, China  
Tel: +86 22 86 99 68 81-5  
Fax: +86 22 86 99 68 86

## TR100

- Commercial grade general-purpose miniature reed switch.

### Physical Characteristics:

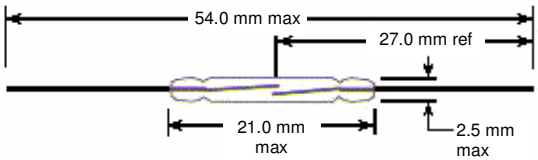

Glass Diameter (Max.)	2.5mm
Glass Length (Max.)	21.0mm
Lead Dia. (Nominal)	0.7 mm
Overall Length (Max.)	54.0 mm

### Electrical Characteristics:

Contact Arrangement	Form A (SPST), Centre Gap
Contact Material	Noble Metal
Power Rating <sup>1</sup>	10VA maximum
Switching Current (Max.)	1.0 Amp. DC, 1.0 Amp. AC
Carry Current (Max.)	1.5 Amp. DC, 1.5 Amp. AC
Switching Voltage (Max.)	100 VDC, 150 VAC
Breakdown Voltage (Min. @20AT) <sup>2</sup>	250 Volts DC
Contact Resistance <sup>3</sup>	200 Milliohms
Insulation Resistance (Min.)	10 <sup>12</sup> ohms
Contact Capacitance (pf Max.)	0.2 pf

- The specification for VA rating may sometimes be exceeded for less sensitive (higher AT) switches, and should be decreased for very sensitive (lower AT) switches.
- Breakdown voltage is measured in the presence of an ionising source. Switch leakage current is limited to 100 microamperes.
- Contact resistance measurements are made at 10ma from a 1-volt source, with 50% overdrive, using a 4-wire (Kelvin) measuring system. Contact probes are located on 43 mm centres.

### Minimum Switching Life with Standard Test Loads, using 20AT switch:


Voltage	12 VDC	100 VDC
Current	10 mA	100 mA
Life	> 2 million	> 1 million

Note: End of life is defined as contact resistance exceeding one ohm and/or failure to operate.


## Operating Characteristics:

Magnetic Sensitivity (Range - Pull In)	10 to 35 Ampere Turns
Magnetic Sensitivity (Range – Drop Out)	20 to 98% of Pull In
Operate Time, including bounce (typ.)	0.8 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	2.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	40 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


## Charts:

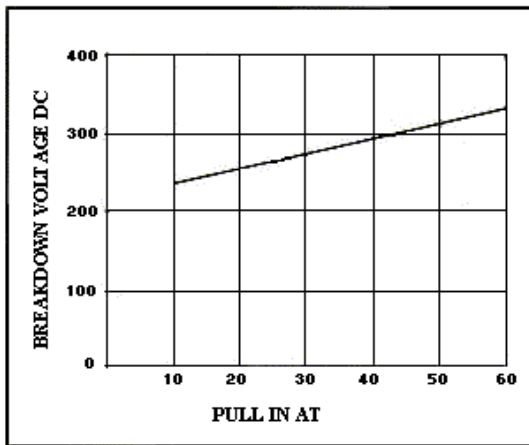


Breakdown Voltage Plotted Against Pull-In Ampere Turns

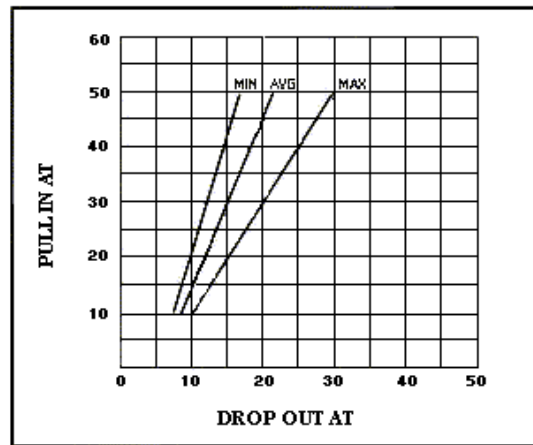

Pull-In Ampere Turns Plotted Against Drop-Out Ampere Turns

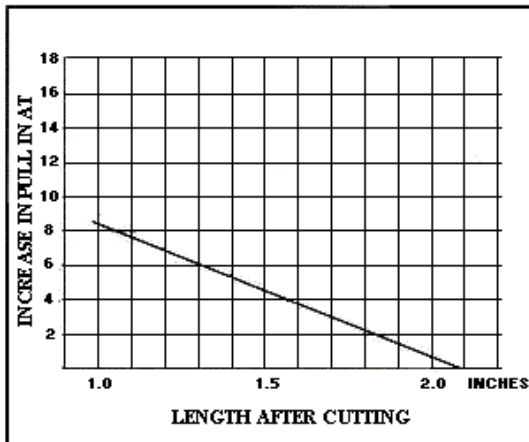

Change In Pull-In Ampere Turns After Switch Lead Cutting

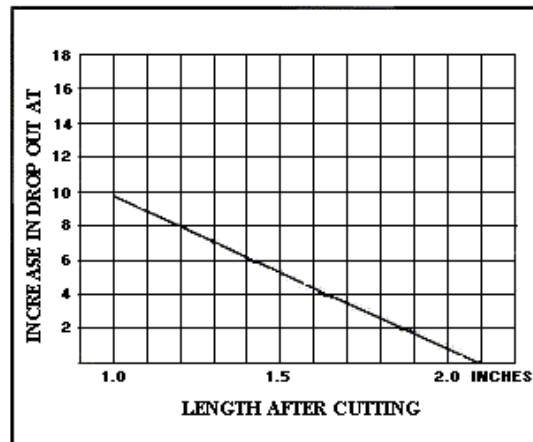


Change In Drop-Out Ampere Turns After Switch Lead Cutting


<b>© Standex Electronics Inc.</b>			<b>www.StandexElectronics.com</b>		
Cincinnati, Ohio USA	Tonbridge, United Kingdom	Tianjin, China			
Phone +513 871 3777	Phone +44 1732 77 10 23	Tel: +86 22 86 99 68 81-5			
Fax +513 871 3779	Fax +44 1732 77 01 22	Fax: +86 22 86 99 68 86			

## Reed switch structure and operation:

The form A reed switch comprises of two ferromagnetic reeds placed with a gap in-between and hermetically sealed in a glass tube. The glass tube is filled with an inert gas, (nitrogen), or a vacuum to prevent the oxidation of the contacts. The surfaces of the reed contacts are plated with metals from the platinum group such as rhodium, ruthenium, palladium or iridium either by electroplating or sputtering.

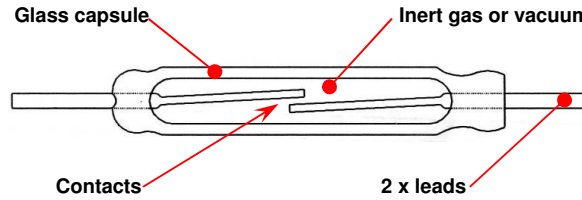


The reed switch is operated by the magnetic field of an energised coil or a permanent magnet which induces north (N) and south (S) poles on the reeds. The reed contacts are closed by this magnetic attractive force. When the magnetic field is removed, the reed elasticity causes the contacts to open the circuit

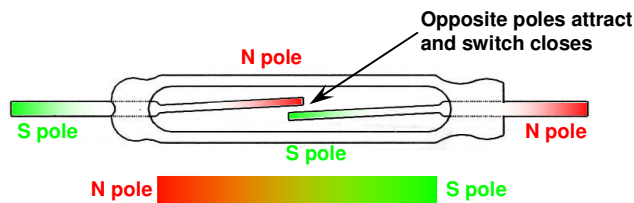


## Reed switch actuation:

In all systems, magnet and reed switch must be brought to within a specific proximity of each other. This distance will vary in accordance with the sensitivity of the reed switch, the amount of lead that is cropped and the strength of the magnet. As the lead is cut the switch sensitivity decreases as there is less ferro-magnetic material to attract the magnet flux. When the magnet is close enough, the normally open contacts will close, when the magnet is removed the contacts will open. The relative distance for operation is always less than that for a release. Examples of proximity motion switching are shown below:

Provides only one closure with maximum magnet travel:

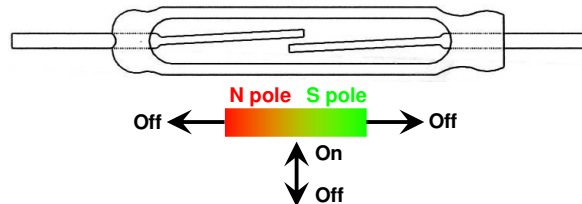


Provides as many as three closures with maximum magnet travel:

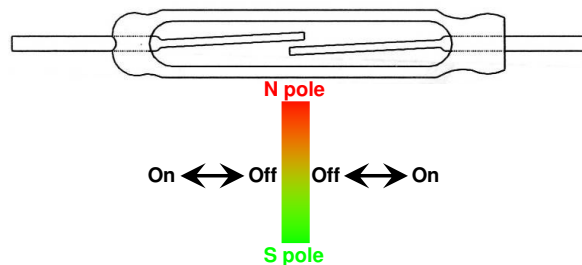





Ring magnet actuation allows one closure with minimum magnet travel.

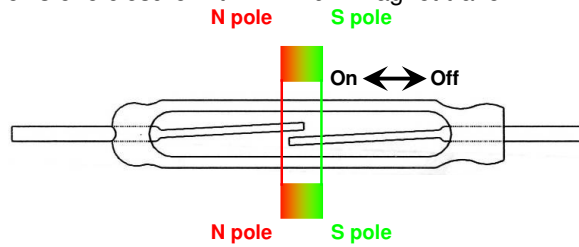


Large angular magnet travel necessary to achieve one switch closure.

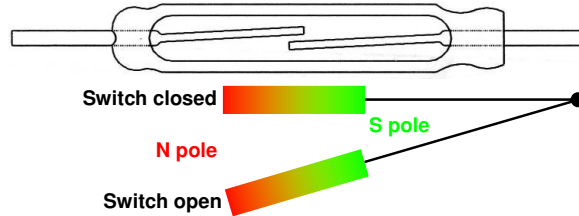


Rotating the magnet or reed switch, normal to their axes, reverses magnetic polarity resulting in two closures per revolution. When these axes are parallel, the switch closes. When the axes are perpendicular, the switch opens. Although the poles reverse, they still induce the opposite poles that close the reed switch.

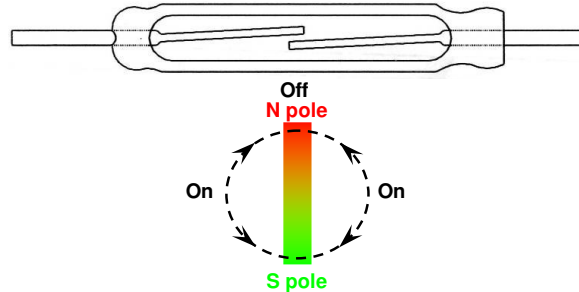

A biasing effect is produced by placing a stationary magnet near the reed switch, to keep it normally closed. The approach of another magnet with reversed polarity cancels the magnetic lines of force, and the reed switch opens. Care should be taken not to bring the actuating magnet too close to the biased reed switch, as it could close again. The same effect can be achieved using only two leads of a form C switch.

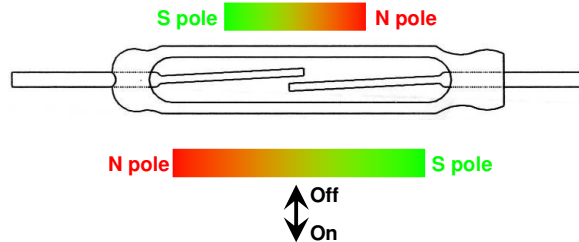

In this type of actuation, magnet and reed switch are permanently fixed in such a position that the reed switch contacts are closed. A piece of ferromagnetic material is passed between the magnet and the reed switch, to cause drop out. The magnetic field is shunted, eliminating the attraction between the reeds. When the shield is removed, the reed switch closes.

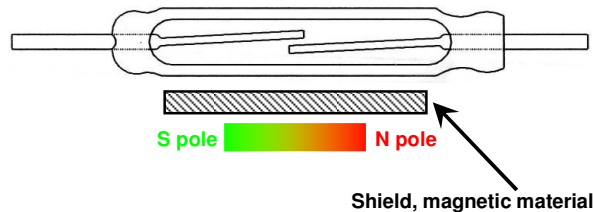

## Typical applications for reed switches are:

- Proximity sensors.
- General fluid level sensors including the following automotive specific applications:
  - Brake fluid level.
  - Windscreen washer fluid level.
  - Engine coolant fluid level.
- Flow sensors.
- Reed relays.
- Pedometers.
- Bicycle computers.
- Exercise machines.
- Gas, water and electricity meters.
- Rice cookers.
- Security, (door and window contacts).
- Electric toothbrushes.
- Humidifiers.

## Glossary:

### Ampere Turn (AT):

The product of the number of turns of wire in an electromagnetic coil winding and the current in amperes passing through the winding. This is a direct measure of the magnetic field generated, and of a reed contact's sensitivity.

### Bounce:

Intermittent opening and closing of closed contacts or closing and opening of open contacts, usually implying the motion resulting from contact impact.

### Bounce Time (in milliseconds):

Time taken for a bounce.

### Breakdown Voltage:

The voltage which may be applied between insulated parts of a reed contact without damage, arcing, breakdown, or causing excessive leakage.

### Carry Current (in Amps):

The maximum current that can be applied to an already closed contact.

### Contact Rating (in Watts):

The maximum power, a reed contact can switch.

### Contact Resistance (CR):

The electrical resistance of closed contacts.

### Curie temperature:

Temperature at which a magnet is totally demagnetized.

### Differential:

The difference between operate AT and release AT often expressed as %.

### Drop Out (DO):

See Release AT.

### Form A:

A normally open type of reed contact.

### Form B:

A normally closed type of reed contact.

### Form C:

A change-over type of reed contact where break happens before make.

### Form D:

A change-over type of reed contact where make happens before break.

### Form E:

A latching, or bi-stable type of contact, which stays in the last energised state, without the need for maintaining the field.

**Hysteresis:**  
See differential.

**Insulation Resistance:**  
The electrical resistance measured between insulated terminals.

**Omni-polar:**  
A type of device that will function with either pole of a magnet.

**Operate AT (OAT):**  
The measured value, in AT, at which a reed contact closes. This is valid for the closing operation of form A, B, and E type reed contacts and the change over operation from the normally closed contact to the normally open contact for form C and D type reed contacts.

**Operating Temperature:**  
The temperature range over which the reed contact will meet all specified operating parameters.

**Operate Time:**  
The time interval from coil energisation, to the closing of the reed contact. Where not otherwise stated, the functioning time of the reed contact in question is taken as its initial functioning time, not including contact bounce.

**Over-drive (in AT):**  
The AT given above OAT, before measurement of CR.

**Pull In (PI):**  
See Operate AT.

**Release AT (RAT):**  
The measured value, in AT, at which a reed contact opens. This is valid for the opening of form A, B, and E type reed contacts, and the change over from the closed normally open contact to the open normally closed contact for form C and D type contacts.

**Release Time:**  
The time interval from coil de-energisation to the opening or change over of the reed contact. Where not otherwise stated, the functioning time of the reed contact in question is taken as its initial functioning time, not including contact bounce.

**Resonance Frequency (in Hz):**  
The frequency where a reed contact will chatter, or starts sympathetic vibration.

**Saturation:**  
Magnetic saturation exists when an increase of magnetisation applied to a reed contact does not increase the magnetic flux.

**Switching Voltage (in Volts):**  
The maximum voltage a reed contact can switch.

**Switching Current (in Amps):**  
The maximum current a reed contact can switch.

**SUNSTAR商斯达实业集团**是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有10多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌IC芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。**专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）www.SENSOR-IC.COM 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到中国，共同开拓市场。**本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。**我公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专门从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。**

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达军工产品网：<http://www.junpinic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦1602室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: [SUNS888@hotmail.com](mailto:SUNS888@hotmail.com)

邮编：518033 E-mail: [szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场2583号 电话：0755-83665529

技术支持：0755-83394033 13501568376