



Electro Optical Components, Inc.

SUNSTAR传感器与控制网 <http://www.sensor-ic.com/> TEL: 0755-83376489 FAX: 0755-83376182 E-MAIL: szss20@163.com

5464 Skylane Boulevard, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com



SiC - photodiode JEC 0,3I



characteristics :

- ◆ spectral range 210 ... 380 nm
- ◆ active area 0,22 mm²
- ◆ high UV - response 0,13 A/W
- ◆ TO 39-package
- ◆ photodiode isolated to package
- ◆ components are in conformity with RoHS and WEEE

applications :

- ◆ UV-measurement only
- ◆ UV-source control (for instance in sterilizers)
- ◆ flamedetection

maximum ratings:

maximum reverse voltage	20	V
operating temperature range	- 25 °C ... 70	°C
storage temperature range	- 40 °C ... 100	°C
soldering temperature (3s)	260	°C

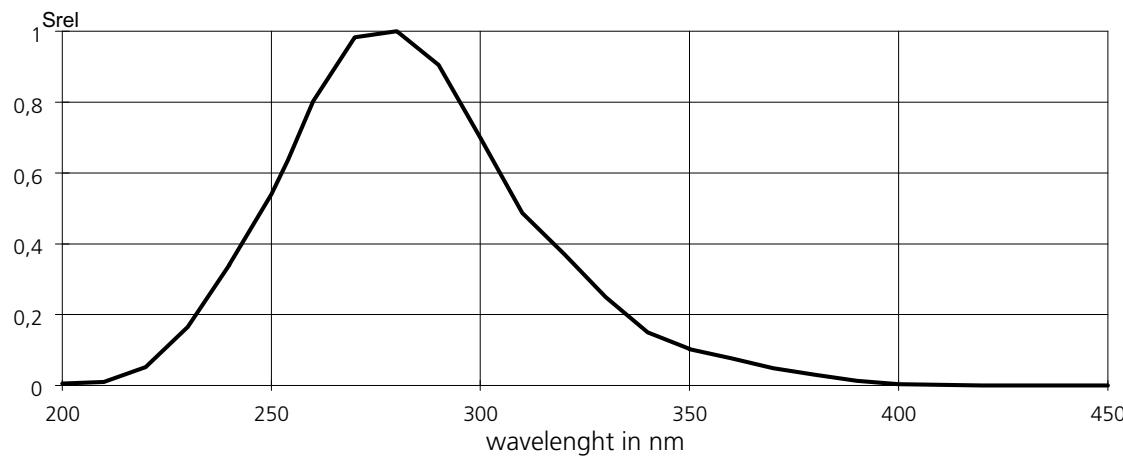
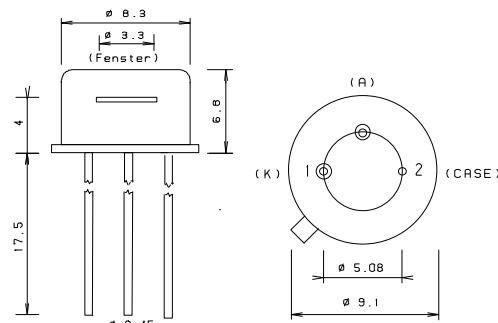
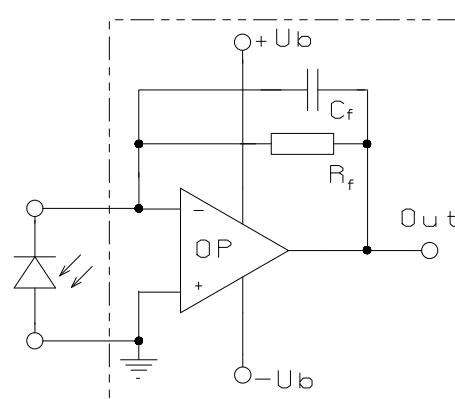
technical data :

test conditions, as not otherwise specified: $\gamma_a = 25$ °C, $V_R = 0V$

parameters	test conditions	min.	typ.	max.	unit
active area			0,5 x 0,5		mm ²
spectral range		210		380	nm
maximum of spectral responsivity	$\lambda_{max} = 275$ nm		0,13		A/W
absolute spectral responsivity	$\lambda = 254$ nm		0,11		A/W
dark current I_R	$V_R = 1$ V		5		fA
capacitance			80		pF

D
A
T
A

S
H
E
E
T

relative spectral response**package dimensions****application example**

The application example shows a typical circuit.. R_f is responsible for the gain of the circuit. C_f compensates the reverse junction capacitance of the photodiode and input capacitance of the OPV. The exact value of C_f depends on R_f , used OPV and capacitance of the circuit. A typical value is 1 pF.

The diagram shows dependence of amplitude of the application circuit with OPA 111, $R_f = 50 \text{ M}\Omega$ and $C_f = 0.5 \text{ pF}$.

