



UV - Photodetector with integrated amplifier

**JIC 137 A
JIC 138 A
JIC 139 A**


characteristics :

- ◆ integrated UV-A filter
- ◆ spectral range 315 ... 395 nm
- ◆ active area 0,22 mm²
- ◆ responsivity, decadic staggering 0,3/30 mV/nW
- ◆ extra sensor pin for external adjustment of gain and bandwidth
- ◆ single supply voltage
- ◆ sensor assembly isolated to ground
- ◆ hermetically welded TO5-metal/glass package
- ◆ components are in conformity with RoHS and WEEE

applications :

- ◆ selective UV-A-measurement
- ◆ control of sterilization lamps
- ◆ flamedetection and flamecontrol
- ◆ control of irradiancy in varnish and adhesive hardening

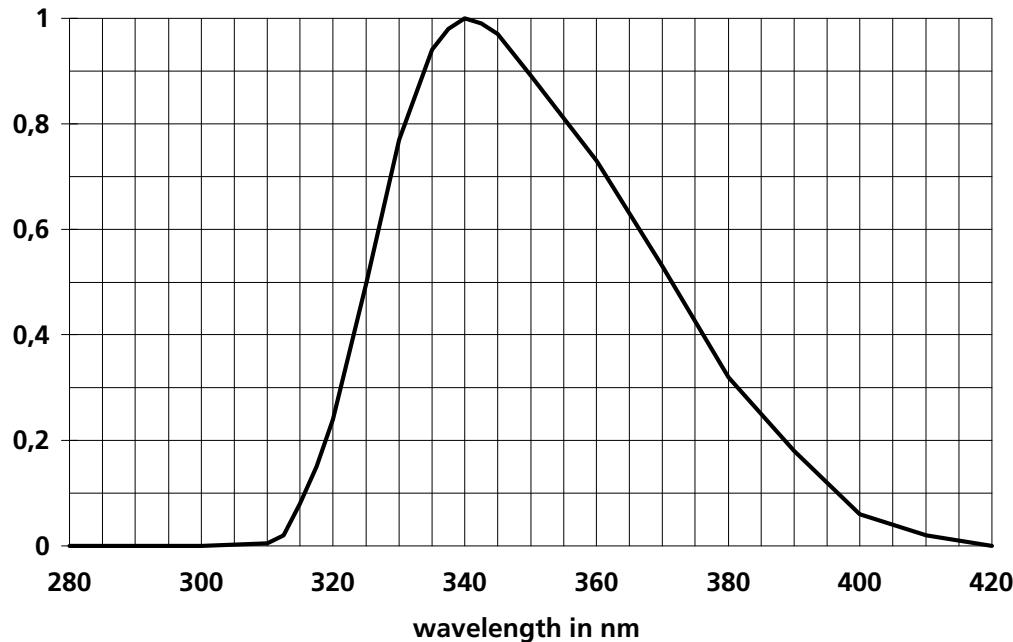
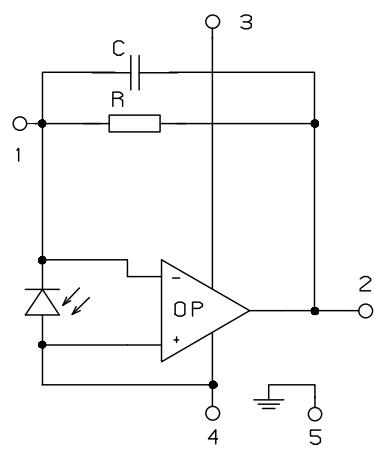
absolute maximum ratings:

supply voltage	+5,5	V
working temperature range	-25 °C ... +85	°C
storage temperature range	-40 °C ... +100	°C
welding temperature (5s)	300	°C

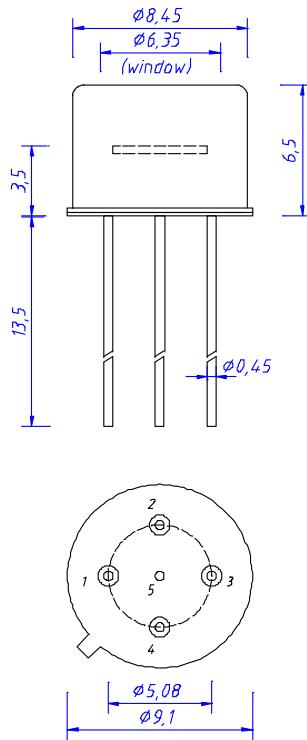
technical data :

common test conditions, as not otherwise specified: $T_A = 25 \text{ }^\circ\text{C}$, $V_S = +5 \text{ V}$
typ. values, maximum values in brackets

parameter	test condition	JIC137A	JIC138A	JIC139A	unit
feedback resistor		10	100	1.000	MΩ
dark offset voltage	$E = 0 \text{ lx}$	± 1	± 2	± 3	mV
noise voltage	$B = 1 \text{ kHz}$		1		mV _{rms}
max. spectral responsivity	$\lambda = 340 \text{ nm}$	0,3	3	30	mV/nW
risetime		30	150	600	μs
bandwidth	- 3 dB	10	2	0,5	kHz
saturation voltage	$R_L = 2 \text{ k}\Omega$	+ 4,95 (+ 4,8)			V
short current		± 50			mA
supply voltage		+ 2,7...+ 5			V
current consumption		750 (1100)			μA

relative spectral responsivity**pin configuration**

1 R_f
 2 Out
 3 V_s
 4 GND
 5 Case

package dimension**application hints:**

- If an external resistor for reduction of gain is used, please make sure that length of connectors is as short as possible to reduce noise and capacitive interference.
- If internally adjusted gain is used only, please cut pin „1“.