



HF-Performer III for PL-L lamps

HF-P 136 PL-L III 220-240V 50/60Hz

HF-Performer III PL-T/C is a sustainable, slim and high-frequency electronic ballast for PL-L fluorescent lamps. It is ideal for applications where high energy efficiency is required. The HF-Performer III range has a robust design, meets all relevant international safety and performance standards and is energy efficient (CELMA EEI A2 BAT).

Product data

• General Characteristics

Application code	III
Rated Lamptype	PL-L
Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	36
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 280x30x28
Energy Efficiency Index	A2 BAT
Lifetime 90% surv.@Tcaselife	50000 hr
Ignition Method	Warm Start

• Operating Characteristics

Automatic restart	Yes
Preheat time	0.5 s
Ignition time	1.2 (max) s
Operating frequency	45 kHz
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
Inrush current Peak	18 (max) A
Inrush current Width	0.25 ms
Earth leakage current	0.5 mA
Power losses gear	3.0-5.0 W
Constant wattage deviation	-2%/+2%
Ballast Lumen Factor	1.00 -
PowerFactor 100% output power	0.95 -
Battery voltage lamp ignition	186-275 V

Battery voltage running lamps	176-275
Overvoltage protection 320Vac	48 hr
Overvoltage protection 350Vac	2 hr
Max ballast on MCB(16A type B)	28 x
Crestfactor	1.7 (max) -
Hum and Noise level	< 30 dB(A)
Total Harmonic Distortion EUR	7.31 %

• Wiring Characteristics

Cable-Cap output-wires to earth	200 pF
Cable-Cap output-wires mutual	200 pF
Conn.type input terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Conn.type output terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Max. cable length	0.75 m
Hot Wires	
Striplength	8.0-9.0 mm
Dual fixture Master/Slave	Not applicable [Master/Slave oper. not applicable]
Wcs Input terminals	0.50-1.50 mm ²
Wcs Output terminals	0.50-1.50 mm ²

• Temperature Characteristics

T-case life	70 C
-------------	------



asimpleswitch.com

PHILIPS

HF-Performer III for PL-L lamps

T-case maximum	70 (max) C
T-ignition	-25 (min), 50 (max) C
T-ambient	-25 (min), 50 (max) C
T-storage	-40 (min), 50 (max) C

Safety Standard	IEC 61347-2-3
Performance Standard	IEC 60929
Quality Standard	ISO 9000:2000
Environmental Standard	ISO 14001
Harmonic current emissions	IEC 61000-3-2
EMC Immunity	IEC 61547
Vibrations	IEC 60068-2-6 Fc
Bumps	IEC 60068-2-29 Eb
Humidity	EN 61347-2-3 clause 11
Approval marks	ENEC / VDE-EMV
CE marking	Yes
Temperature marking	110 [Yes]
Emergency standard	IEC 60598-2-22

• Emergency Characteristics

Bal Lm Fac Emergency operation	0.7 -
Light output after 5 sec	50% of EBLF
Light output after 60 sec	100% of EBLF
Normal operating voltage (DC)	220-240 V
Batt volt guaranteed ignition	186-275 V
Batt volt guaranteed operation	176-275 V

• Product Dimensions

Length A1	280.0 mm
Fixing Hole Distance	265.0 mm
Length A2	
Width B1	30.0 mm
Height C1	28.0 mm
Fixing Hole Diameter D1	4.2 mm


• Approval & Application Chars

EMI 9kHz .. 30 MHz	EN 55015 edition 7.1
EMI 30 MHz .. 1000MHz	- [Not specified]

• Product Data

Order code	913713028466
Full product code	913713028466
Full product name	HF-P 136 PL-L III 220-240V 50/60Hz
Order product name	HF-P 136 PL-L III 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900951912
Bar code on outerbox - EAN3	8727900951929
Logistic code(s) - 12NC	913713028466
Net weight per piece	0.210 kg

Dimensional drawing

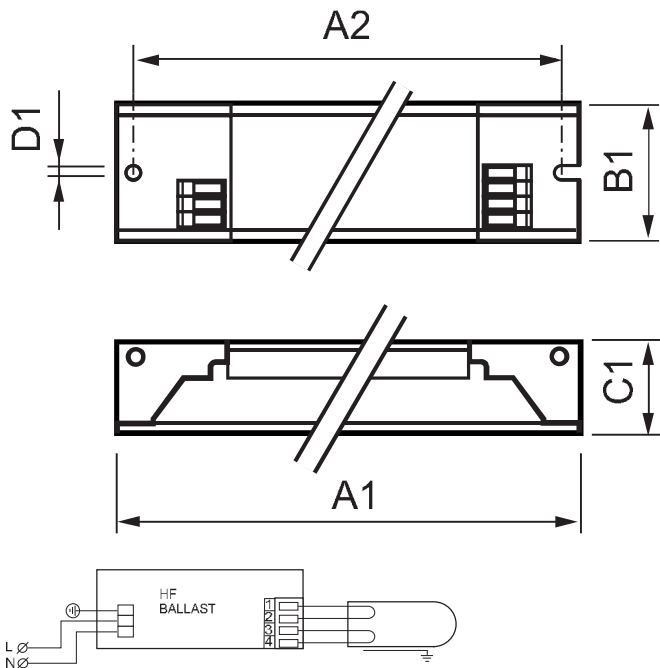

HF-P 136 PL-L III 220-240V 50/60Hz

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-P 136 PL-L III 220-240V 50/60Hz	280.0	265.0	30.0	28.0	4.2

Photometric data

Ballast type	Lamp type	Lamp power	Ta = 40°C	Ta = 50°C	Ta = 60°C	Remarks
			Tc	Tc	Tc	
HF-P 136 PL-L III 220-240V 50/60Hz	PL-L	36W	148°C	158°C	168°C	75°C
			100,000 Hrs	100,000 Hrs	100,000 Hrs	50,000 Hrs

HF-P 136 PL-L III

HF-Performer III for PL-L lamps



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 12
data subject to change