




**Datasheet**

**HCA-100M-50K-C**

**High Speed Current Amplifier**

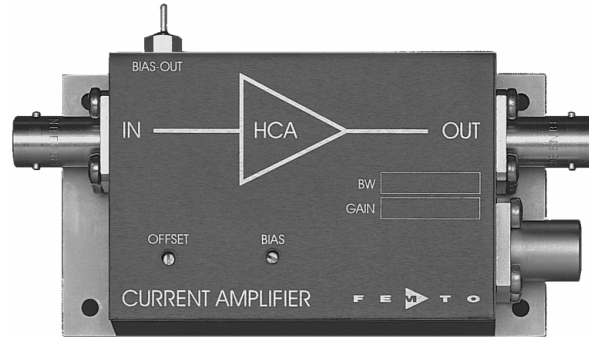

Features	<ul style="list-style-type: none"> <li>• <b>Bandwidth DC ... 100 MHz</b></li> <li>• <b>Transimpedance (Gain) <math>5 \times 10^4</math> V/A</b></li> <li>• <b>Suitable for High Source Capacitance up to 20 pF</b></li> <li>• <b>Low Equivalent Input Noise Current of <math>3.8 \text{ pA}/\sqrt{\text{Hz}}</math></b></li> </ul>																																																																						
Applications	<ul style="list-style-type: none"> <li>• <b>Photodiode and Photomultiplier Amplifier</b></li> <li>• <b>Spectroscopy</b></li> <li>• <b>Charge Amplifier</b></li> <li>• <b>Ionisation Detectors</b></li> <li>• <b>Preamplifier for Lock-Ins, A/D Converters, etc.</b></li> </ul>																																																																						
Specifications	<p><i>Test Conditions</i> <span style="float: right;"><math>V_s = \pm 15 \text{ V}, T_a = 25^\circ\text{C}</math></span></p> <table border="0"> <tr> <td style="vertical-align: top;">Gain</td> <td>Transimpedance</td> <td><math>5 \times 10^4 \text{ V/A}</math> (@ <math>50 \Omega</math> load)</td> </tr> <tr> <td></td> <td>Gain Accuracy</td> <td><math>\pm 2 \%</math></td> </tr> <tr> <td style="vertical-align: top;">Frequency Response</td> <td>Lower Cut-Off Frequency</td> <td>DC</td> </tr> <tr> <td></td> <td>Upper Cut-Off Frequency (- 3 dB)</td> <td>100 MHz (<math>\pm 10 \%</math>, @ Csource 2 to 10 pF)</td> </tr> <tr> <td></td> <td></td> <td>80 MHz (<math>\pm 10 \%</math>, @ Csource 11 to 20 pF)</td> </tr> <tr> <td></td> <td>Max. Source Capacitance</td> <td>20 pF (incl. cable, e.g. typical coax cable 1 pF/cm)</td> </tr> <tr> <td></td> <td>Rise / Fall Time (10 % - 90 %)</td> <td>3.4 ns (@ Csource 2 to 10 pF)</td> </tr> <tr> <td></td> <td></td> <td>4.0 ns (@ Csource 11 to 20 pF)</td> </tr> <tr> <td></td> <td>Gain Flatness</td> <td><math>\pm 0.3 \text{ dB}</math></td> </tr> <tr> <td style="vertical-align: top;">Input</td> <td>Equ. Input Noise Current</td> <td><math>3.8 \text{ pA}/\sqrt{\text{Hz}}</math> (@ 10 MHz)</td> </tr> <tr> <td></td> <td>Equ. Input Noise Voltage</td> <td><math>0.9 \text{ nV}/\sqrt{\text{Hz}}</math> (@ 10 MHz)</td> </tr> <tr> <td></td> <td>Equ. Integrated Noise</td> <td>0.6 <math>\mu\text{A}</math> peak-peak</td> </tr> <tr> <td></td> <td>Input Bias Current</td> <td>12 <math>\mu\text{A}</math> typ.</td> </tr> <tr> <td></td> <td>Input Bias Current Drift</td> <td>3 nA / <math>^\circ\text{C}</math></td> </tr> <tr> <td></td> <td>Offset Current Compensation</td> <td><math>\pm 40 \mu\text{A}</math> adjustable by offset trimpot</td> </tr> <tr> <td></td> <td>Input Current Range</td> <td><math>\pm 30 \mu\text{A}</math> (for linear amplification)</td> </tr> <tr> <td></td> <td>Input Offset Voltage</td> <td>&lt; 1 mV</td> </tr> <tr> <td></td> <td>DC Input Impedance</td> <td><math>56 \Omega</math> (virtual) // 5 pF</td> </tr> <tr> <td style="vertical-align: top;">Output</td> <td>Output Voltage Range</td> <td><math>\pm 1.5 \text{ V}</math> (@ <math>50 \Omega</math> load) for linear operation and low harmonic distortion</td> </tr> <tr> <td></td> <td>Max. Output Voltage Range</td> <td><math>\pm 1.7 \text{ V}</math> (@ <math>50 \Omega</math> load)</td> </tr> <tr> <td></td> <td>Output Impedance</td> <td><math>50 \Omega</math> (terminate with <math>50 \Omega</math> load for best performance)</td> </tr> <tr> <td style="vertical-align: top;">Bias Output</td> <td>Bias Output Voltage Range</td> <td><math>\pm 12 \text{ V}</math>, adjustable by bias trimpot</td> </tr> <tr> <td></td> <td>Bias Output Impedance</td> <td><math>10 \text{ k}\Omega</math> // 1 <math>\mu\text{F}</math></td> </tr> </table>		Gain	Transimpedance	$5 \times 10^4 \text{ V/A}$ (@ $50 \Omega$ load)		Gain Accuracy	$\pm 2 \%$	Frequency Response	Lower Cut-Off Frequency	DC		Upper Cut-Off Frequency (- 3 dB)	100 MHz ( $\pm 10 \%$ , @ Csource 2 to 10 pF)			80 MHz ( $\pm 10 \%$ , @ Csource 11 to 20 pF)		Max. Source Capacitance	20 pF (incl. cable, e.g. typical coax cable 1 pF/cm)		Rise / Fall Time (10 % - 90 %)	3.4 ns (@ Csource 2 to 10 pF)			4.0 ns (@ Csource 11 to 20 pF)		Gain Flatness	$\pm 0.3 \text{ dB}$	Input	Equ. Input Noise Current	$3.8 \text{ pA}/\sqrt{\text{Hz}}$ (@ 10 MHz)		Equ. Input Noise Voltage	$0.9 \text{ nV}/\sqrt{\text{Hz}}$ (@ 10 MHz)		Equ. Integrated Noise	0.6 $\mu\text{A}$ peak-peak		Input Bias Current	12 $\mu\text{A}$ typ.		Input Bias Current Drift	3 nA / $^\circ\text{C}$		Offset Current Compensation	$\pm 40 \mu\text{A}$ adjustable by offset trimpot		Input Current Range	$\pm 30 \mu\text{A}$ (for linear amplification)		Input Offset Voltage	< 1 mV		DC Input Impedance	$56 \Omega$ (virtual) // 5 pF	Output	Output Voltage Range	$\pm 1.5 \text{ V}$ (@ $50 \Omega$ load) for linear operation and low harmonic distortion		Max. Output Voltage Range	$\pm 1.7 \text{ V}$ (@ $50 \Omega$ load)		Output Impedance	$50 \Omega$ (terminate with $50 \Omega$ load for best performance)	Bias Output	Bias Output Voltage Range	$\pm 12 \text{ V}$ , adjustable by bias trimpot		Bias Output Impedance	$10 \text{ k}\Omega$ // 1 $\mu\text{F}$
Gain	Transimpedance	$5 \times 10^4 \text{ V/A}$ (@ $50 \Omega$ load)																																																																					
	Gain Accuracy	$\pm 2 \%$																																																																					
Frequency Response	Lower Cut-Off Frequency	DC																																																																					
	Upper Cut-Off Frequency (- 3 dB)	100 MHz ( $\pm 10 \%$ , @ Csource 2 to 10 pF)																																																																					
		80 MHz ( $\pm 10 \%$ , @ Csource 11 to 20 pF)																																																																					
	Max. Source Capacitance	20 pF (incl. cable, e.g. typical coax cable 1 pF/cm)																																																																					
	Rise / Fall Time (10 % - 90 %)	3.4 ns (@ Csource 2 to 10 pF)																																																																					
		4.0 ns (@ Csource 11 to 20 pF)																																																																					
	Gain Flatness	$\pm 0.3 \text{ dB}$																																																																					
Input	Equ. Input Noise Current	$3.8 \text{ pA}/\sqrt{\text{Hz}}$ (@ 10 MHz)																																																																					
	Equ. Input Noise Voltage	$0.9 \text{ nV}/\sqrt{\text{Hz}}$ (@ 10 MHz)																																																																					
	Equ. Integrated Noise	0.6 $\mu\text{A}$ peak-peak																																																																					
	Input Bias Current	12 $\mu\text{A}$ typ.																																																																					
	Input Bias Current Drift	3 nA / $^\circ\text{C}$																																																																					
	Offset Current Compensation	$\pm 40 \mu\text{A}$ adjustable by offset trimpot																																																																					
	Input Current Range	$\pm 30 \mu\text{A}$ (for linear amplification)																																																																					
	Input Offset Voltage	< 1 mV																																																																					
	DC Input Impedance	$56 \Omega$ (virtual) // 5 pF																																																																					
Output	Output Voltage Range	$\pm 1.5 \text{ V}$ (@ $50 \Omega$ load) for linear operation and low harmonic distortion																																																																					
	Max. Output Voltage Range	$\pm 1.7 \text{ V}$ (@ $50 \Omega$ load)																																																																					
	Output Impedance	$50 \Omega$ (terminate with $50 \Omega$ load for best performance)																																																																					
Bias Output	Bias Output Voltage Range	$\pm 12 \text{ V}$ , adjustable by bias trimpot																																																																					
	Bias Output Impedance	$10 \text{ k}\Omega$ // 1 $\mu\text{F}$																																																																					

# Datasheet



# HCA-100M-50K-C

## High Speed Current Amplifier

Specifications (continued)		
Power Supply	Supply Voltage	$\pm 15\text{ V}$
	Supply Current	$\pm 50\text{ mA typ.}$ (depends on operating conditions, recommended power supply capability minimum $\pm 150\text{ mA}$ )
Case	Weight	210 g (0.5 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature	$-40 \dots +100\text{ }^\circ\text{C}$
	Operating Temperature	$0 \dots +60\text{ }^\circ\text{C}$

Absolute Maximum Ratings	Input Voltage	$\pm 5\text{ V}$
	Power Supply Voltage	$\pm 22\text{ V}$

Connectors	Input	BNC
	Output	BNC
	Power Supply	LEMO series 1S, 3-pin fixed socket
	Pin 1:	+ 15V
	Pin 2:	- 15V
	Pin 3:	GND

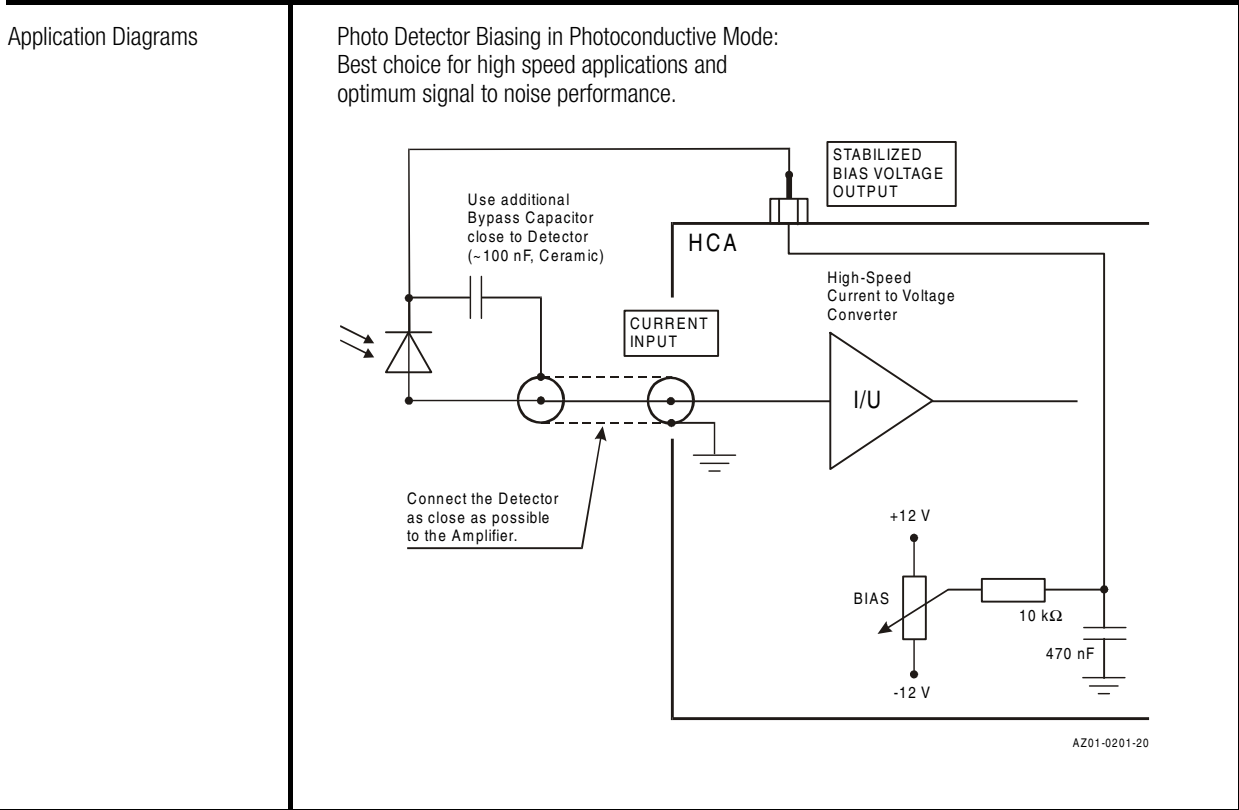

# Datasheet


# HCA-100M-50K-C

## High Speed Current Amplifier

Typical Performance Characteristics

### Frequency Response


Offs 3.3 dB RBW 3 MHz  
 Att 0 dB \* VBW 1 kHz M1[1] -2.94 dB  
 Ref -26.7 dBm SWT 320ms 110.64000000 MHz

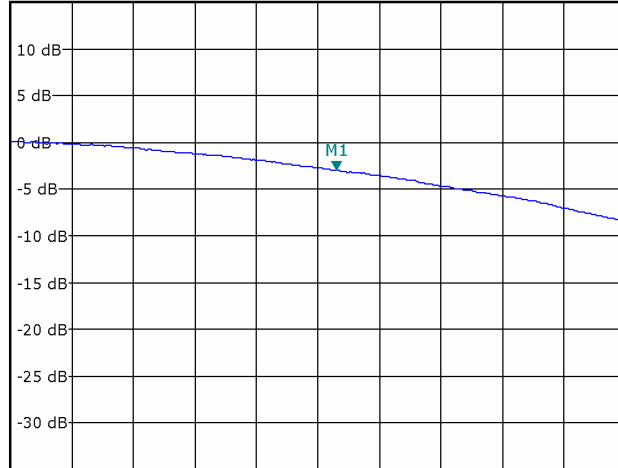

Start 10.0 MHz Stop 200.0 MHz

### Noise Spectrum

\* RBW 1 MHz  
 Att 0 dB \* VBW 1 kHz Noise1 189.508338 nV/√Hz  
 Ref 7.1 mV SWT 800ms Noise2 273.193149 nV/√Hz

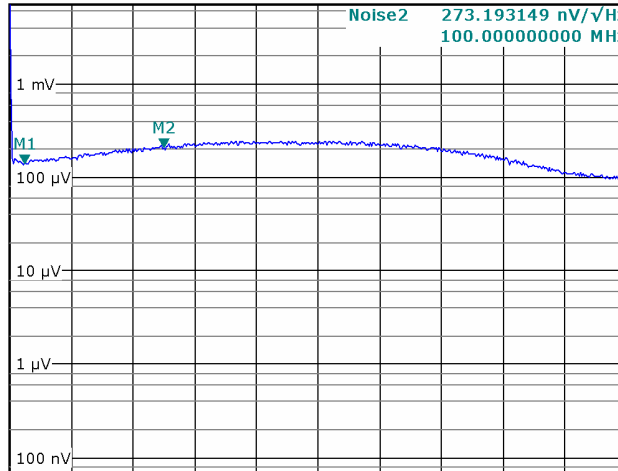

Start 0.0 Hz Stop 400.0 MHz


Note: Spectral noise data is measured at the amplifier output with open but shielded input. To determine the spectral input noise divide the measured output noise by the amplifier gain of  $5 \times 10^4$  V/A, i.e.:

Marker	Frequency	Output Noise	Resulting Input Noise
1	10 MHz	190 nV/√Hz	3.8 pA/√Hz
2	100 MHz	273 nV/√Hz	5.5 pA/√Hz


High Speed Current Amplifier

Typical Performance Characteristics (continued)

Pulse Response to Square Wave Input Signal (with 16 times averaging)

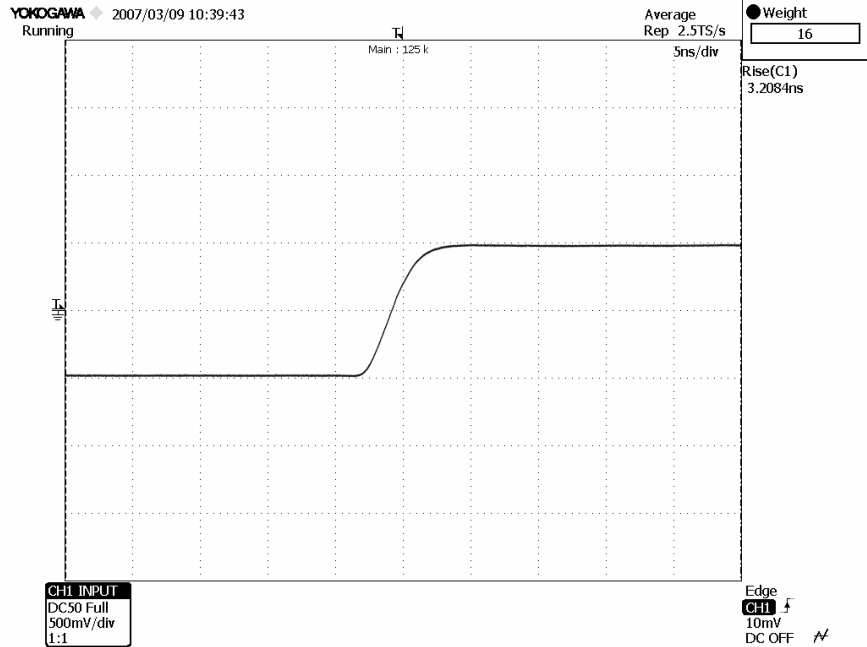



Large Signal Response output signal for 50 MHz, 20  $\mu$ A peak-peak input signal (with 4 times averaging)

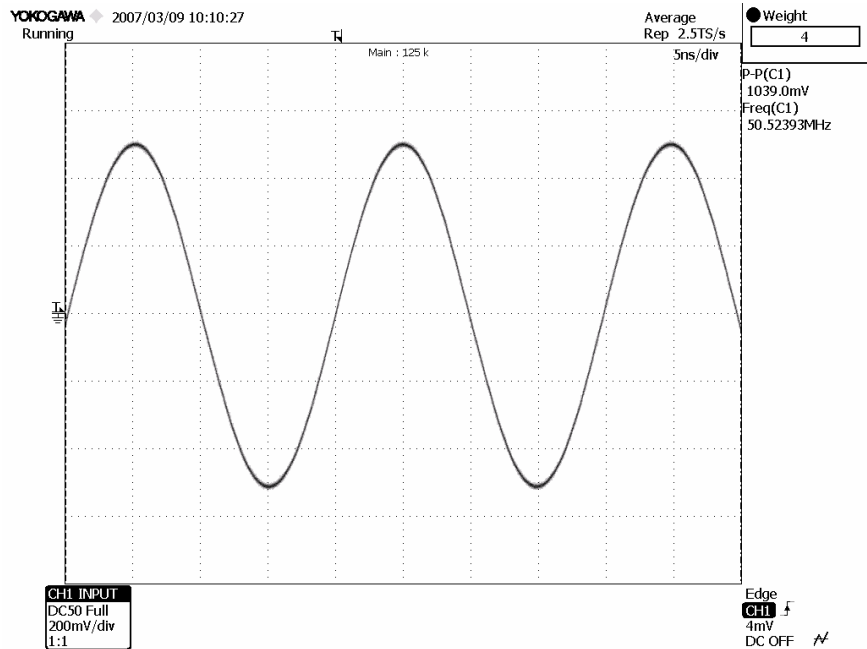

## High Speed Current Amplifier

Typical Performance Characteristics (continued)

Small Signal Response  
output signal for 1 MHz, 500 nA peak-peak square wave input signal (without (top) and with 64 times averaging (bottom))

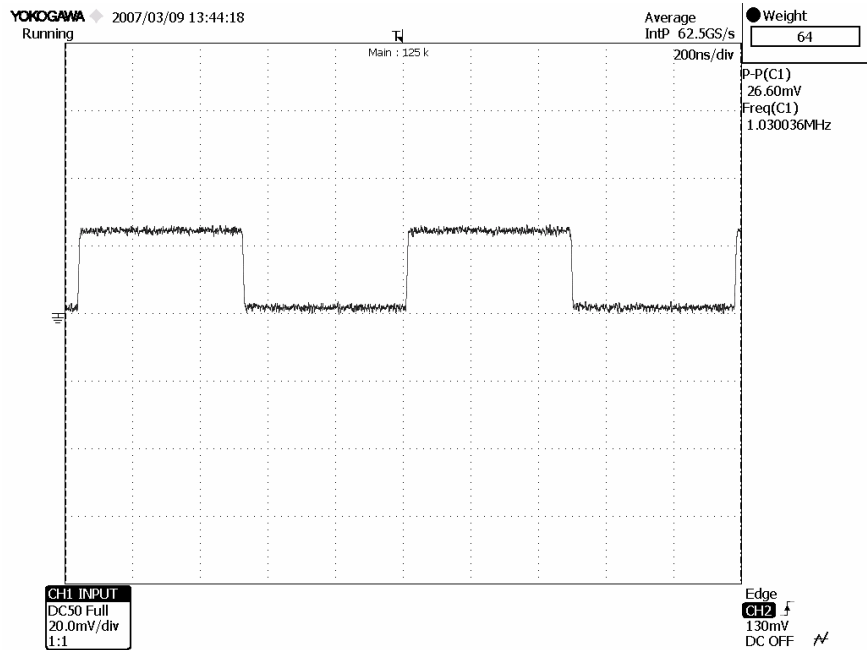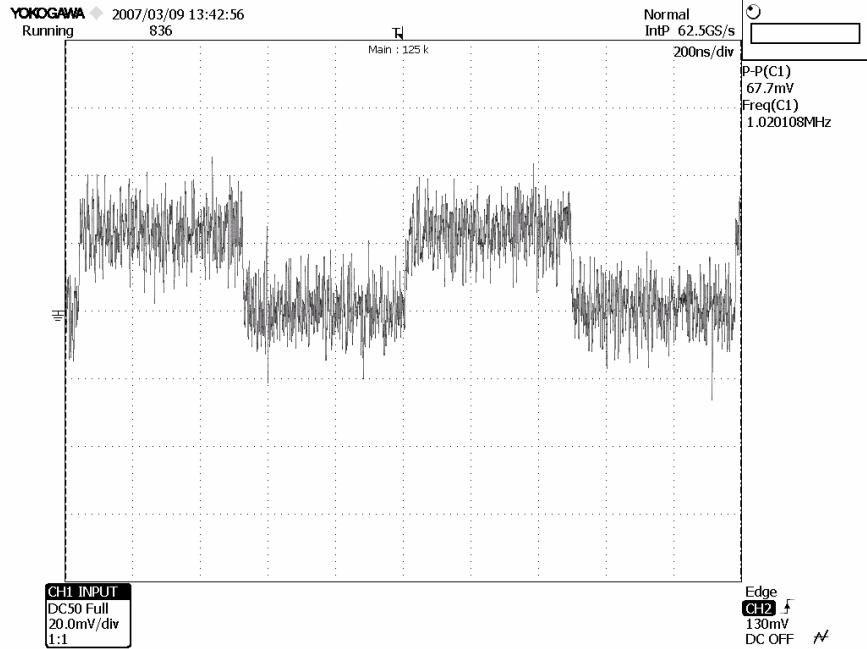


# Datasheet

# HCA-100M-50K-C

## High Speed Current Amplifier

### Dimensions

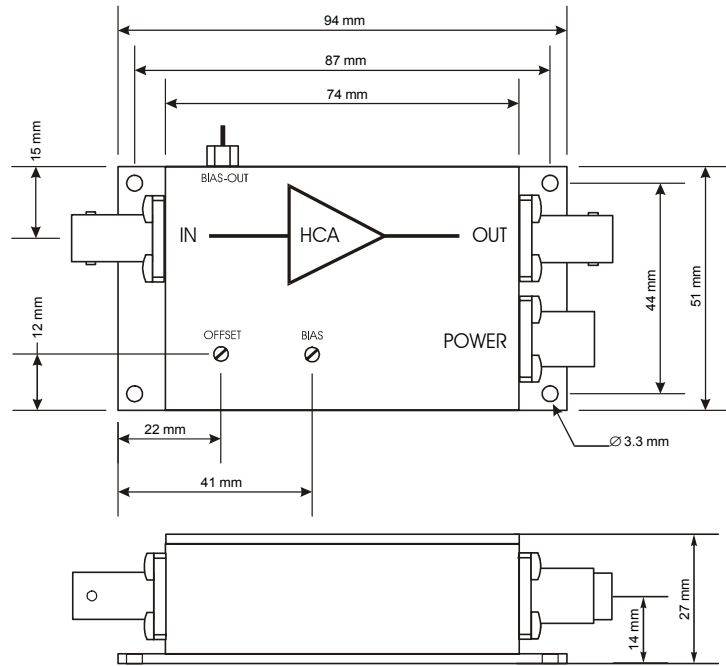

DZ01-0201-22

FEMTO Messtechnik GmbH  
 Klosterstr. 64  
 D-10179 Berlin · Germany  
 Tel.: +49-(0)30-280 4711-0  
 Fax: +49-(0)30-280 4711-11  
 e-mail: [info@femto.de](mailto:info@femto.de)  
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH  
 Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

