



HMS Series

Miniature Thermopile Sensors for Remote Temperature Measurement and Gas Analysis


The HMS Series of CMOS compatible thermopile sensor chips in TO46 (or TO18) and even smaller transistor housings, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The smaller package sizes benefit applications in which sensor mounting is a critical parameter. Especially the ultra small HMS Z11 F5.5 sensor with high symmetry (no orientation tab) opens new design and application possibilities. The HMS M-types offer the possibility to integrate an infrared lens into a TO46 housing and to reduce the field of view accordingly. The smaller chip TP1 is well suited for temperature measurements which require a precise measuring spot whereas the chip type TP2 offers higher signal.




Parameter	HMS Z11	HMS J11 K11*	HMS J1c1	HMS J21	Unit
element size	0,61 ²	0,61 ²	0,76 ²	1,2 ²	mm ²
voltage response ¹	22	22	30	63	V mm ² /W
sensitivity ¹	58	58	52	44	V/W
resistance R _{TP} ²	86	86	75	84	k Ohm
TC of resistance R _{TP} ²	0.02	0.02	0.02	0.02	% / K
noise ²	38	38	35	37	nV/ Hz ^{1/2}
detectivity ^{1,2}	0.9 10 ⁸	0.9 10 ⁸	1.1 10 ⁸	1.4 10 ⁸	cm Hz ^{1/2} / W
time constant	< 6	<6	8	10	ms
thermistor reference ²	100	100	100	100	kOhm
temp.coeff.of thermistor B ³	3940	3940	3940	3940	K
field of view ⁴	95	120	100	120	
operating temperature	-20...120				°C
storage temperature	-40...120				°C

Ordering Information:
 HMS / package shape / chip type /
 w/wo thermistor / opt. L lens with focal
 length f / F desired filter type,
 e.g.: HMS J11 F5.5
 e.g.: HMS M11 L3.0 F8.0



- 1) without filter, T_{obj}=100°C, DC
- 2) at T_{amb}=25°C
- 3) 25°C, 50°C
- 4) degree at 50% signal level
- * same as J11, without orientation nose

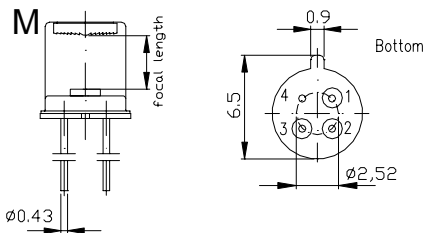

Filter types for temperature measurements

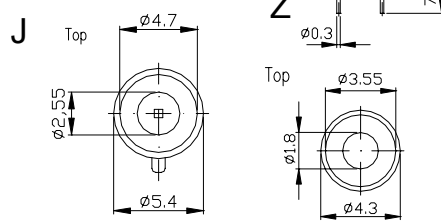

Filter types for Gas Analysis

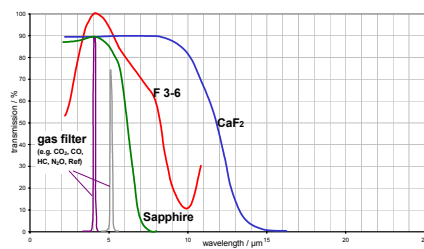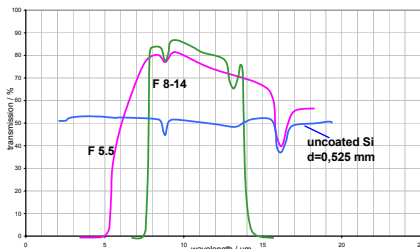

Modifications reserved Rev.08 / 10.04.2008

HEIMANN Sensor GmbH
 Grenzstr. 22
 D-01109 Dresden, Germany

Contact / Customer Support
 Phone 49 (0) 6123 60 50 30
 Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
 e-mail: info@heimannsensor.com