

Section 3

Folded Hybrid and Magic Tees and Transducers

Theory

MDL produces a broad line of magic tees to fit a variety of waveguide sizes. In most MDL tees, the collinear arms are folded to form a common wall at either the broad waveguide surface or the narrow waveguide surface. These are commonly called E or H plane folded tees to differentiate them from the classic magic tee. MDL's E and H plane tees are electrically identical to the magic tees in theory, and generally superior in performance. To eliminate confusion in designating various waveguide ports, the illustrations at the left indicate the correct terminology and the phase relationships.

The need for H plane tees arose with the advent of the differential circulator. The compact E plane tees were developed for antenna projects and other programs with space limitations. The generally improved performance of the new folded tees over the existing magic tee designs resulted in their use in many other waveguide circuits.

Mitered H plane tees were developed for use in single sideband generators, image rejection mixers and sub-assemblies. Because of their configuration, an even greater reduction in package size is possible.

The tees are true hybrid couplers when all the ports are reflectionless. Feeding the E or H arms results in an equal power split in the collinear arms while the fourth port is isolated to a high degree. Both the power division and E to H isolation are achieved by physical symmetry. The equal power split property is easily visualized by a study of the structure of the tee; the isolation can be explained by a simple vector-mechanical analogy. However, newcomers in the microwave field are not generally aware that feeding one of the collinear arms creates an equal power split between the E and H ports, while the other collinear arm remains isolated. The physical appearance of the tee makes this phenomenon even more unexpected, and may be the reason for the name "magic" tee.

Perhaps not obvious to microwave novices is the ability of any four-port tee junction, when used as a simple power divider with either the E or H arms terminated, to exhibit much better power balance characteristics than the simpler symmetrical three-port tee junction. This is true in most applications where the loads are less than ideal.


Most MDL tees that cover 10 to 15% bandwidths have power splits with 0.1 db equality or better, regardless of which port is used as the input. The isolation between perpendicular ports is over 40 db and the isolation between collinear arms is 25 db or better.

FEEDING E ARM

The collinear arms are 180° out of phase.

FEEDING H ARM

The collinear arms are in phase.

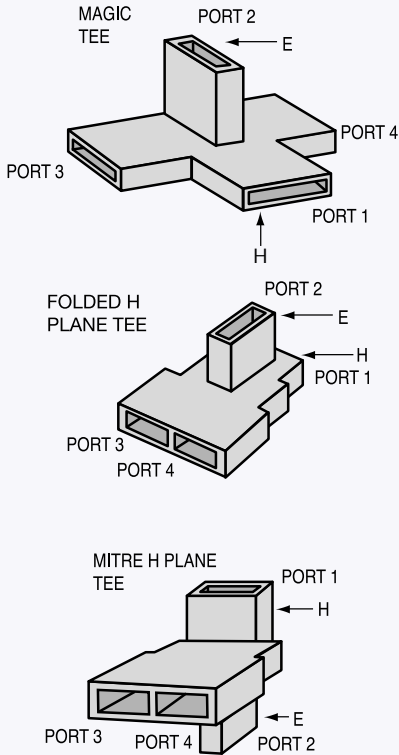


FEEDING E ARM

The collinear arms are in phase.


FEEDING H ARM

The collinear arms are 180° out of phase.

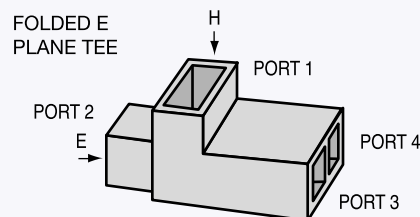

Section 3

Folded Hybrid and Magic Tees and Transducers

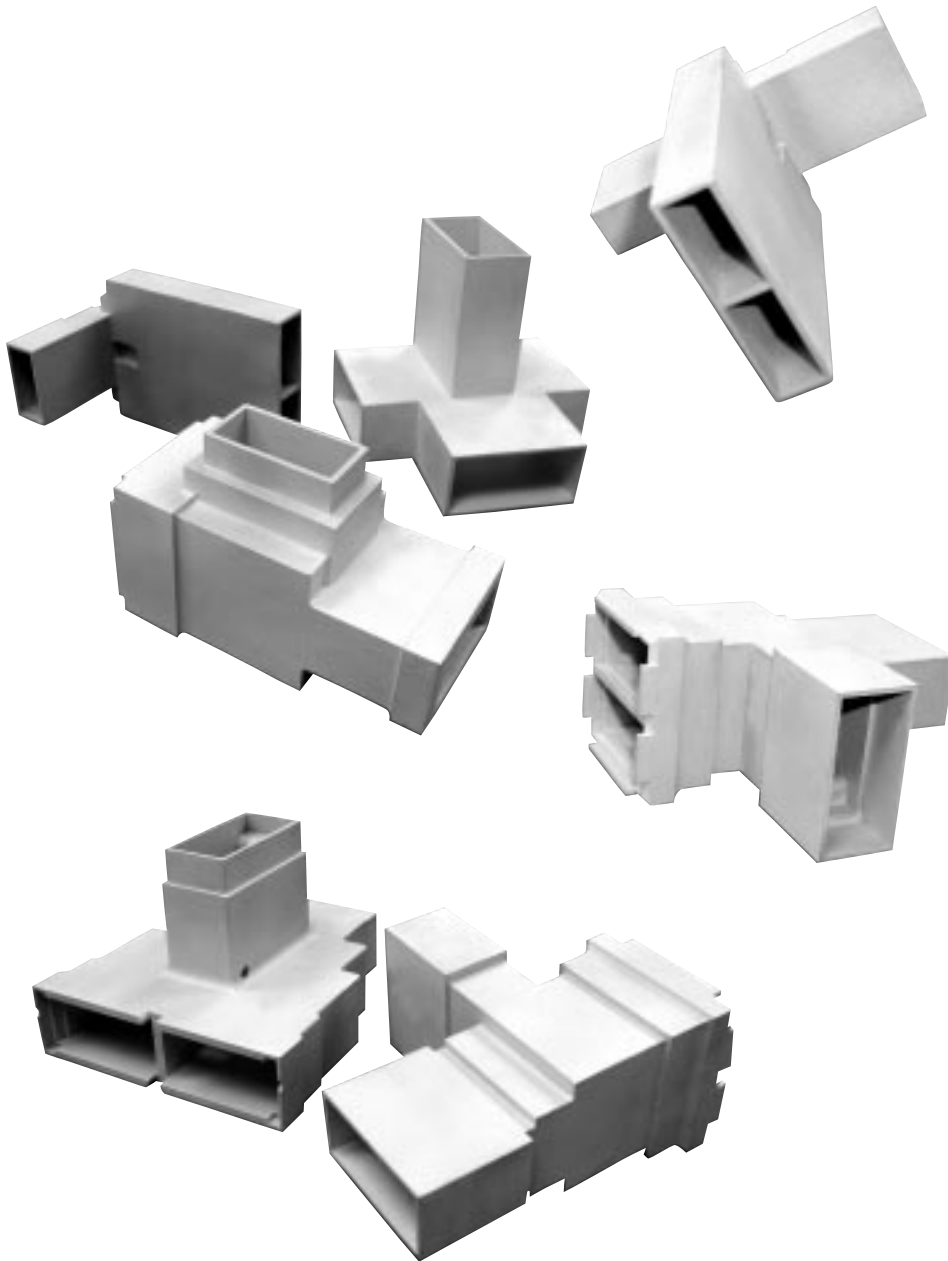

Theory




Each MDL folded hybrid tee is completely tested for VSWR characteristics of the E and H arms, for power split feeding the same arms, and for isolation between the E & H arms. The isolation between parallel arms is not measured but the figures given in the catalog are guaranteed. In most cases the guarantee is based on the lowest theoretical isolation, which is a function of the match of the E and H arms. In the few cases where our guarantee exceeds the theoretically worst figures, measurements have been made on a sample basis. A simple rule of thumb regarding reflections in the collinear arms is that they will never exceed the average reflection coefficient of the perpendicular arms. Thus, a tee which has a maximum VSWR of 1.10 in the H arm and 1.15 in the E arm, will have reflection coefficients of .05 and .07 respectively. The average reflection coefficient is .06. This means that the maximum VSWR of the collinear arms is $1 + .06/1 - .06 \approx 1.12$.

Using the same sample, the isolation between collinear ports will have a voltage ratio no greater than .06 or approximately 25 db. In no case will the highest theoretical VSWR occur simultaneously with the lowest theoretical isolation. MDL tees are guaranteed to equal or exceed stated specifications. Typical wide-band performance curves are available.

Licensed H.A.C. pat. 2,840,787

H PLANE FOLDED HYBRID TEES

H Plane Folded Hybrid Tees

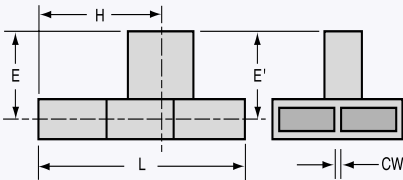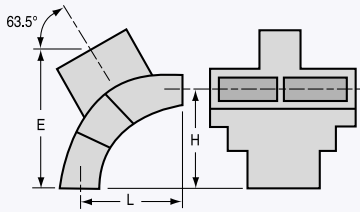



W/G Size	Frequency GHz	Model Number	Electrical Data					Mechanical Data						
			*VSWR Maximum		Isolation DB Min Between		Common Wall Thickness (inches)	Dimensions (inches)			Terminations		Recommended Dual Flange ¹²	
			H Arm	E Arm	E & H Arms	Parallel Arms		Unbalanced DB Max.	L	E	H	E & H Arms		Parallel Arms
WR 10	91.75-95.75	10TH16 ²	1.25	1.25	34	19	.25	1.12	0.38	0.56	.040	Cover ¹⁶ Flange	50FS12	10FS12
WR 15	50.0-60.0	15TH26 ²	1.30	1.30	35	18	.25	1.00	0.56	0.50	.040	UG385/U	15FS52	15FS52
	67.0-73.0	15TH16 ²	1.30	1.30	35	18	.25							
WR 22	43.5-45.5	22TH12	1.15	1.15	40	-	.20	1.04	0.60	0.60	.040	WG	CORRAL	-
WR 28	29.0-33.2	28TH42	1.25	1.25	35	22	.25	0.97	0.72	0.48	.040	WG	CORRAL	28FS12
	33.0-39.5	28TH22	1.35	1.35	35	22	.25							
	34.0-36.0	28TH12	1.20	1.20	35	22	.25							
WR 42	20.2-21.2	42TH22	1.20	1.20	40	20	.15	1.26	0.71	0.71	.090	WG	CORRAL	42FS32
	22.5-26.0	42TH12	1.15	1.20	35	25	.10	0.95	0.76	0.48	.090	WG	CORRAL	42FS32
WR 51	16.0-17.0	51TH22	1.12	1.15	40	28	.10	1.00	0.92	0.66	.040	WG	CORRAL	51FS12 ³
	16.50-19.65	51TH12	1.15	1.15	40	28	.10	1.39	0.92	0.80	.040	WG	CORRAL	51FS12 ³
WR 62	12.4-14.5	62TH32	1.10	1.10	40	28	.10	1.75	0.92	0.91	.040	WG	CORRAL	62FS52
	14.5-15.0	62TH32	1.15	1.15	40	25	.10							
	13.5-15.6	62TH12	1.12	1.10	40	28	.10	1.61	0.91	0.92	.040	WG	CORRAL	62FS52 ³
	15.0-17.5	62TH22	1.12	1.10	40	28	.10	1.81	0.81	0.95	.090	WG	CORRAL	62FS92
	15.5-17.0	62TH42	1.08	1.10	40	30	.10							
WR 75	10.5-11.7	75TH12	1.10	1.10	40	28	.10	1.77	0.92	0.80	.050	WG	CORRAL	75FS12
	11.0-12.85	75TH22	1.15	1.15	40	25	.10	1.96	1.09	1.10	.050	WG	CORRAL	75FS12
WR 90	8.2-10.0	90TH32	1.15	1.25	40	24	.10	2.78	1.75	1.50	.120	WG	CORRAL	90FS112
	8.5-9.6	90TH32	1.10	1.12	40	28	.10							
	8.5-9.6	90TH52	1.12	1.20	40	24	.10	1.47	1.12	0.75	.050	WG	CORRAL	90FS82 ³
	8.5-9.6	90TH12	1.10	1.10	40	28	.10	2.22	1.75	1.50	.050	WG	CORRAL	90FS82 ³
	8.5-9.6	90TH42	1.06	1.10	45	32	.10	2.78	1.75	1.50	.120	WG	CORRAL	90FS112 ³
	8.65-11.0	90TH62	1.25	1.25	40	20	.10	2.53	1.75	1.50	.120	WG	CORRAL	90FS112 ³
	8.8-11.2	90TH72	1.25	1.25	30	18	.10	1.27	1.12	0.82	.050 ¹³	COR.	CORRAL	NONE
	9.2-10.0	90TH72	1.15	1.15	35	25	.10							
10.2-12.4	90TH102	1.20	1.15	40	28	.10	2.18	1.18	1.20	.120	WG	CORRAL	90FS112	
WR 90 tapered to WR 112	8.5-9.6	90TH22	1.10	1.10	40	28	.10	2.41	E=1.25 E'=1.30	1.50	.120	WR112 WG	WR90 CORRAL	90FS122
WR 90 200 Hgt.	9.0-10.8	A90TH12	1.10	1.10	40	28	.10	2.00	0.98	1.10	.050	WG	CORRAL	
WR 102	9.5-10.5	102TH12	1.10	1.10	40	28	.10	2.75	1.75	1.56	.150	WG	CORRAL	

- Notes:** * All tees exhibit reasonable electrical characteristics over a broader frequency range than specified. Maximum VSWR's specified does not indicate typical performance but only the highest VSWR over the operating range of the tee.
- ² Available only in copper alloy with flanges.
- ³ This flange is integral cast to the tee.
- ⁷ Add 0.17 to Dimension "L" when using recommended dual flange.
- ⁸ E=E' and H=H' unless otherwise shown.
- ⁹ Available only in non-brazable aluminum with flanges.
- ¹⁰ Available only in aluminum with flanges.
- ¹² SEE FOOTNOTE ON NEXT PAGE
- ¹³ No physical commonwall. 0.050 commonwall required by mating component to function electrically.
- ¹⁵ No physical commonwall. 0.160 commonwall required by mating component to function electrically.
- ¹⁶ Similar to UG387/U

H Plane Folded Hybrid Tees

H PLANE FOLDED HYBRID TEES

W/G Size	Frequency GHz	Model Number	Electrical Data						Mechanical Data					
			*VSWR Maximum		Isolation DB Min Between		Unbalance DB Max.	Dimensions (inches)			Common Wall Thickness (inches)	Terminations		Recommended Dual Flange ¹²
			H Arm	E Arm	E & H Arms	Parallel Arms		L	E	H		E & H Arms	Parallel Arms	
WR112	7.0-8.75	112TH32	1.25	1.25	40	20	.10	2.87	1.44	1.56	.150	WG	CORRAL	112FS82 ³
	7.5-8.5	112TH42	1.10	1.10	40	28	.10							
	7.8-9.6	112TH82	1.25	1.50	40	20	.10	2.75	1.25	1.56	.150	WG	CORRAL	112FS82 ³
	8.25-10.25	112TH62	1.15	1.15	40	25	.10	2.75	1.25	1.56	.150	WG	CORRAL	112FS82 ³
	8.5-9.6	112TH72	1.10	1.15	40	25	.10							
	8.5-9.6	112TH52	1.10	1.10	40	30	.10	2.75	1.25	1.56	.064	WG	CORRAL	112FS62 ³
	8.5-9.6	112TH12	1.08	1.10	40	30	.10	2.75	1.25	1.56	.150	WG	CORRAL	112FS82 ³
WR137	5.4-5.9	137TH62	1.10	1.10	40	28	.10	4.11	2.15	1.95	.150	WG	CORRAL	137FS32 ³
	5.9-6.5	137TH22	1.10	1.10	40	28	.10	3.81	1.75	2.25	.150	WG	CORRAL	137FS32 ³
	6.0-7.0	137TH32	1.10	1.10	40	28	.10	3.81	1.56	2.25	.150	WG	CORRAL	137FS32 ³
	6.6-8.2	137TH42	1.15	1.15	40	25	.10							
	6.8-8.0	137TH72	1.10	1.10	40	28	.10							
WR137 tapered to WR187	5.4-5.9	137TH12	1.08	1.08	40	30	.10	4.34	E=1.44 E'=1.56	2.37	.150	WR187 WG	WR137 CORRAL	137FS42
A137 tapered to WR137	5.4-5.9 (I.D. 1.372-0.247)	A137TH12	1.15	1.15	35	25	.10	3.50	E=1.65 E'=1.84	2.23	.150	WR137 WG	A137 CORRAL	FLANGE BLANK 3.56 x .87
WR159	5.4-5.9	159TH12	1.10	1.10	40	28	.10	3.98	2.18	2.15	.150	WG	CORRAL	NONE
	5.9-6.5	159TH22	1.10	1.15	40	26	.10	4.49	2.26	2.45	.150	WG	CORRAL	NONE
WR187	3.95-4.4	187TH42	1.10	1.10	40	28	.10	4.44	1.62	2.62	.150	WG	CORRAL	187FS32 ³
	4.4-5.0	187TH32	1.10	1.10	40	28	.10	4.41	2.23	2.34	.150	WG	CORRAL	187FS32 ³
	5.0-6.0	187TH22	1.10	1.15	40	28	.10	3.97	2.37	2.00	.128	WG	CORRAL	187FS12
	5.1-5.9	187TH12	1.10	1.10	40	28	.10							
WR229	3.7-4.2	229TH12	1.10	1.10	40	28	.10	5.64	2.92	3.03	.128	WG	CORRAL	FLANGE BLANK 6.21 x 2.42
WR284	2.6-3.2	284TH12	1.15	1.15	40	25	.10	6.09 ⁷	2.62	3.55	.160	WG	CORRAL	284FS12
	2.7-3.15	284TH22	1.10	1.10	40	28	.10							
	2.9-3.5	284TH42	1.18	1.12	40	25	.15	6.09	2.62	3.55	.160	WG	CORRAL	284FS12
	3.0-3.4	284TH52	1.10	1.10	40	28	.15	6.09	2.62	3.55	.160	WG	CORRAL	284FS12

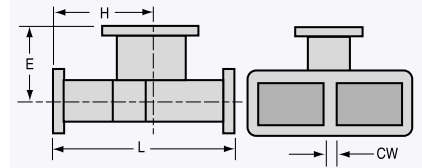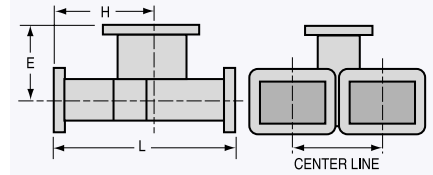

Notes: ³ This flange is integral cast to the tee.

¹²



10FS12 – Six 4-40 thread holes
 15FS52 – Two 0.0630-0.0635 dia. holes,
 and Six 4-40 thread holes
 28FS12 – Six 0.116 dia. holes
 42FS32 – Four 0.166 dia. holes
 51FS12 – Four 0.144 dia. holes
 62FS52 – Four 0.144 dia. holes

62FS92 – Four 0.144 dia. holes
 75FS12 – Four 0.125 dia. holes
 90FS82 – Six 8.32 thread holes
 90FS112 – Six 0.169 dia. holes
 90FS122 – Six 8.32 thread holes
 112FS62 – Ten 0.169 dia. holes
 112FS82 – Ten 0.169 dia. holes

137FS32 – Ten 0.199 dia. holes
 137FS42 – Ten 10-24 thread holes
 187FS12 – Twelve 0.196 dia. holes
 187FS32 – Twelve 0.196 dia. holes
 284FS12 – Twelve 0.261 dia. holes
 A284FS12 – Twelve 0.147 dia. holes

E Plane Folded Hybrid Tees

E PLANE FOLDED HYBRID TEES

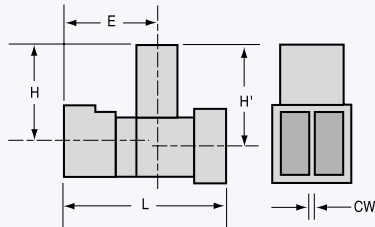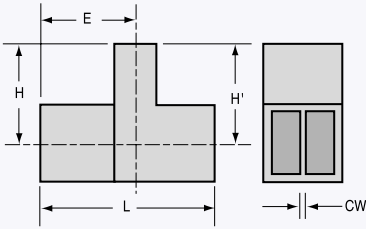

W/G Size	Electrical Data										Mechanical Data			
	Frequency GHz	Model Number	*VSWR Maximum		Isolation DB Min Between		Dimensions (inches)			Common Wall Thickness (inches)	Terminations		Recommended Dual Flange ¹²	
			H Arm	E Arm	E & H Arms	Parallel Arms	Unbalanced DB Max.	L	E		H	E & H Arms		Parallel Arms
WR28	28.0-29.0	28TE12	1.80	1.40	35	15	.25	0.90	0.49	0.68	.040	WG	CORRAL	28FT12 ³
	29.0-40.0	28TE12	1.50	1.35	35	18	.25							
	30.0-35.0	28TE32	1.25	1.25	35	20	.25	0.90	0.49	0.68	.040	WG	CORRAL	28FT12 ³
	34.0-38.0	28TE22	1.25	1.20	35	22	.25	0.90	0.49	0.60	.040	WG	CORRAL	28FT12 ³
WR42	19.5-27.0	42TE12	1.80	1.35	35	15	.20	1.14 ⁴	0.72	0.98	.040	WG	CORRAL	42FT12
	20.0-24.0	42TE22	1.20	1.15	35	22	.20							
WR51	15.2-17.2	51TE22	1.15	1.15	35	25	.10	1.04	0.66	1.04	.040	WG	CORRAL	51FT12
WR51 tapered to WR62	16.0-17.0	51TE12	1.15	1.15	35	25	.10	1.42	0.94	H=0.97 H'=1.03	.090	WR62 WG	WR51 CORRAL	51FT12
WR62	12.4-17.5	62TE72	2.20	1.30	35	15	.15	1.65	1.03	1.40	.090	WG	CORRAL	62FT12 ³
	14.0-15.0	62TE22	1.50	1.25	35	15	.15							
	15.0-18.0	62TE22	1.40	1.25	35	18	.15	1.65 ⁴	1.03	1.40	.090	WG	CORRAL	62FT12 ³
	15.0-17.0	62TE32	1.20	1.20	35	22	.15							
	16.0-17.0	62TE12	1.15	1.15	35	25	.10	1.87	0.94	0.97	.090	WG	CORRAL	62FT12 ³
WR75	10.5-14.9	75TE12	1.70	1.25	35	16	.15	1.92 ⁴	1.27	1.76	.090	WG	CORRAL	75FT12
	10.9-13.1	75TE22	1.15	1.20	35	20	.15							
WR90	7.5-8.3	90TE22	1.85	1.25	35	16	.10	1.94 ⁵	1.30	1.50	.120	WG	CORRAL	90FT12 ³
	8.3-10.7	90TE22	1.25	1.15	35	20	.10							
	10.7-10.95	90TE22	1.85	1.15	35	16	.10							
	8.2-12.4	90TE32	3.00	1.25	30	10	.10	2.23	1.30	1.50	.120	WG	CORRAL	90FT12 ³
	8.8-12.2	90TE32	2.00	1.25	35	15	.10							
9.0-10.25	90TE92	1.15	1.15	40	24	.10	1.94 ⁵	1.30	1.50	.120	WG	CORRAL	90FT12 ³	
WR102	7.0-11.0	102TE12	1.80	1.15	40	18	.10	2.64	1.46	1.36	.150	WG	CORRAL	102FT12
WR112	7.5-8.5	112TE22	1.20	1.15	35	25	.10	2.33	1.50	2.00	.150	WG	CORRAL	112FT12 ³
	8.5-9.6	112TE32	1.15	1.12	40	25	.10	2.75	1.63	2.00	.150	WG	CORRAL	112FT12 ³
WR137	5.4-5.9	137TE12	1.10	1.10	40	28	.10	2.62	1.56	2.36	.150	WG	CORRAL	137FT12 ³
	5.4-6.8	137TE22	1.20	1.15	35	22	.10							
WR187	3.96-4.33	187TE22	1.10	1.10	40	28	.10	3.25	1.80	3.02	.150	WG	CORRAL	187FT12 ³
	5.4-5.9	187TE12	1.10	1.10	40	28	.10	4.00	2.23	2.56	.128	WG	CORRAL	187FT22 ³
WR229	3.7-4.2	229TE12 ¹³	1.15	1.10	40	25	.10	5.77	3.06	4.28	.150	WG	CORRAL	229FT12
WR284	2.6-3.0	284TE12	1.15	1.20	40	28	.10	4.64	2.97	4.67	.160	WG	CORRAL	284FT22
	2.9-3.5	284TE32	1.15	1.15	40	28	.10	4.64	2.97	4.67	.160	WG	CORRAL	284FT22

Notes: * All tees exhibit reasonable electrical characteristics over a broader frequency range than specified. Maximum VSWR's specified does not indicate typical performance but only the highest VSWR over the operating range of the tee.

³ This flange is integral cast to the tee.

⁴ Add 0.03 to Dimension "L" when using recommended dual flange.

⁵ Add 0.06 to Dimension "L" when using recommended dual flange.

⁸ E=E' and H=H' unless otherwise shown.

⁹ Available only in non-brazable aluminum with flanges.

¹²

28FT12 - Four 0.116 dia. holes

42FT12 - Four 0.116 dia. holes

51FT12 - Four 0.144 dia. holes

62FT12 - Four 0.144 dia. holes

75FT12 - Four 0.144 dia. holes

90FT12 - Four 0.169 dia. holes

102FT12 - Four 0.169 dia. holes

112FT12 - Four 8.32 thread holes

137FT12 - Four 0.219 dia. holes

187FT22 - Four 0.219 dia. holes

229FT12 - Eight 0.257 dia. holes

284FT22 - Eight 0.257 dia. holes

¹³ Fabricated unit sold only as a complete assembly.

Magic Tees

Electrical Data								Mechanical Data		
W/G Size	Figure	Frequency GHz	Model Number ⁺	VSWR Maximum		Isolation DB Min Between E & H Arms	Unbalance DB	in inches (without flanges)		
				H Arm	E Arm			L	E	H
WR28	1a	29.0-34.0	28TN16	1.25	1.25	35	±.20	0.75	0.50	0.50
WR42	1a	20.0-24.0	42TN16	1.25	1.30	40	±.20	1.12	0.83	0.75
WR51	1a	15.8-17.5	51TN16	1.15	1.15	40	±.10	1.52	1.12	1.09
WR62	1a	15.4-17.2	62TN26	1.30	1.20	40	±.15	1.52	1.12	1.09
WR75	1a	10.35-12.35	75TN16	1.25	1.25	40	±.10	2.50	1.49	1.67
WR90	1a	8.5-9.6	90TN16	1.25	1.30	40	±.10	2.30	1.47	1.14
	1a	9.0-10.2	90TN26	1.15	1.15	40	±.10	2.30	1.47	1.14
	3	8.9-9.4	A90TN12 ^b	1.15	1.20	35	±.15	2.00	.70	1.00
	2	8.8-10.06	A90TN22 ^a FOLD E	1.25	1.25	30	±.25	1.96	.29	.68
WR112	4	8.5-9.6	C90TN12 ^c	1.20	1.25	35	±.10	2.00	.56	.75
	1b	8.5-9.6	112TN16 ^e	1.10	1.15	40	±.10	3.20	1.60	1.60
WR137	1b	7.0-7.6	112TN26 ^e	1.20	1.25	40	±.10	3.20	1.60	1.60
	1a	5.4-5.9	137TN16	1.15	1.10	40	±.10	3.62	1.90	1.90
WR159	1a	5.9-6.5	137TN26	1.30	1.25	40	±.10	3.62	1.90	1.90
	1a	5.1-5.95	159TN16	1.15	1.15	40	±.10	4.25	2.12	2.12
WR187	1a	5.4-5.9	187TN16	1.15	1.15	40	±.10	3.68	2.68	2.52
WR284	1a	2.9-3.5	284TN16 ^d	1.25	1.25	40	±.10	4.40	3.53	3.53
	1a	3.1-3.5	284TN26 ^d	1.15	1.20	40	±.10	4.40	3.53	3.53

Notes: ⁺ Model Numbers represent unit dimensions without flanges.
See page 46 for ordering information on flange combinations.

- ^a .200 Height.
- ^b .200 Height. E arm corral cast for .030 W/G wall.
- ^c .150 Height. Outputs corraled, E and H arms male W/G.
- ^d Supplied in Alum only.
- ^e Supplied with flanges only, per figure 1b.

1 = Supplied in figure 1a or 1b configuration.

MAGIC TEES

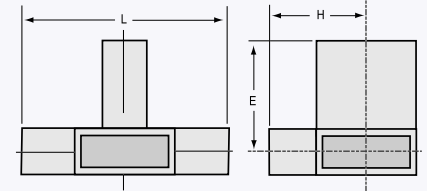


FIG. 1a (No Flanges)

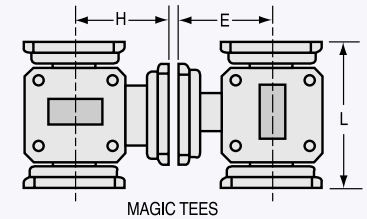


FIG. 1b (With Flanges)




FIG. 2

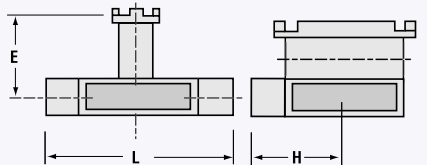


FIG. 3



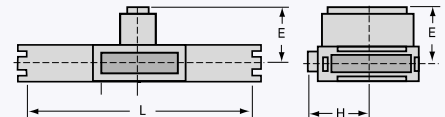


FIG. 4

MAGIC TEES

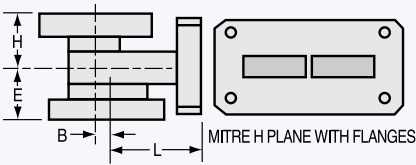

Mitre H Plane Tees

W/G Size	Electrical Data						Mechanical Data							
	Frequency GHz	Model Number	*VSWR Maximum		Isolation DB Min Between		Unbalance DB	Dimensions (inches)				Common Wall Thickness (inches)	Dual Output Terminal	Recommended Dual Flange ¹²
			H Arm	E Arm	E & H Arms	Parallel Arms		L	E	H	B			

Mitre H Plane with Flanges

WR28	33.5-36.0	28TC16	1.25	1.25	40	20	±10	.665	.310	.310	.070	.040	FLANGE	28FS12
	30.0-38.5	28TC26	1.50	1.50	40	10	±10	.665	.310	.310	.070	.040	FLANGE	28FS12
WR42	18.0-26.0	42CT16	1.70	1.50	40	10	±10	.610	.320	.320	.040	.125	FLANGE	42FS12
	16.0-17.0	51TC16	1.10	1.15	40	25	±10	.831	.388	.388	.128	.040	FLANGE	51FS12
WR51	15.5-18.0	51TC26	1.15	1.20	40	22	±10	.831	.388	.388	.128	.040	FLANGE	51FS12
	15.5-17.2	62TC16	1.15	1.15	40	23	±10	.835	.480	.361	.156	.040	FLANGE	62FS52
WR62	15.0-17.5	62TC26	1.20	1.30	40	19	±10	.835	.840	.361	.156	.040	FLANGE	62FS52
	13.0-13.5	62TC36	1.20	1.20	40	23	±10	.835	.516	.516	.156	.040	FLANGE	62FS52
WR90	12.5-14.0	62TC46	1.35	1.18	40	19	±10	.835	.516	.516	.156	.040	FLANGE	62FS52
	8.5-9.6	90TC16	1.30	1.20	40	21	±10	.983	.410	.680	.250	.050	FLANGE	90FS72
WR112	8.2-10.4	90TC26	1.45	1.40	40	15	±10	.983	.410	.680	.250	.050	FLANGE	90FS72
	6.8-8.2	112TC16	1.30	1.30	40	17	±10	1.216	.620	1.041	.312	.064	FLANGE	112FS62
WR112	6.5-8.5	112TC26	1.60	1.50	40	14	±10	1.216	.620	1.041	.312	.064	FLANGE	112FS62

Mitre H Plane Without Flanges

W/G Size	Frequency GHz	Model Number	*VSWR Maximum	H Arm	E Arm	E & H Arms	Parallel Arms	Unbalance DB	L		E		H		B	OUT TERM
									STD.	MIN.	STD.	MIN.	STD.	MIN.		
WR28	33.5-36.0	28TC12	1.25	1.25	40	20	±10	.665	.213	.310	.236	.310	.150	.040	WG	.070
	30.0-38.5	28TC22	1.50	1.50	40	15	±10	.655	.213	.310	.236	.310	.150	.040	WG	.070
WR42	18.0-26.0	42TC12	1.70	1.50	40	10	±10	.610	.387	.320	.165	.320	.254	.040	WG	.125
	16.0-17.0	51TC12	1.10	1.15	40	25	±10	.335	.315	.388	.388	.388	.388	.040	CORRAL	.128
WR51	15.5-18.0	51TC22	1.15	1.20	40	23	±10	.335	.315	.388	.388	.388	.388	.040	CORRAL	.128
	15.5-17.2	62TC12	1.15	1.15	40	23	±10	.511	.427	.480	.480	.288	.361	.040	CORRAL	.156
WR62	15.0-17.5	62TC22	1.20	1.30	40	19	±10	.511	.427	.480	.480	.361	.288	.040	CORRAL	.156
	13.0-13.5	62TC32	1.20	1.20	40	23	±10	.361	.321	.361	.246	.361	.246	.040	CORRAL	.156
WR90	12.5-14.0	62TC42	1.35	1.18	40	19	±10	.321	.361	.361	.246	.361	.246	.040	CORRAL	.156
	8.5-9.6	90TC12	1.30	1.20	40	21	±10	.983	.500	.410	.300	.680	.680	.050	CORRAL	.250
WR112	8.2-10.4	90TC22	1.45	1.40	40	15	±10	.983	.500	.410	.300	.680	.680	.050	CORRAL	.250
	6.8-8.2	112TC12	1.30	1.30	40	17	±10	1.070	.690	.450	.380	.950	.850	.064	WG	.312
WR112	6.5-8.5	112TC22	1.60	1.50	40	13	±10	1.070	.690	.450	.380	.950	.850	.064	WG	.312

Transducers


Dual mode transducers, capable of separating horizontal and vertical polarized waves, are readily available in most waveguide sizes. MDL's investment castings provide rigid, compact construction to insure precise mechanical configuration and excellent electrical performance. These designs feature low VSWR and insertion loss, high isolation and power handling capabilities.

Square output openings are standard except where noted. Circular outputs, other than those shown in the data below, and special flanges can be supplied upon request.

W/G Size	Frequency GHz	Style	Model Number	*VSWR Maximum		Mechanical Dimensions†			Output Dimensions			
				H Arm	E Arm	H	E	L	A	B		
Dual Mode Transducers												
WR22	35.5-37.5	1	22TR12	1.25	1.25	0.35	0.35	0.55	0.220	0.252	+0.03 -0.00	
WR28	34.0-36.0	1	28TR12	1.20	1.20	0.50	0.43	0.81	0.204	0.286	+0.02 -0.00	
WR42	19.5-23.0	1	42TR12	1.30	1.20	0.75	0.60	1.50	0.340	0.425	+0.03 -0.00	
WR51	16.0-17.0	1	51TR12	1.15	1.15	1.00	0.79	1.50	0.454	0.536	+0.03 -0.00	
	15.65-17.1	2	51TR22	1.15	1.20	0.75	1.20	1.32	0.600	0.500	±0.05	
WR62	13.0-14.0	1	62TR22	1.15	1.15	1.10	0.95	1.80	0.562	0.645	+0.03 -0.00	
	14.0-15.0	1	62TR32	1.12	1.12	1.10	0.85	1.80	0.519	0.599	+0.03 -0.00	
	15.0-17.0	1	62TR12	1.15	1.15	1.10	0.95	1.80	0.454	0.536	+0.03 -0.00	
WR75	10.8-11.5	1	75TR12	1.15	1.10	1.28	1.15	1.98	0.678	0.780	+0.03 -0.00	
WR90	8.5-9.6	1	90TR12	1.10	1.10	1.75	1.35	2.50	0.800	0.905	+0.03 -0.00	
	9.2-10.2	1	90TR22	1.25	1.25	1.75	1.35	2.50	0.800	0.905	+0.03 -0.00	
WR112	7.0-8.0	1	112TR12	1.15	1.15	2.04	1.34	3.04	0.995	1.128	+0.04 -0.00	
	7.0-8.0	2	112TR22	1.15	1.15	2.04	1.34	3.04	1.288	1.160	±0.05	
	7.3-8.3	1	112TR32	1.55	1.45	2.04	1.34	3.04	0.995	1.128	+0.04 -0.00	
WR137	5.4-5.9	1	137TR12	1.10	1.10	2.18	1.13	3.68	1.372	1.503	+0.05 -0.00	
	5.4-5.9	1	137TR22	1.10	1.10	2.18	1.58	3.68	1.372	1.503	+0.05 -0.00	
WR284	2.6-3.2	1	284TR32	1.50	1.15	4.16	3.30	6.63	2.525	2.690	+0.08 -0.00	
	2.65-3.1	1	284TR12	1.20	1.15	4.16	3.30	6.63	2.525	2.690	+0.08 -0.00	
	2.7-3.1	1	284TR22	1.15	1.12	4.16	3.30	6.63	2.525	2.690	+0.08 -0.00	






Notes: Minimum isolation 40 db
 † Dimensional tolerances
 WR22 through WR137±.015
 WR284±.020

MITRE H PLANE TEES

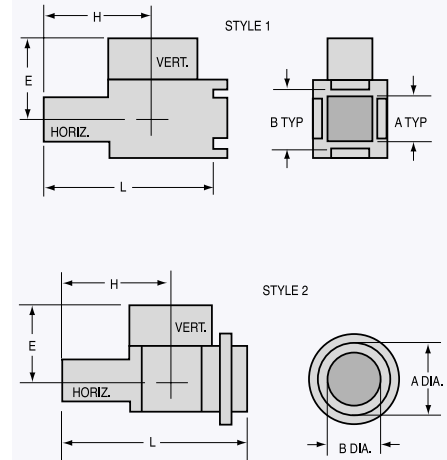

Transducers

TRANSDUCERS

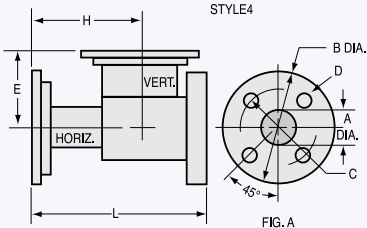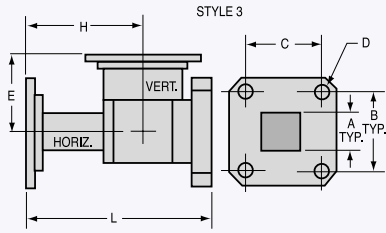

W/G Size	Frequency GHz	Style	Model Number	*VSWR Maximum		Mechanical Dimensions†						Flange pattern	
				H Arm	E Arm	H	E	L	A	B	C		D
WR28	34.0-36.0	3	28TR16	1.20	1.20	0.50	0.54	0.81	.204	.500	.530	.116	-
WR42	19.5-23.0	4	42TR36	1.30	1.20	0.91	0.76	1.520	.400	1.135	.670	.116	FIG. A
WR51	16.0-17.0	3	51TR16	1.15	1.15	1.00	1.10	1.50	.454	.956	.994	.144	-
	15.65-17.1	4	51TR26	1.15	1.20	1.00	1.10	1.57	.500	1.350	.925	.144	FIG. A
WR62	15.0-17.0	3	62TR16	1.15	1.15	1.10	1.18	1.80	.454	.956	.944	.144	-
	13.0-14.0	3	62TR26	1.15	1.15	1.17	1.00	1.87	.562	.956	.994	.144	-
	14.0-15.0	3	62TR36	1.12	1.12	1.10	0.95	1.68	.519	.956	.994	.144	-
	13.75-15.25	4	62TR46	1.30	1.20	1.15	1.18	1.855	.590	1.300	1.000	.144	FIG. D THD
	15.0-17.0	4	62TR56	1.20	1.20	1.10	1.18	1.80	.590	1.500	1.070	.144	FIG. A
WR75	10.8-11.5	3	75TR16	1.15	1.10	1.28	1.15	1.98	.678	1.10	1.10	.144	-
WR90	8.5-9.6	3	90TR36	1.10	1.10	1.75	1.35	2.50	.800	1.280	1.220	.169	-
	9.2-10.2	3	90TR46	1.25	1.25	1.75	1.35	2.50	.800	1.280	1.220	.169	-
	8.5-9.6	4	90TR56	1.25	1.25	1.75	1.35	2.500	.930	1.600	1.360	.169	FIG. D THD
WR112	7.0-8.0	3	112TR16	1.15	1.15	2.04	1.34	3.04	.995	1.474	1.352	.169	-
	7.2-7.8	4	112TR26	1.15	1.15	2.27	1.50	2.98	1.160	2.34	1.75	.169	FIG. B
	7.3-8.3	3	112TR36	1.55	1.45	2.04	1.34	3.04	.995	1.474	1.352	.169	-
	7.3-8.3	4	112TR46	1.55	1.45	2.27	1.50	2.98	1.160	2.34	1.76	.169	FIG. B
WR137	5.4-5.9	3	137TR16	1.10	1.10	2.33	1.58	3.83	1.372	2.250	2.125	10.32	- THD
WR284	2.65-3.1	3	284TR16	1.20	1.15	4.16	3.30	6.63	2.525	8 HOLE FLANGE	-	.257	-
	2.7-3.1	3	284TR26	1.15	1.12	4.16	3.30	6.63	2.525	284FT22	-	.257	-
	2.6-3.2	3	284TR36	1.50	1.15	4.16	3.30	6.63	2.525	-	-	.257	-
	2.7-3.1	4	284TR46	1.20	1.17	4.16	3.30	7.75	2.940	6.50	-	.257	FIG. C
	2.7-2.9	4	284TR56	1.20	1.20	4.16	3.30	7.75	2.940	6.50	-	.257	FIG. C

Notes: Minimum isolation 40dB
 *Dimensional tolerances WR22 through WR137±.015
 WR284±.020

