



LFS 117

Conductivity Sensor

For various conductivity measurement applications




Benefits & Characteristics

- Wide conductivity and temperature range
- Fast response time
- Optimal accuracy
- Resistance to various chemicals¹⁾
- Excellent long-term stability
- Integrated temperature measurement
- 2 or 4 electrode measurement
- Customer specific sensor available upon request

1) Aggressive media can influence the long-term stability

Illustration²⁾

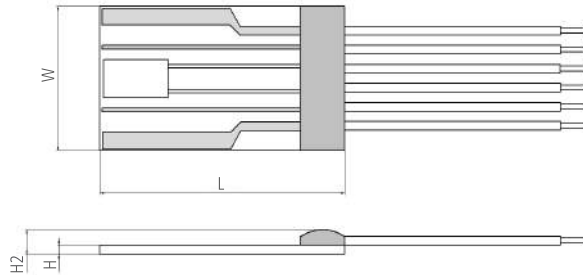

2) For actual size, see dimensions

Technical Data

Operating temperature range:	-50 °C to +150 °C
Conductivity range:*	0.2 mS/cm to 200 mS/cm
Cell constant:*	typical 0.435 1/cm at 1.4 mS/cm
Temperature sensor:*	Pt1000
Measurement frequency range:	100 Hz bis 3 kHz
Maximum supply voltage (electrodes):	< 0.7 V _{pp} (Electrolysis of the analyte has to be avoided)
Characteristics curve:	3850 ppm/K
Measuring current ³⁾ :	0.3 mA
3) Selfheating must be considered	
Temperature sensor accuracy (dependent on temperature range):*	IST AG reference
	DIN EN 60751 F0.3 B
	DIN EN 60751 F0.6 C
Connection:*	Pt/Ni wires, Ø 0.2 mm Cu/Ag wires, PTFE insulated, AWG 30



LFS 117

Conductivity Sensor



INNOVATIVE SENSOR TECHNOLOGY



For various conductivity measurement applications



Temperature dependence of resistivity:

according to DIN EN 60751:

$$-50\text{ °C to }0\text{ °C} \quad R(T) = R_0 \times (1 + A \times T + B \times T^2 + C \times (T - 100) \times T^3)$$

$$0\text{ °C to }150\text{ °C} \quad R(T) = R_0 \times (1 + A \times T + B \times T^2)$$

$$A = 3.9083 \times 10^{-3} \times \text{°C}^{-1}$$

$$B = -5.775 \times 10^{-7} \times \text{°C}^{-2}$$

$$C = -4.183 \times 10^{-12} \times \text{°C}^{-4}$$

R_0 = resistance value in Ohm at $T = 0\text{ °C}$


T = temperature in accordance with ITS90

Storage temperature: -20 °C to +150 °C

Alternative construction: * Customized over-mold

* Customer specific alternatives available

Pin Assignment

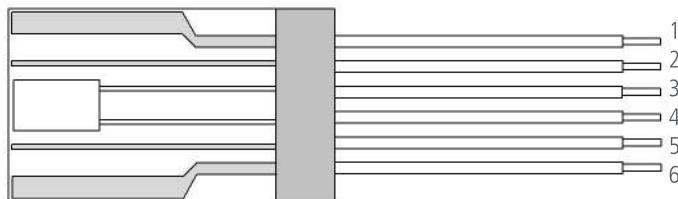

1	2	3	4	5	6
I_2	V_2	T_2	T_1	V_1	I_1

I: applied current V: measured voltage T: temperature sensor

Order Information - 6W (Ni/Pt wires, Ø 0.2 mm)

Size	Dimensions (L x W x H / H2 in mm)	F0.3 (class B)	F0.6 (class C)
Nominal resistance: 1000 Ω at 0 °C			
117	16.9 x 9.9 x 0.65 / 1.2	LFS1K0.117.6W.B.010-6	LFS1K0.117.6W.C.010
Order code		390.00025	390.00027



LFS 117

Conductivity Sensor

For various conductivity measurement applications



INNOVATIVE SENSOR TECHNOLOGY

Order Information - 2I (Cu/Ag wires, PTFE insulated, AWG 30)

Size Dimensions F0.3 (class B)
(L x W x H / H2 in mm)

Nominal resistance: 1000 Ω at 0 °C

117	16.9 x 9.9 x 0.65 / 1.2	LFS1K0.117.2I.B.300-6
Order code		390.00057
117	16.9 x 9.9 x 0.65 / 1.2	LFS1K0.117.2I.B.070-6
Order code		390.00023



INNOVATIVE SENSOR TECHNOLOGY

Innovative Sensor Technology IST AG, Stegrütistrasse 14, CH-9642 Ebnat-Kappel, Switzerland,
Phone: +41 (0) 71 992 01 00 | Fax: +41 (0) 71 992 01 99 | E-mail: info@ist-ag.com | Web: www.ist-ag.com



All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved



LFS 155 Conductivity Sensor



INNOVATIVE SENSOR TECHNOLOGY



For various conductivity measurement applications




Benefits & Characteristics

- Wide conductivity and temperature range
- Fast response time
- Optimal accuracy
- Resistance to various chemicals¹⁾
- Excellent long-term stability
- Integrated temperature measurement
- 2 or 4 electrode measurement
- Customer specific sensor available upon request

1) Aggressive media can influence the long-term stability

Illustration²⁾

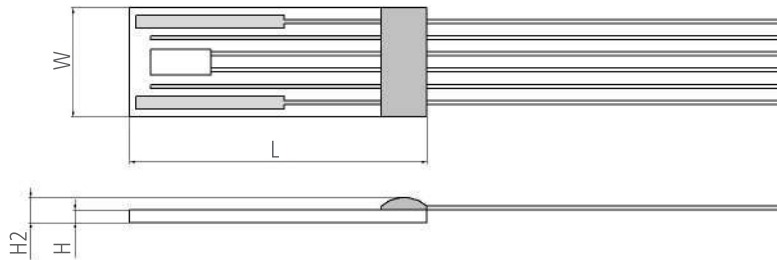

2) For actual size, see dimensions

Technical Data

Operating temperature range:	-50 °C to +150 °C	
Conductivity range:*	0.1 mS/cm to 200 mS/cm	
Cell constant:*	typical 0.66 1/cm at 1.4 mS/cm	
Maximum supply voltage (electrodes):	< 0.7 V _{pp} (Electrolysis of the analyte has to be avoided)	
Measurement frequency range:	100 Hz to 3 kHz	
Temperature sensor:*	Pt1000	
Characteristics curve:	3850 ppm/K	
Measuring current ³⁾ :	0.3 mA	
3) Selfheating must be considered		
Temperature sensor accuracy (dependent on temperature range):*	IST AG reference	
	DIN EN 60751 F0.3	B
	DIN EN 60751 F0.6	C
Connection:*	Pt/Ni wires, Ø 0.2 mm	



LFS 155 Conductivity Sensor



INNOVATIVE SENSOR TECHNOLOGY



For various conductivity measurement applications



Temperature dependence of resistivity:

according to DIN EN 60751:

$$-50\text{ °C to }0\text{ °C} \quad R(T) = R_0 \times (1 + A \times T + B \times T^2 + C \times (T-100) \times T^3)$$

$$0\text{ °C to }150\text{ °C} \quad R(T) = R_0 \times (1 + A \times T + B \times T^2)$$

$$A = 3.9083 \times 10^{-3} \times \text{°C}^{-1}$$

$$B = -5.775 \times 10^{-7} \times \text{°C}^{-2}$$

$$C = -4.183 \times 10^{-12} \times \text{°C}^{-4}$$

R_0 = resistance value in Ohm at $T = 0\text{ °C}$


T = temperature in accordance with ITS90

Storage temperature: -20 °C to +150 °C

Alternative construction: * Customized over-mold

* Customer specific alternatives available

Pin Assignment



1	2	3	4	5	6
I_2	V_2	T_2	T_1	V_1	I_1

I: applied current V: measured voltage T: temperature sensor

Order Information - 6W (Ni/Pt wires, Ø 0.2 mm)

Size	Dimensions (L x W x H / H2 in mm)	F0.3 (class B)	F0.6 (class C)
------	--------------------------------------	----------------	----------------

Nominal resistance: 1000 Ω at 0 °C

155	14.9 x 5.5 x 0.65 / 1.2	LFS1K0.155.6W.B.010	LFS1K0.155.6W.C.010
Order code		390.00030	390.00039



INNOVATIVE SENSOR TECHNOLOGY

Innovative Sensor Technology IST AG, Stegrütistrasse 14, CH-9642 Ebnat-Kappel, Switzerland,
Phone: +41 (0) 71 992 01 00 | Fax: +41 (0) 71 992 01 99 | E-mail: info@ist-ag.com | Web: www.ist-ag.com



All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved