

ADJUSTABLE LOW DROPOUT VOLTAGE REGULATOR WITH ON/OFF CONTROL


■ GENERAL DESCRIPTION

The NJM2387 is an adjustable low dropout voltage regulator with ON/OFF control.

The output current is up to 1.0A and dropout voltage is 0.2V typ. at $I_o=0.5A$.

The NJM2387 is suitable for power module, TV, Display, car stereo and low power applications.

■ PACKAGE OUTLINE




NJM2387DL2

■ FEATURE

- Low Dropout Voltage $\Delta V_{I-O}=0.2V$ typ. at $I_o=0.5A$
- Output Current $I_o(\text{max.})=1.0A$
- Reference Voltage $V_{\text{ref}}=1.26V \pm 2\%$
- With ON/OFF Control
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline TO-252-5

■ PIN CONFIGURATION



PIN FUNCTION

1. V_{IN}
2. ON/OFF CONTROL "H" or OPEN: ON
"L": OFF
3. V_{OUT}
4. V_{ADJ}
5. GND

NJM2387

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	+35	V
Control Voltage	V _{CONT}	+35(*note 1)	V
Adjust Terminal Voltage	V _{ADJ}	+6	V
Output Current	I _o	1.0	A
Power Dissipation	P _D	10(Tc=25°C) / 1(Ta≤25°C)	W
Operating Junction Temperature Range	T _j	-40 ~ +150	°C
Operating Temperature Range	T _{opr}	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-50 ~ +150	°C

(*note 1): When input voltage is less than +35V, the absolute maximum control voltage is equal to the input voltage.


■ ELECTRICAL CHARACTERISTICS (V_{IN}=15V, V_O=10V, I_o=0.5A, R₁=1kΩ, C_{IN}=0.33μF, C_o=22μF, T_j=25°C)

Measurement is to be conducted is pulse testing.

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input Voltage	V _{IN}		3.8	-	35	V
Output Voltage	V _o		1.5	-	20	V
Reference Voltage	V _{ref}		1.235	1.26	1.285	V
Line Regulation	ΔV _o -V _{IN}	V _{IN} =V _O +1V ~ V _O +17V	-	0.04	0.16	%/V
Load Regulation	ΔV _o -I _o	V _{IN} =V _O +2V, I _o =0A ~ 1.0A	-	0.2	1.4	%/A
Average Temperature Coefficient of Output Voltage	ΔV _o /ΔT	T _j =0 to 125°C	-	± 0.02	-	%/°C
Standby Current	I _Q	I _o =0A	-	-	5	mA
Dropout Voltage	ΔV _{I-O}	I _o =0.5A	-	0.2	0.5	V
Ripple Rejection	RR	V _{IN} =V _O +2V e _{in} =0.5V _{rms} , f=120Hz	52	65	-	dB
ON Control Voltage(*note 2)	V _{CONT(ON)}		2.0	-	-	V
OFF Control Voltage	V _{CONT(OFF)}		-	-	0.4	V
ON Control Current	I _{CONT(ON)}	V _C =2.7V	-	-	20	μA
OFF Control Current	I _{CONT(OFF)}	V _C =0.4V	-	-	-20	μA

(*note 2): When ON/OFF CONTROL Terminal is open ,Output Voltage is ON.

■ TEST CIRCUIT

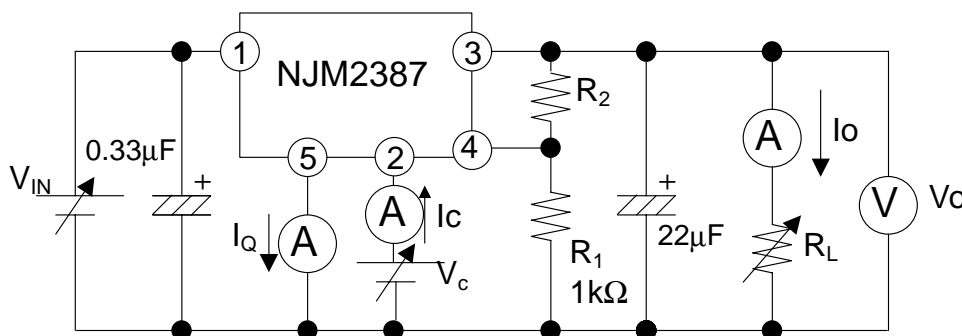

$$V_o = V_{ref} \times (1 + R_2/R_1)$$

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.