

DC Blocks

0.0001 to 18 GHz




FREQUENCY RANGE (GHz)	INSERTION LOSS (DB) MAX.	VOLTAGE (VOLTS) MAX.	VSWR MAX.	P/N
0.0001-4.0	0.5	50	1.20:1	BBT-01-410
0.0001-4.0	0.6	100	1.25:1	BBT-02-410
0.001-6.0	0.5	50	1.20:1	BBT-03-410
0.001-6.0	0.7	100	1.30:1	BBT-04-410
6.0-12.4	0.5	100	1.35:1	BBT-06-*
6.0-12.4	0.7	500	1.50:1	BBT-07-*
0.3-18.0	0.5	50	1.30:1	BBT-05-*

Custom frequency bands and optimized specifications available.

Notes:

* Call for Outline

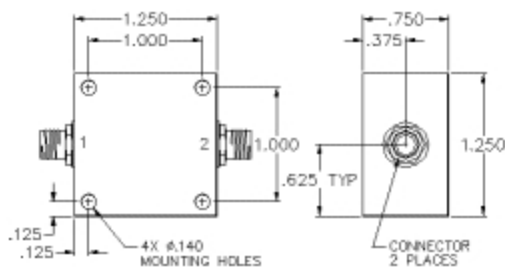

Outline 410



60/40 Solder Available