



Surround processor with Dolby Pro Logic Surround Decoder

DESCRIPTION

The NJW1103A is a Dolby Pro Logic Surround processor which contains all of the necessary functions of Pro Logic decoder include time delay.


Features include not only Dolby Pro Logic but also other surround such as Matrix, Hall, etc. and echo and mic mixing function for karaoke.

Dolby and double-D symbol are trademarks of Dolby Laboratories Licensing Corporation. San Francisco, CA94103-4813.USA.

This device is available only to licensees of Dolby Lab.

Licensing and application information may be obtained from Dolby Lab.

PACKAGE OUTLINE

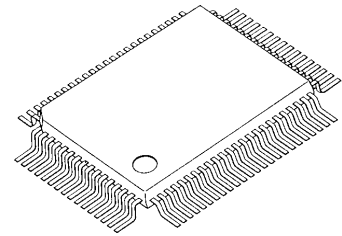

NJW1103AFC3

FEATURES

- Operating Voltage $V_{CC}=9V(\text{Analog}), V_{DD}=5V(\text{Digital})$
- Digital Delay on Chip
- Cch, Sch Channel Level Trimmer
- Digital Noise Sequencer
- Karaoke Function (Echo, Mic Mixing)
- Serial Data Interface (DATA, REQ, SCK)
- Bi-CMOS Technology
- Package QFP80-C3

FUNCTION

Dolby Pro Logic Surround

- Automatic input balance
- Digital Noise sequencer
- Adaptive matrix
- Center channel control (wideband, normal, phantom)
- Modified B-type noise reduction
- 7kHz low-pass filter
- Dolby 3 stereo mode
- Digital time delay


Other Surround

- Sound field control
- Front mixing control
- Digital time delay

Karaoke


- Echo control
- Mic mixing

BLOCK DIAGRAM

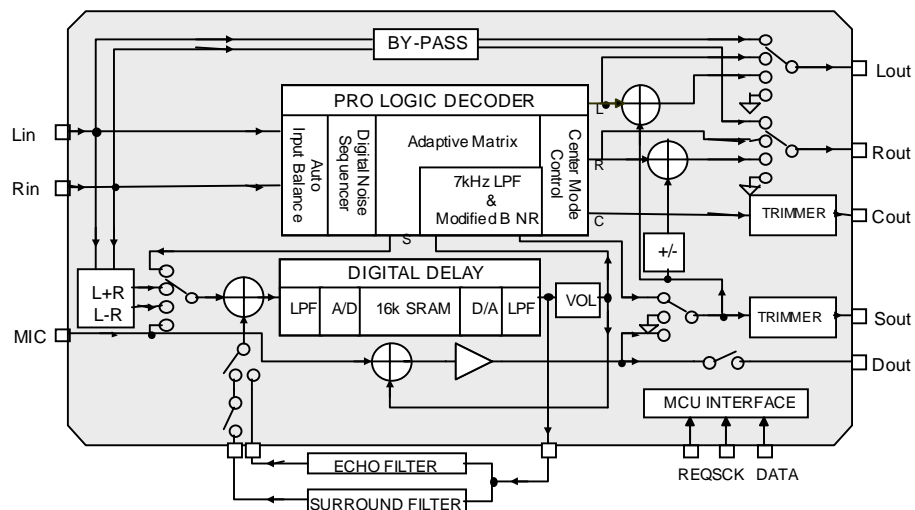

NJW1103A

PACKAGE OUTLINE (QFP80-C3)

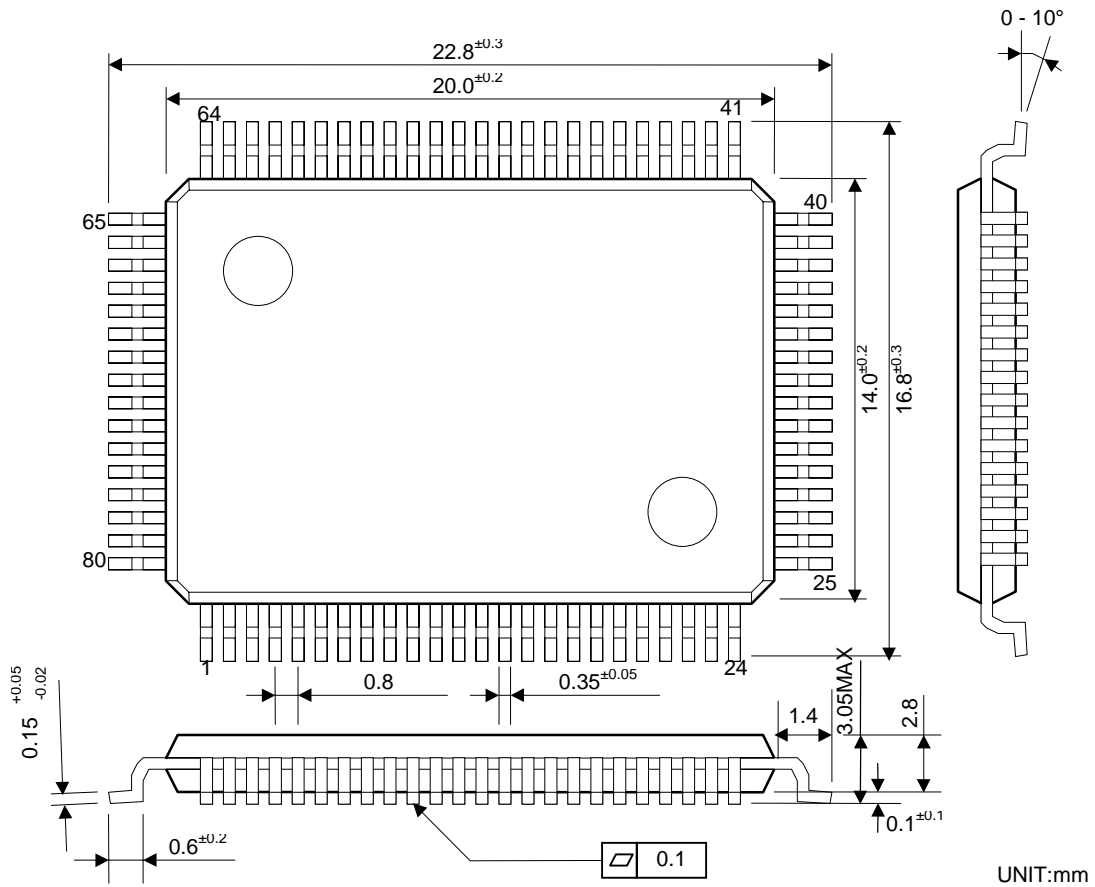

Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name
1	FILTER	21	XIN	41	VOL OUT	61	RLC4
2	LOUT	22	XOUT	42	DELAYSIG IN	62	RLC7
3	ROUT	23	DVSS	43	DELAYSIG OUT	63	RLC3
4	CT	24	AVSS	44	FBIN EC	64	RLC8
5	COUT	25	AVDD	45	FBIN SU	65	RLC6
6	ST	26	VREFD	46	S'OUT	66	LLI
7	SOUT	27	MIX OUT	47	DBIN	67	LBPF
8	CMC	28	DELAY IN	48	LPIN	68	RLI
9	SMRO	29	LPF1 IN1	49	DBC1	69	RBPF
10	SMRI	30	LPF1 IN2	50	DBC2	70	LT
11	AGND	31	LPF1 OUT	51	DBC3	71	RT
12	MIC IN	32	AD INT IN	52	PSC3	72	LIN
13	DVDD	33	AD INT OUT	53	PSC6	73	RIN
14	TEST CNT	34	AD CONT	54	PSC2	74	HOLDC
15	DATA	35	DA CONT	55	PSC5	75	AVCC
16	SCK	36	DA INT IN	56	PSC1	76	VREFA
17	REQ	37	DA INT OUT	57	PSC4	77	VREFG
18	LO1	38	LPF2 IN1	58	RLC5	78	IREF
19	LO2	39	LPF2 IN2	59	RLC2	79	REF OUT
20	LO3	40	LPF2 OUT	60	RLC1	80	NSQ

■ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	11	V
	V _{DD}	7	V
Power Dissipation	P _d	1.37	W
Operating Temperature Range	T _{opr}	-20 to +75	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

■ELECTRICAL CHARACTERISTICS (V_{CC} = 10V, V_{DD} = 5V, Ta = 25°C, Vin = 300mVrms, f = 1kHz)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
◆OVERALL							
Supply Voltage	V _{CC}		8	9	10	V	
	V _{DD}		4.5	5	5.5		
Supply Current	I _{CC}	No Signal	-	25	-	mA	
	I _{DD}	No Signal	-	25	-		
Reference Voltage	V _{REF}	No Signal	3.5	4.0	4.5	V	
Threshold Voltage	V _{thh}	Digital Input: High	0.7 V _{DD}	-	V _{DD}	V	
	V _{thl}	Digital Input: Low	0.0	-	0.3 V _{DD}		
◆INPUT AUTO BALANCE							
Capture Range	CPR		-	±5	-		
Error Correction	CER		-	±4	-		
◆ADAPTIVE MATRIX							
Output Level Accuracy Relative to Cch	ρVol	L,R,S'ch Output	-0.5	0	0.5	dB	
Matrix Rejection Relative Headroom	MR	L,R,S'ch Output	25	40	-	dB	
Total Harmonic Distortion	HR-AM	V _{CC} = 9V, THD = 1%	15	17	-	dB	
	THD-AM	L,R,C,S'ch Output at 4ch Mode	-	0.05	0.2	%	
Signal to Noise Ratio	SN-AM	L,R,ch Output at 2ch Mode	-	0.002	0.05	%	
		Rg=0, wt:CCIR/ARM, 4ch L,R,ch Output, at 2ch Mode	75	80	-	dB	
			93	100	-	dB	
◆NOISE SEQUENCER							
Output Noise Level	Vno		-15.0	-12.5	-10.0	dB	
Output Noise Level Accuracy relative to Cch	ρVno	L,R,S'ch Output	-0.5	0.0	0.5	dB	
◆MODIFIED B-TYPE NOISE REDUCTION							
Voltage Gain	GV-NR	vin=0dBd, f=100Hz	-	9.2	-	dB	
Decode Response	DEC1	vin=0dBd, f=1kHz	-1.6	-0.1	1.4	dB	
	2	DEC2	vin=-15dBd, f=1.4kHz	-3.0	-1.5	0.0	dB
	3	DEC3	vin=-20dBd, f=1.4kHz	-4.9	-3.4	-1.9	dB
	4	DEC4	vin=-40dBd, f=5kHz	-6.8	-5.3	-3.8	dB
Total Harmonic Distortion	THD-NR	vin=0dBd, f=1kHz	-	0.07	0.3	%	
Headroom	HRNR	V _{CC} = 9V, THD = 1%	15	17	-	dB	
Signal to Noise Ratio	SNNR	Rg=0, weightted:CCIR/ARM	73	78	-	dB	

NJW1103A

■ELECTRICAL CHARACTERISTICS ($V_{CC} = 10V$, $V_{DD} = 5V$, $T_a = 25^\circ C$, $V_{in} = 300mV_{rms}$, $f = 1kHz$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
◆OTHER SURROUND							
Total Harmonic Distortion	THD-OS	$v_{in}=0dBd$, $f=1kHz$ L+R,L-R Output	-	0.05	0.2	dB	
Headroom	HR-OS	$V_{CC}=9V$, THD=1% L+R,L-R Output	15	17	-	dB	
Signal to Noise Ratio	SN-OS	$R_g=0$, weighted:CCIR/ARM L+R,L-R Output	85	90	-	dB	
◆Cch, Sch TRIMMER							
Full Scale	FS	Digital Input = -31dB	-25	-31	-37	dB	
Trimmer Step	NL	Digital Input = -1, -2, -4, -8, -16dB	-0.6	1.0	1.4	dB	
◆DIGITAL TIME DELAY							
Delay Time	Td		12.4	15.4	18.4	ms	
			17.0	20.0	23.0	ms	
			25.6	28.6	31.6	ms	
			38.0	41.0	44.0	ms	
			46.2	49.2	52.2	ms	
			137.5	147.5	157.5	ms	
			186.6	196.6	206.6	ms	
Total Gain	Gv		-3.0	0.0	3.0	dB	
Total Harmonic Distortion	THD	30kHz LPF	Td=15.4ms	-	0.3	0.6	%
			Td=20.0ms	-	0.3	0.6	%
			Td=28.6ms	-	0.5	1.0	%
			Td=41.0ms	-	0.6	1.2	%
			Td=49.2ms	-	0.7	1.4	%
			Td=147.5ms	-	1.5	3.0	%
			Td=196.6ms	-	2.0	4.0	%
Maximum Output Voltage	Vomax	30kHz LPF, THD=10%	0.7	1.0	-	Vrms	
Output Noise Voltage	No	$R_g=620\Omega$ $v_{in}=0V_{rms}$ JIS-A	Td=15.4ms	-	-92	-80	dBV
			Td=20.0ms	-	-92	-80	dBV
			Td=28.6ms	-	-92	-80	dBV
			Td=41.0ms	-	-90	-75	dBV
			Td=49.2ms	-	-90	-75	dBV
			Td=147.5ms	-	-82	-67	dBV
			Td=196.6ms	-	-77	-62	dBV
◆ DELAY VOLUME							
Total Gain	Gv	Vol. = Max	0	3	6	dB	
Maximum Attenuation	ATTmax	Delay Off Mode, Vol=Min, JIS-A	0	-70	-60	dB	

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382