


Astec: Open Loop Type Current Sensor

Astec Open Loop Type Current Sensors

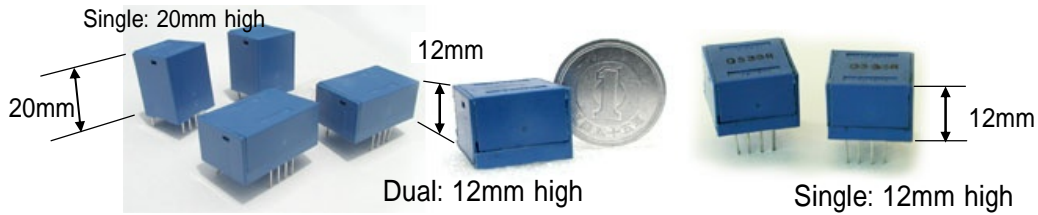

Type: Open Loop Type with Hall Effect, Core Material: Permalloy
Rated Current: 1.5A ~ 30A
Connection: Mounting on P.C. Board
Output: Single or Dual
Dimension: Single: Ordinary Type 15 x 15 x 20mm (Hight 20mm), Compact Type 16 x 16 x 12mm (Hight 12mm)
 Dual: 12 x 26 x 12mm (Hight 12mm)
Application Servomotor Driver, AC Variable Speed Motor, DC Motor Driver, Inverter
 Buttery Power Supply, Robot Arm, Broadcasting System, Chipmouter, Door Movement Control & others.

Part Numbers for Orders

SC □ XX □ □ □	→	Series	D	Single	Output Number
			L	Dual	
	→	Rated Current	1R5	1.5A	Rated Input Current
			03	3A	
			05	5A	
			10	10A	
			15	15A	
		20	20A		
		30	30A		
→	Current Polar	R	±	Bipolar Input Current	
		N	+	Unipola Input Current	
→	Input Voltage	A	± 15V	AC Input Current	
		B	± 12V		
		T	± 5V		
		S	+ 12V	DC Input Current	
		U	+ 5V		
		C	+ 15V		
→	Property & Size	P		Ordinary	
		H		Low Noise	
		E		High Voltage Withstand.	
		S		12mm High	
		(SCL Series are 12mm high.)			

Please send an E-Mail for further information.

Astec Co., Ltd. (Taiho Products, Co.,Ltd.)
Tokyo Sales

E-Mail : taihopro@tohgoqu.or.jp
E-Mail : m.ogawa-int@parkcity.ne.jp