


DATA SHEET

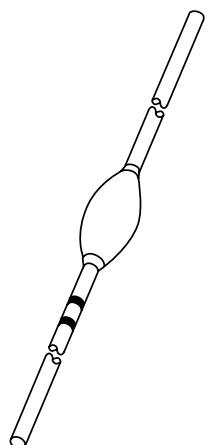

BY8400 series

Fast high-voltage soft-recovery rectifiers

Product specification
Supersedes data of June 1994

1996 May 24

Fast high-voltage soft-recovery rectifiers**BY8400 series****FEATURES**

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Soft-recovery switching characteristics
- Compact construction.

APPLICATIONS

- For colour television and monitors up to 25 kHz
- High-voltage applications for:
 - Multipliers
 - Slot-wound diode-split-transformers.

DESCRIPTION

Rugged glass package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

The package is designed to be used in an insulating medium such as resin, oil or SF₆ gas.

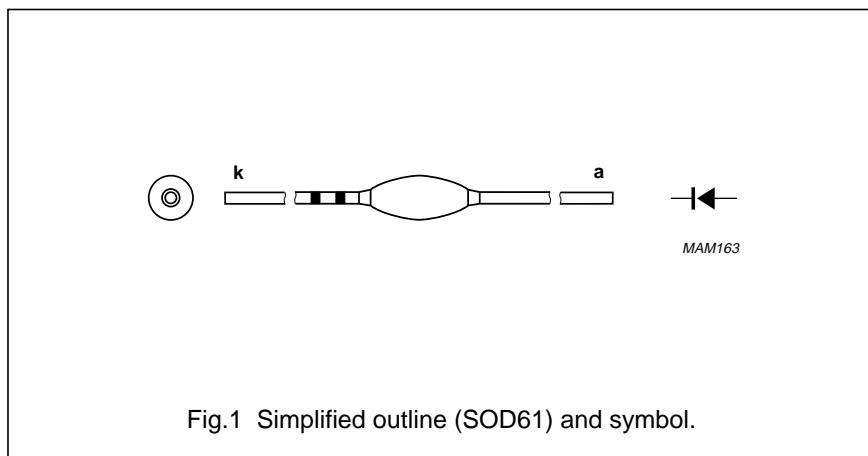


Fig.1 Simplified outline (SOD61) and symbol.

MARKING**Cathode band colour codes**

TYPE NUMBER	PACKAGE CODE	INNER BAND	OUTER BAND
BY8404	SOD61AB	black	black
BY8406	SOD61AC	black	green
BY8408	SOD61AD	black	red
BY8410	SOD61AE	black	violet
BY8412	SOD61AF	black	orange
BY8414	SOD61AG	black	lilac
BY8416	SOD61AH	black	grey
BY8418	SOD61AI	black	brown
BY8420	SOD61AJ	black	dark blue
BY8424	SOD61AK	black	no band

Fast high-voltage soft-recovery rectifiers

BY8400 series

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RSM}	non-repetitive peak reverse voltage BY8404		–	5	kV
	BY8406			8	kV
	BY8408			10	kV
	BY8410			12	kV
	BY8412			14	kV
	BY8414			17	kV
	BY8416			19	kV
	BY8418			22	kV
	BY8420			24	kV
	BY8424			30	kV
V_{RRM}	repetitive peak reverse voltage BY8404		–	5	kV
	BY8406			8	kV
	BY8408			10	kV
	BY8410			12	kV
	BY8412			14	kV
	BY8414			17	kV
	BY8416			19	kV
	BY8418			22	kV
	BY8420			24	kV
	BY8424			30	kV
V_{RW}	working reverse voltage BY8404		–	4	kV
	BY8406			6	kV
	BY8408			8	kV
	BY8410			10	kV
	BY8412			12	kV
	BY8414			14	kV
	BY8416			16	kV
	BY8418			18	kV
	BY8420			20	kV
	BY8424			24	kV

Fast high-voltage soft-recovery rectifiers

BY8400 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$I_{F(AV)}$	average forward current BY8404	averaged over any 20 ms period; see Figs 2 to 11	–	20	mA
	BY8406			10	mA
	BY8408			5	mA
	BY8410			5	mA
	BY8412			5	mA
	BY8414			5	mA
	BY8416			3	mA
	BY8418			3	mA
	BY8420			3	mA
	BY8424			3	mA
I_{FRM}	repetitive peak forward current	note 1	–	500	mA
T_{stg}	storage temperature		–65	+120	°C
T_j	junction temperature		–65	+120	°C

Note

- Withstands peak currents during flash-over in a picture tube.

Fast high-voltage soft-recovery rectifiers

BY8400 series

ELECTRICAL CHARACTERISTICS $T_j = 25^\circ\text{C}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	forward voltage BY8404	$I_F = 100 \text{ mA}; T_j = T_{j \max};$ see Figs 12 to 21	—	—	20	V
	BY8406		—	—	25	V
	BY8408		—	—	35	V
	BY8410		—	—	42	V
	BY8412		—	—	52	V
	BY8414		—	—	60	V
	BY8416		—	—	70	V
	BY8418		—	—	77	V
	BY8420		—	—	88	V
	BY8424		—	—	98	V
I_R	reverse current	$V_R = V_{RW\max}; T_j = 120^\circ\text{C}$	—	—	3	μA
Q_r	recovery charge	when switched from $I_F = 100 \text{ mA}$ to $V_R \geq 100 \text{ V}$ and $dI_F/dt = -200 \text{ mA}/\mu\text{s}$; see Fig.22	—	—	1	nC
t_f	fall time	when switched from $I_F = 100 \text{ mA}$ to $V_R \geq 100 \text{ V}$ and $dI_F/dt = -200 \text{ mA}/\mu\text{s}$; see Fig.22	100	—	—	ns
t_{rr}	reverse recovery time	when switched from $I_F = 2 \text{ mA}$ to $I_R = 4 \text{ mA}$; measured at $I_R = 1 \text{ mA}$; see Fig.23	—	—	100	ns
C_d	diode capacitance BY8404	$V_R = 0 \text{ V}; f = 1 \text{ MHz}$	—	1.20	—	pF
	BY8406		—	0.80	—	pF
	BY8408		—	0.60	—	pF
	BY8410		—	0.50	—	pF
	BY8412		—	0.40	—	pF
	BY8414		—	0.35	—	pF
	BY8416		—	0.30	—	pF
	BY8418		—	0.28	—	pF
	BY8420		—	0.28	—	pF
	BY8424		—	0.28	—	pF

Fast high-voltage soft-recovery rectifiers

BY8400 series

GRAPHICAL DATA

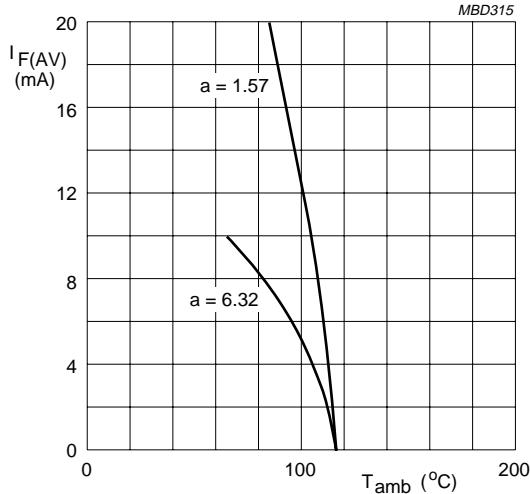
**BY8404.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.2 Maximum permissible average forward current as a function of ambient temperature.

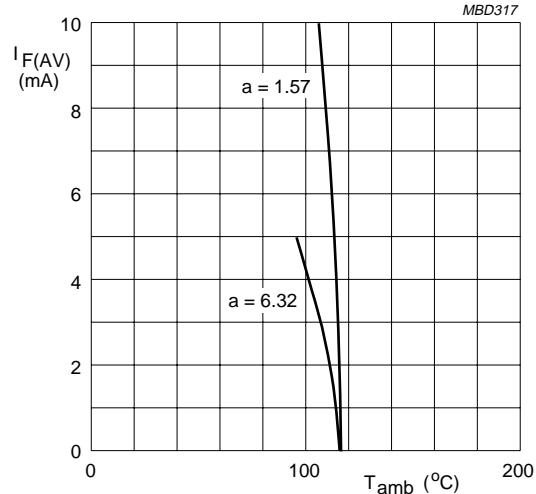
**BY8406.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.3 Maximum permissible average forward current as a function of ambient temperature.

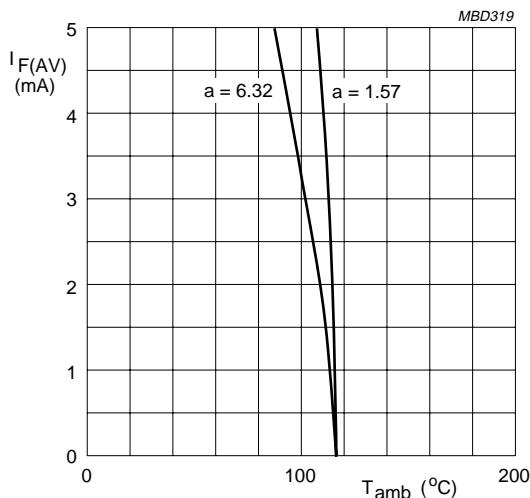
**BY8408.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.4 Maximum permissible average forward current as a function of ambient temperature.

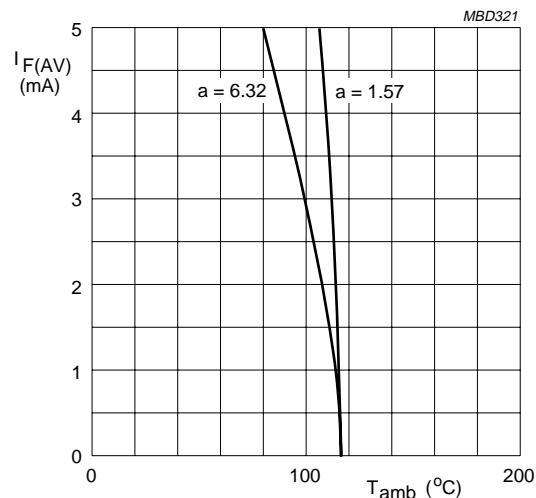
**BY8410.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.5 Maximum permissible average forward current as a function of ambient temperature.

Fast high-voltage soft-recovery rectifiers

BY8400 series

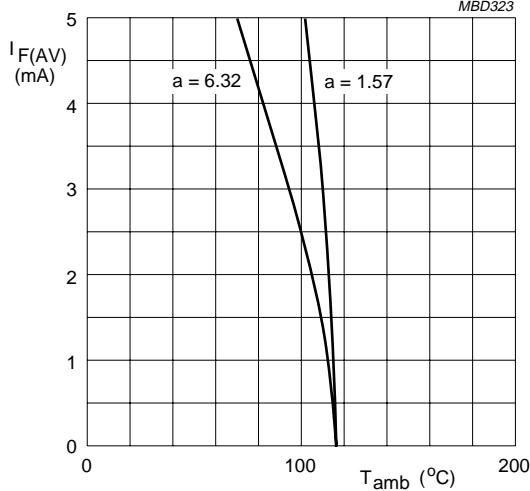
**BY8412.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.6 Maximum permissible average forward current as a function of ambient temperature.

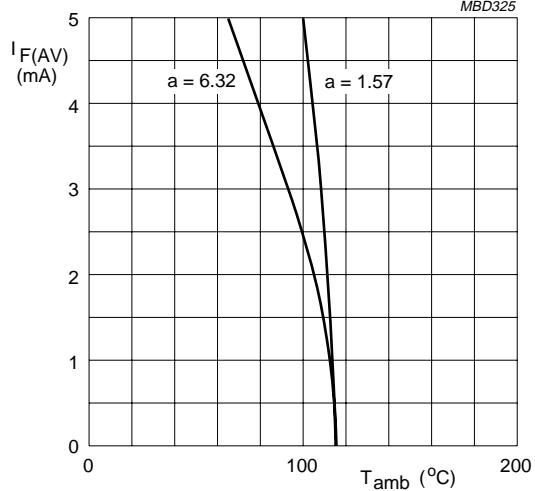
**BY8414.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.7 Maximum permissible average forward current as a function of ambient temperature.

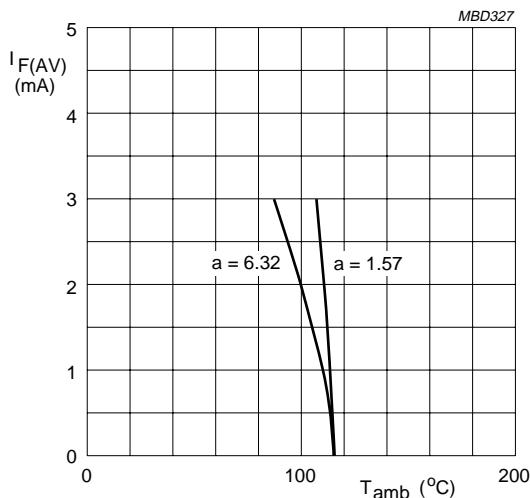
**BY8416.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.8 Maximum permissible average forward current as a function of ambient temperature.

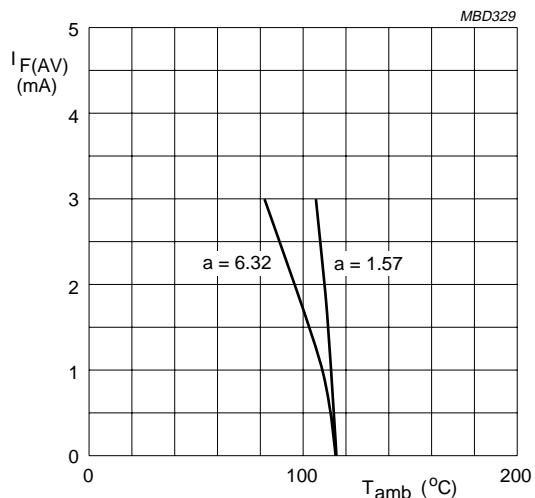
**BY8418.** $a = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120 \text{ K/W}$. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.9 Maximum permissible average forward current as a function of ambient temperature.

Fast high-voltage soft-recovery rectifiers

BY8400 series

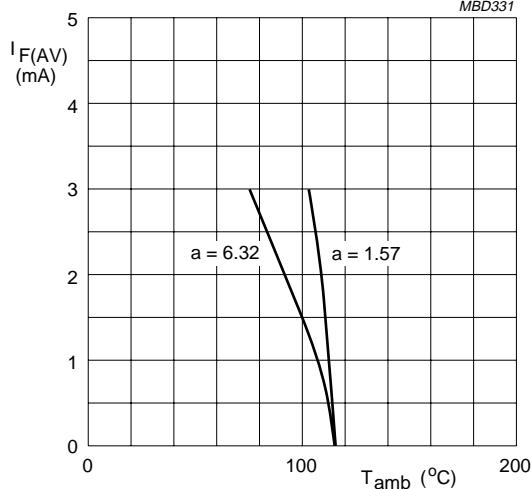
**BY8420.** $a = I_{F(RMS)} / I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120$ K/W. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.10 Maximum permissible average forward current as a function of ambient temperature.

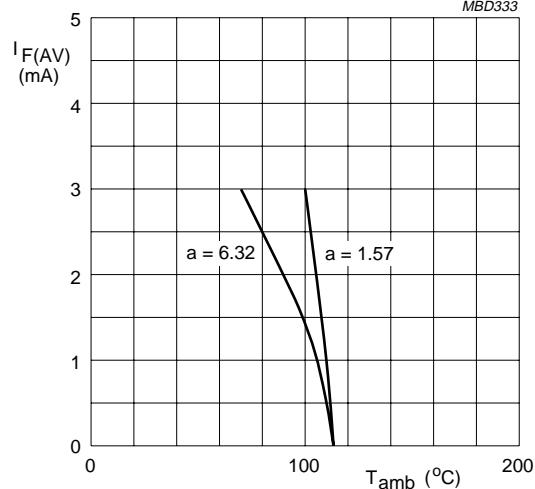
**BY8424.** $a = I_{F(RMS)} / I_{F(AV)}$; $V_R = V_{RWmax}$; $R_{th,j-a} \leq 120$ K/W. $a = 1.57$: half sinewave. $a = 6.32$: line output transformer application; see Fig.24.

Fig.11 Maximum permissible average forward current as a function of ambient temperature.

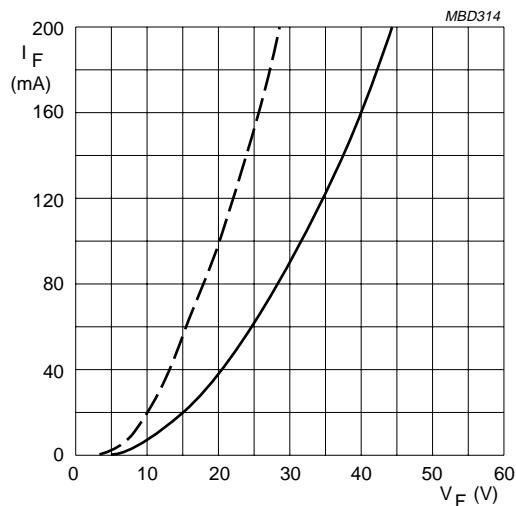
**BY8404.**Dotted line: $T_j = 120$ $^{\circ}$ C.Solid line: $T_j = 25$ $^{\circ}$ C.

Fig.12 Forward current as a function of maximum forward voltage.


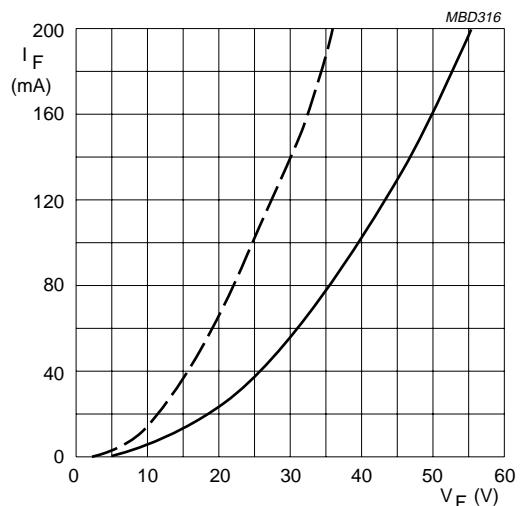
**BY8406.**Dotted line: $T_j = 120$ $^{\circ}$ C.Solid line: $T_j = 25$ $^{\circ}$ C.

Fig.13 Forward current as a function of maximum forward voltage.


Fast high-voltage soft-recovery rectifiers

BY8400 series

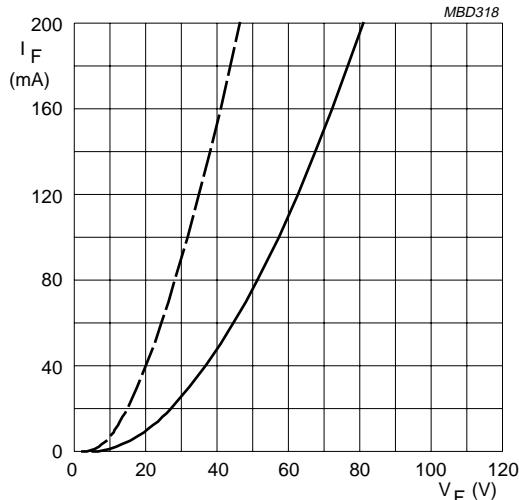


BY8408.
Dotted line: $T_j = 120^\circ\text{C}$.
Solid line: $T_j = 25^\circ\text{C}$.

Fig.14 Forward current as a function of maximum forward voltage.

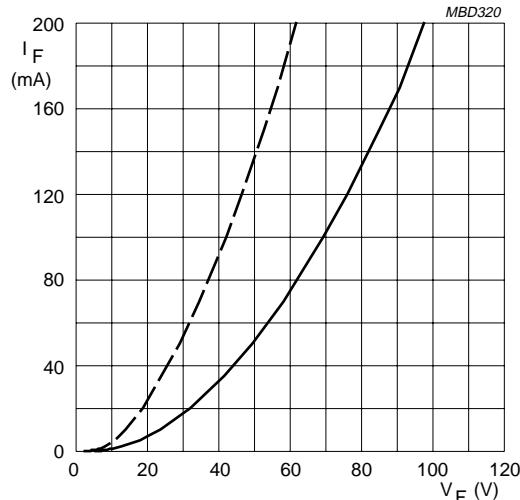


BY8410.
Dotted line: $T_j = 120^\circ\text{C}$.
Solid line: $T_j = 25^\circ\text{C}$.

Fig.15 Forward current as a function of maximum forward voltage.

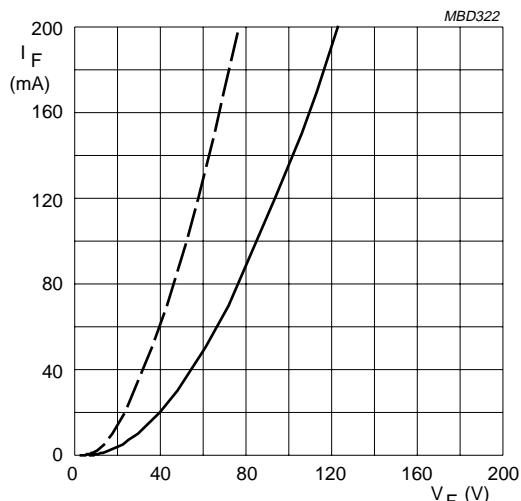

BY8412.
Dotted line: $T_j = 120^\circ\text{C}$.
Solid line: $T_j = 25^\circ\text{C}$.

Fig.16 Forward current as a function of maximum forward voltage.

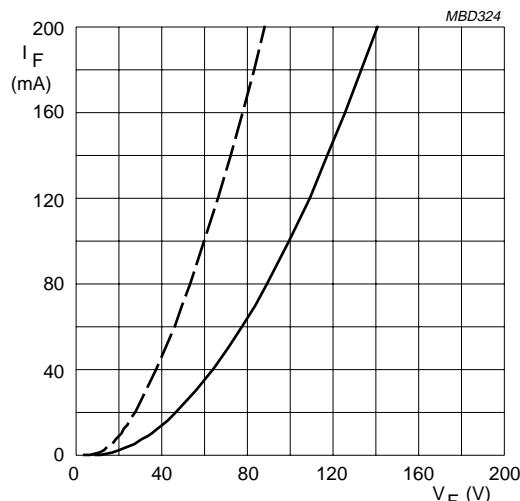


BY8414.
Dotted line: $T_j = 120^\circ\text{C}$.
Solid line: $T_j = 25^\circ\text{C}$.

Fig.17 Forward current as a function of maximum forward voltage.


Fast high-voltage soft-recovery rectifiers

BY8400 series

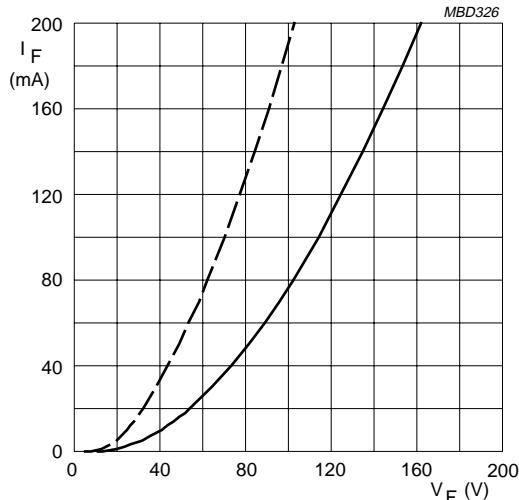


BY8416.
Dotted line: $T_j = 120^\circ C$.
Solid line: $T_j = 25^\circ C$.

Fig.18 Forward current as a function of maximum forward voltage.

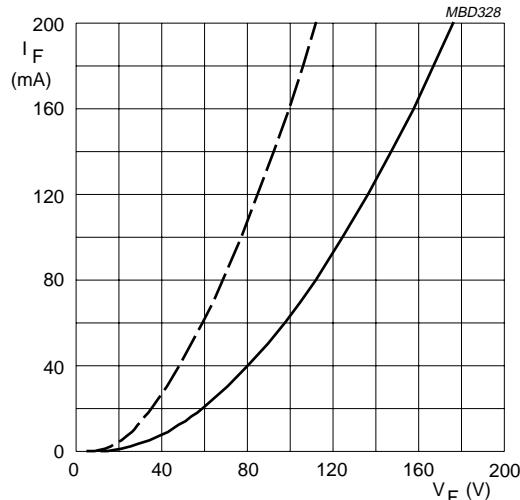


BY8418.
Dotted line: $T_j = 120^\circ C$.
Solid line: $T_j = 25^\circ C$.

Fig.19 Forward current as a function of maximum forward voltage.

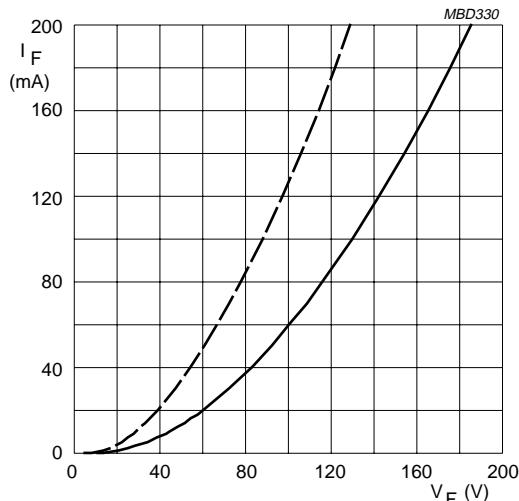

BY8420.
Dotted line: $T_j = 120^\circ C$.
Solid line: $T_j = 25^\circ C$.

Fig.20 Forward current as a function of maximum forward voltage.


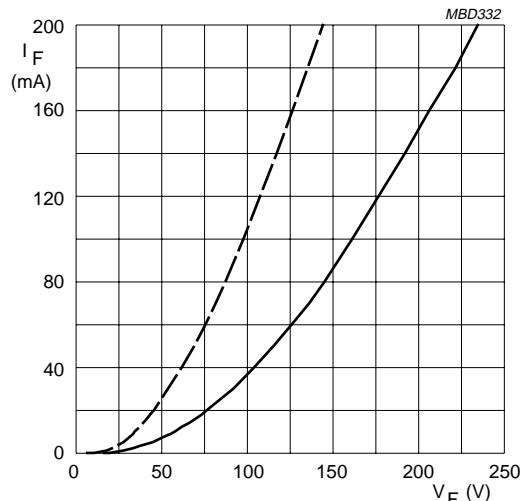


BY8424.
Dotted line: $T_j = 120^\circ C$.
Solid line: $T_j = 25^\circ C$.

Fig.21 Forward current as a function of maximum forward voltage.

Fast high-voltage soft-recovery rectifiers

BY8400 series

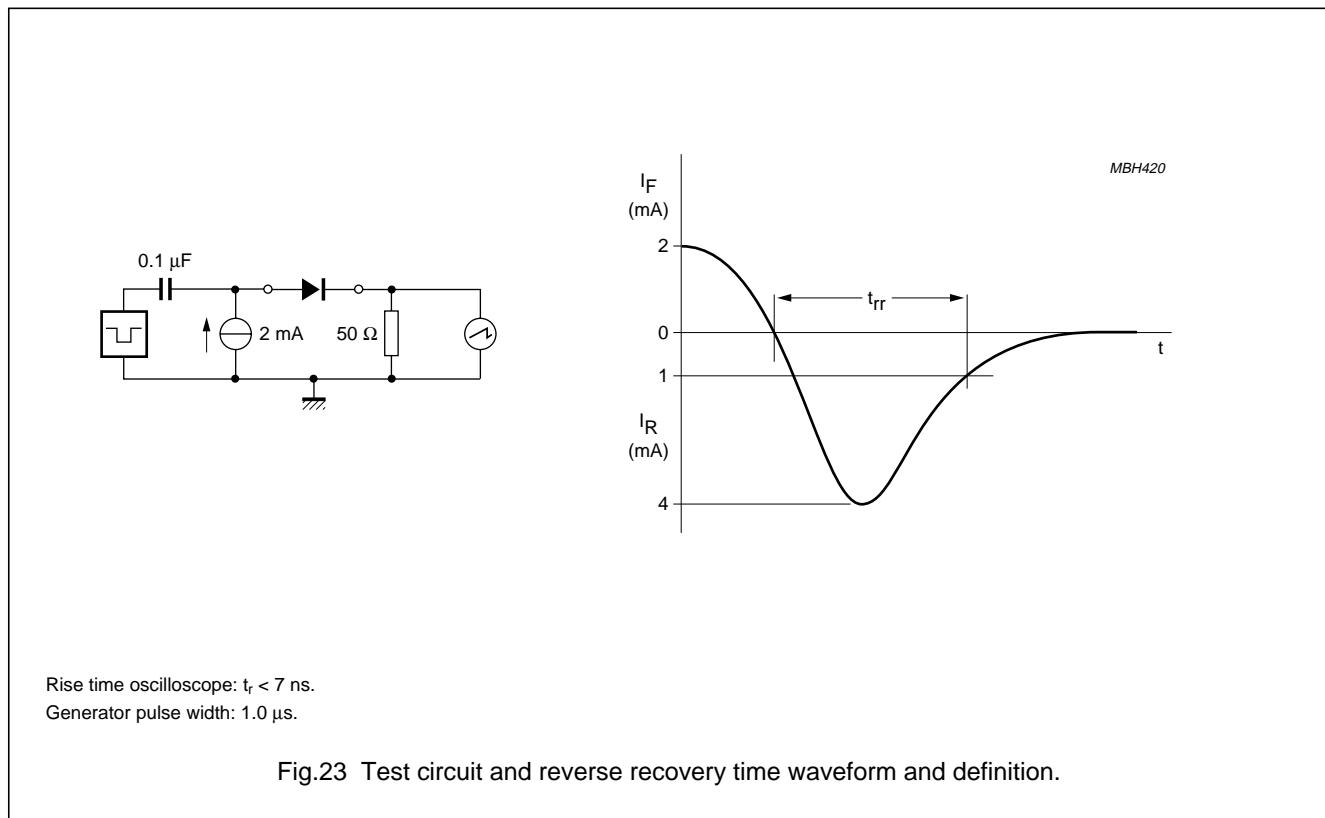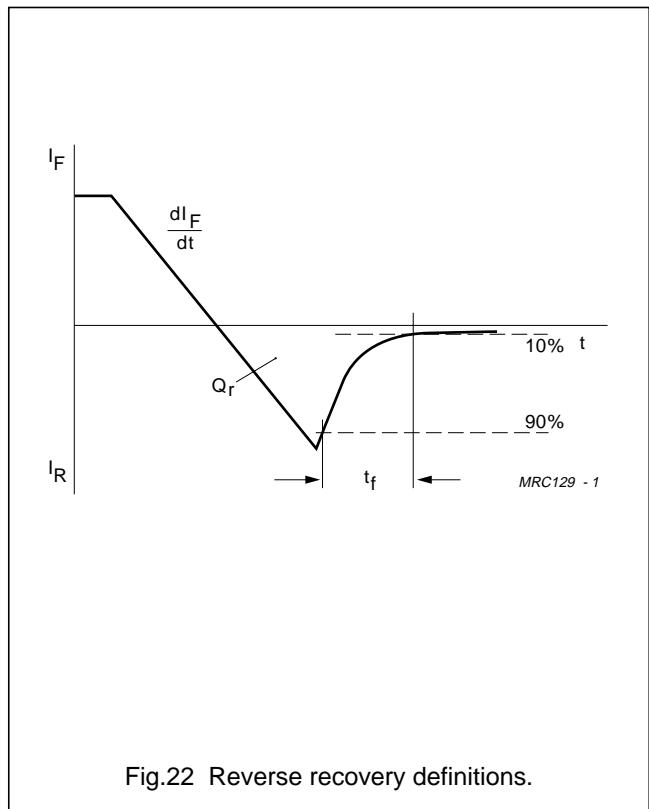

Fast high-voltage soft-recovery rectifiers

BY8400 series

APPLICATION INFORMATION


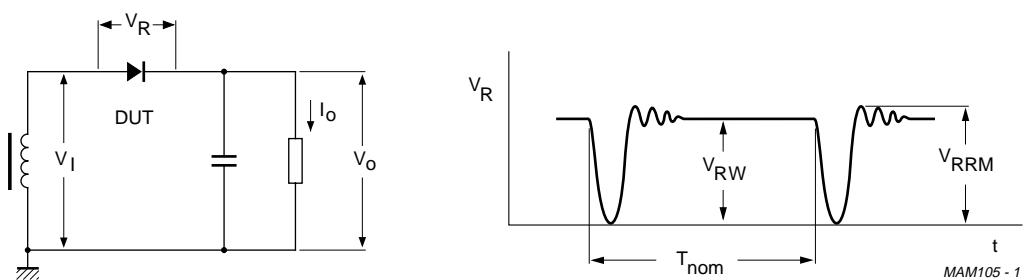


Fig.24 Typical operation circuit and voltage waveform.

Fast high-voltage soft-recovery rectifiers

BY8400 series

PACKAGE OUTLINE

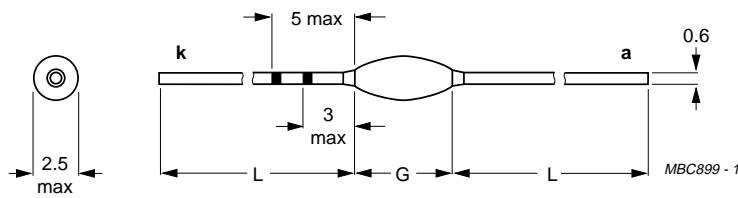

Dimensions in mm.

Fig.25 SOD61.

SOD61 package specification

TYPE NUMBER	PACKAGE CODE	L _{min} (mm)	G _{max} (mm)
BY8404	SOD61AB	31.8	5.5
BY8406	SOD61AC	30.4	8.3
BY8408	SOD61AD	30.2	8.7
BY8410	SOD61AE	30.0	9.1
BY8412	SOD61AF	29.8	9.5
BY8414	SOD61AG	29.6	9.9
BY8416	SOD61AH	29.3	10.5
BY8418	SOD61AI	28.8	11.5
BY8420	SOD61AJ	28.3	12.5
BY8424	SOD61AK	27.8	13.5

Fast high-voltage soft-recovery rectifiers**BY8400 series****DEFINITIONS**

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：<HTTP://www.rfoe.net/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN：SUNS8888@hotmail.com

邮编：518033 E-mail：szss20@163.com QQ：195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382