

AMPCON_HI


High sensitivity transmitter of photocurrent to 4-20mA current loop



The AMPCON converts a photocurrent into an output current between 4 and 20mA. The module is designed for integration into 4-20mA databusses.


The present module works with a high gain factor and converts a photocurrent of 18nA (adjustable +/-35%) to an output of 20mA. This means, a current higher than 18nA will cause saturation.

Other modules with medium gain (AMPCON_MED, up to 2,5µA) and low gain (AMPCON_LO, up to 250µA) are available. Alternatively, please refer to the below instruction for changing the gain.

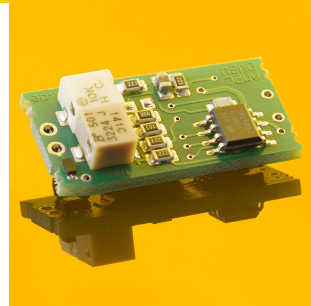


Input solder points	Photodiode Anode = positive terminal of the photodiode Photodiode Cathode = negative terminal of the photodiode
Power supply = output terminal solder points	A voltage of 24V is to be applied between V+ and GND. The resulting current between 4 and 20mA is the signal, which is proportional to the photocurrent.
Dimensions	W x L x H = 13 x 26 x 8mm
Operating temperature	-20...80°C
Storage temperature	-40...80°C
The signal offset and the amplification factor are adjustable with potentiometers. (see description)	
RoHS-compliant to 2002/95/EG.	

Connection:

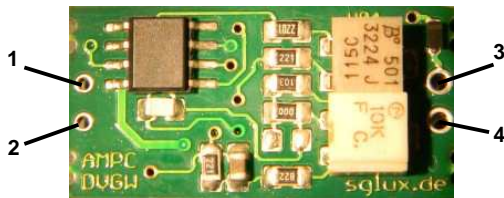

- | | |
|----------------------------|-----------------------------------|
| Input solder points | Power supply solder points |
| 1 Photodiode anode | 3 V+ power supply |
| 2 Photodiode cathode | 4 GND power supply |

How to change the gain:

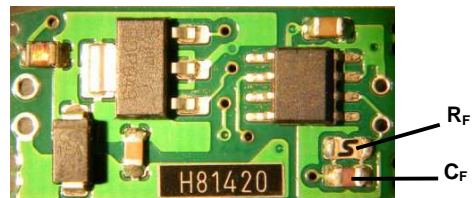

R_F and C_F might have another appearance than in the picture.
To change the gain (measurement range) in a larger scale, please change the feedback resistor R_F (the present value is 120 MΩ).
To calculate R_{Fnew} for the new resistor, please use this formula:

$$R_{Fnew}(in\ M\Omega) = 2160 / I_{max}(in\ nA)$$


I_{max} is the max. measurable photocurrent. It is adjustable +/- 35% with the potentiometer.
The capacitor C_F (the default value is 820pF) is influencing the time constant τ of the measurement system. The present time constant is approx. 10ms. It is calculated with the formula:

$$\tau(in\ ms) = C_F(in\ nF) * R_F(in\ M\Omega)$$

maximum ratings

$$5k\Omega < R_{Fnew} < 3G\Omega \text{ and } \tau > 1ms$$

Offset and gain fine adjustment:

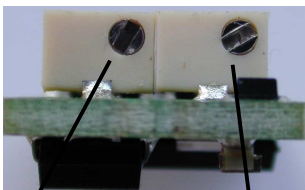

- | | |
|------------------------------|--------------------------------|
| gain adjustment | offset adjustment |
| turn left to raise the gain | turn right to raise the offset |
| turn right to lower the gain | turn left to lower the offset |