



# AMT8410

2.5 Gb/s 1310/1550nm PIN-TIA  
PRELIMINARY DATA SHEET - Rev 1.1

## FEATURES

- 2.5 Gb/s Differential Output TIA
- 3.3 V Operation
- Automatic Gain Control
- 55  $\mu\text{m}$  1270-1560 nm PIN Photodetector
- 2000 MHz Bandwidth
- -23 dBm Typical Sensitivity
- +2 dBm Optical Overload
- TO-46 Lens Package

## APPLICATIONS

- SONET OC-48/SDH STM-16 (2.488 Gb/s)
- 2 x Fibre Channel (2.125 Gb/s)
- 2.5 Gb/s Infiniband



## PRODUCT DESCRIPTION

The ANADIGICS AMT8410, packaged in a TO46 lens can, is a 3.3 V integrated photodetector and transimpedance amplifier (TIA) used to convert a long wavelength (1270 to 1560 nm) input optical signal into a differential output voltage. The

AMT8410 has a bandwidth of 2000 MHz and a dynamic range of 25 dB. These devices are readily designed into receivers, transceivers and transponders for SONET, Fibre Channel and Infiniband applications.

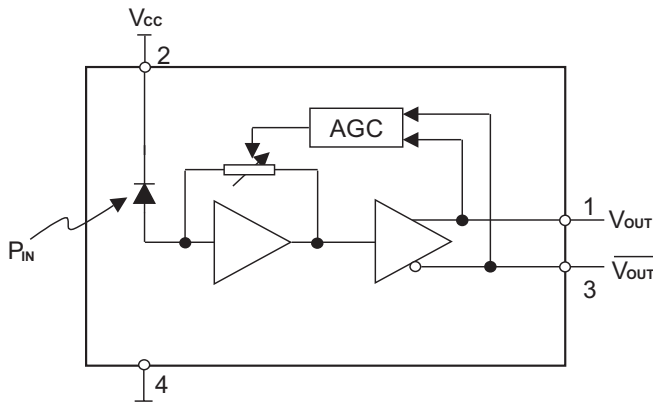


Figure 1: Funtional Block Diagram

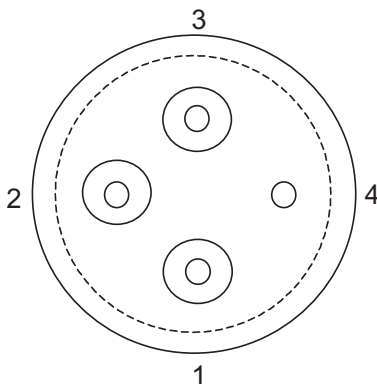


Figure 2: T46L Pinout (Bottom View)

Table 1: Pin Description

PIN	DESCRIPTION	COMMENT
1	$V_{OUT}$ - TIA Output Voltage (Non-Inverted)	Logical '1' with optical input
2	$V_{CC}$ - Positive Supply Voltage	+3.3 Volts
3	$\overline{V_{OUT}}$ - TIA Output Voltage (Inverted)	Logical '0' with optical input
4	Ground	Case is grounded

**ELECTRICAL CHARACTERISTICS****Table 2: Absolute Maximum Ratings**

V <sub>CC</sub>	6.0 V
P <sub>IN</sub>	+4 dBm
T <sub>s</sub>	Storage Temp. -65 °C to 125 °C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

**Table 3: Electrical Specifications**

PARAMETER	MIN	TYP	MAX	UNIT
Wavelength ( $\lambda$ )	1270	1300	1560	nm
Detector Active Area	-	55	-	$\mu\text{m}$
Small Signal Differential Responsivity (@ 100 MHz) <sup>(1)</sup>	1700	2000	-	V/W
Bandwidth <sup>(1)</sup>	1700	2000	-	MHz
Low Frequency Cutoff	-	100	-	kHz
Output Resistance	-	50	-	$\Omega$
Optical Overload <sup>(2)</sup>	0	+2	-	dBm
Optical Sensitivity <sup>(2)</sup>	-21	-23	-	dBm
Maximum Differential Output Voltage	-	-	300	mV
T <sub>RISE</sub> & T <sub>FALL</sub> (20 - 80%) <sup>(3)</sup>	-	160	-	ps
Duty Cycle Distortion <sup>(4)</sup>	-	6	-	%
Total Jitter <sup>(4), (5)</sup>	-	45	-	ps
Supply Current	-	55	100	mA
Operating Voltage Range	+3.0	+3.3	+3.6	V
Operating Temperature Range	-40	-	+85	°C

Notes:

(1) Measured at -17 dBm optical input power with output connected into  $R_L = 100 \Omega$  (differential).

(2) Measured at  $10^{-10}$  BER with a  $2^{23}-1$  PRBS at 2.5 Gb/s.


(3) Measured with a  $2^{23}-1$  PRBS at 2.5Gb/s, an input optical power of -17dBm and  $R_L = 100 \Omega$  (differential).

(4) Measured with a  $2^{23}-1$  PRBS at 2.5Gb/s, an input optical power of -3dBm and  $R_L = 100 \Omega$  (differential).

(5)  $6\sigma$  about the center eye crossing.


PERFORMANCE DATA

Figure 3: Eye Diagram with an Optical Input Power of -23 dBm

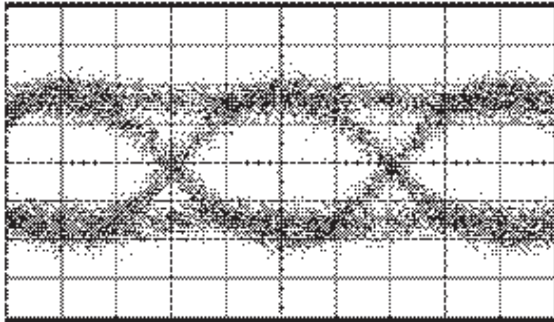

100 ps/Div. 5 mV/Div.

Figure 4: Eye Diagram with an Optical Input Power of -15 dBm

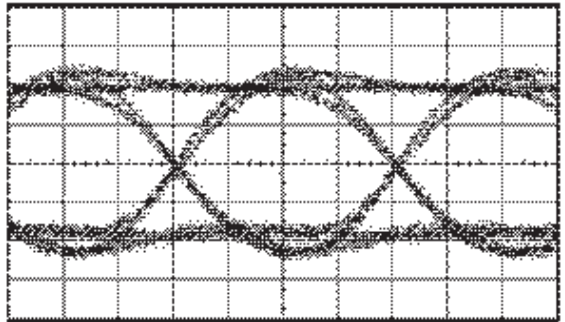

100 ps/Div. 25 mV/Div.

Figure 5: Supply Current vs. Case Temperature

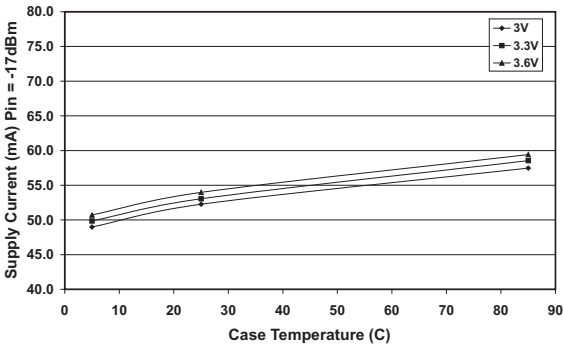


Figure 6: Bandwidth vs. Case Temperature

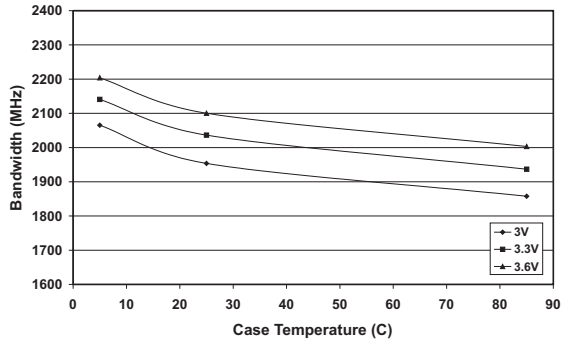


Figure 7: Differential Responsivity vs. Case Temperature



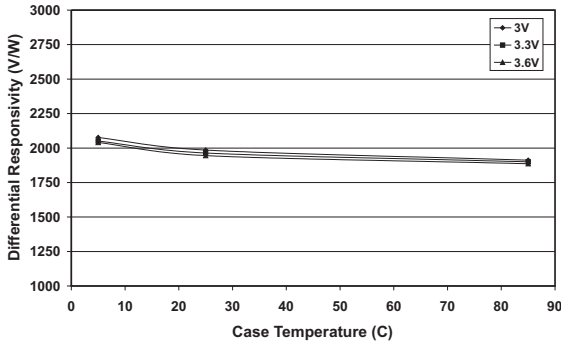



Figure 8: Sensitivity vs. Case Temperature

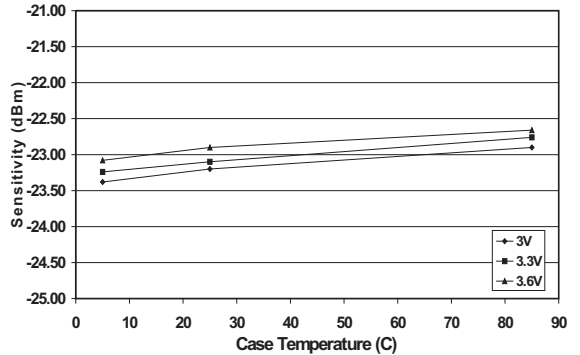


**MEASUREMENT METHODS**

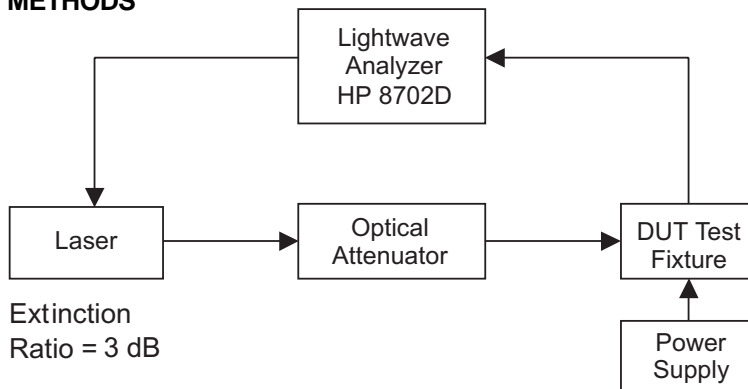

**Figure 9: Test Setup for Frequency Measurements**

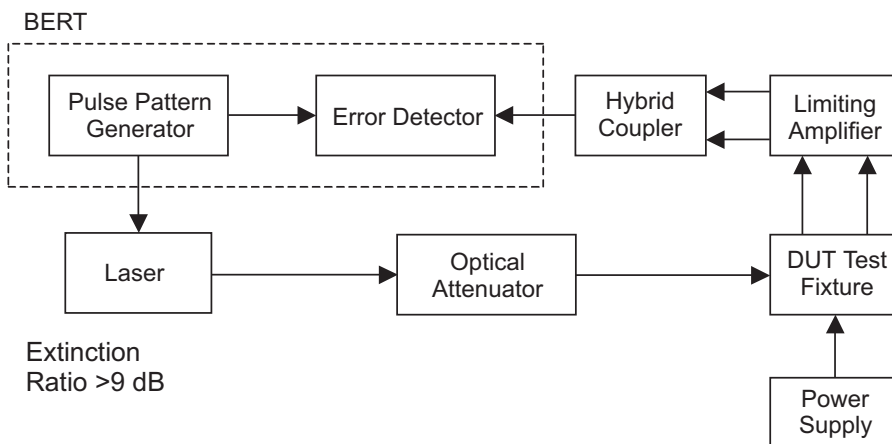

**Figure 10: Test Setup for Sensitivity Measurements**

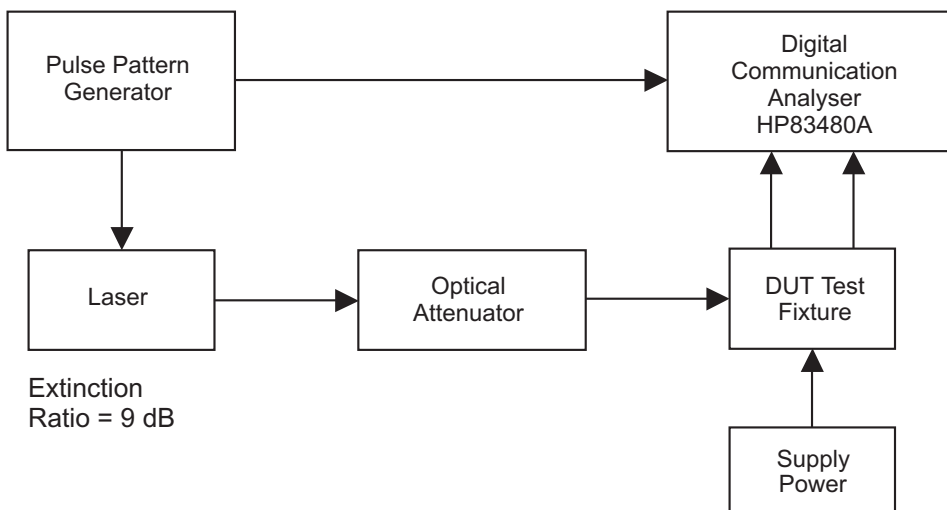

**Figure 11: Test Setup for Eye Measurements**


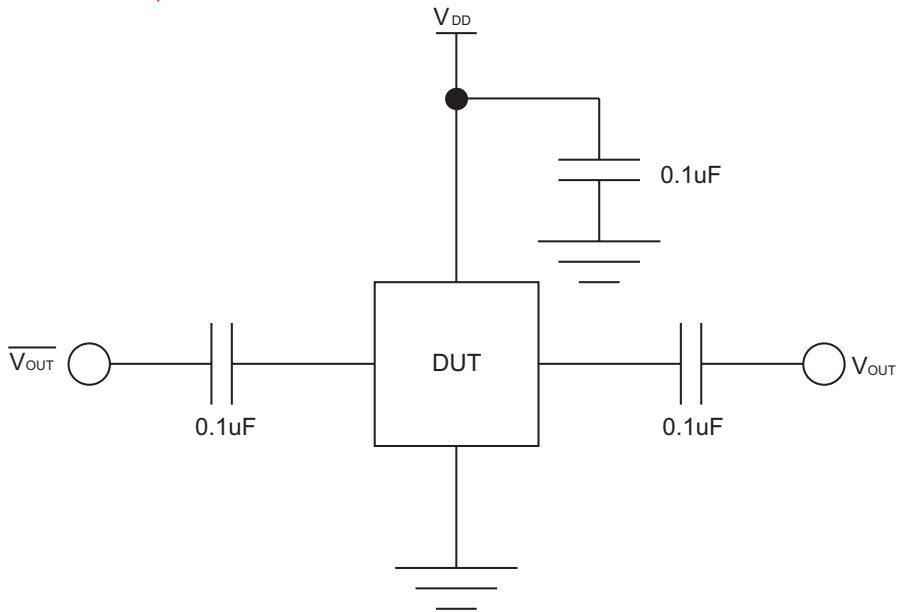


Figure 12: DUT Test Fixture Schematic

PACKAGE OUTLINE

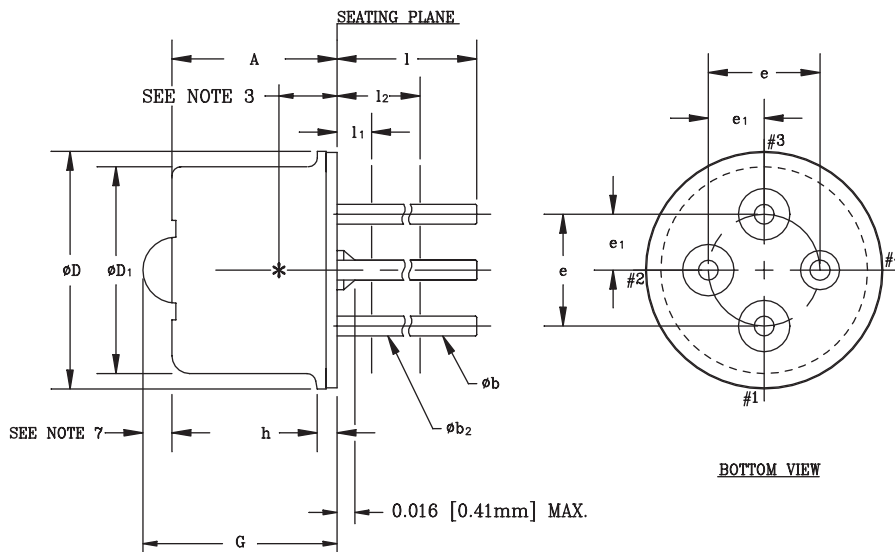

MM CONTROLLING DIMENSIONS

SYMBOL	INCHES		MILLIMETERS		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	--	0.160	--	4.00	
phi b	0.016	0.020	0.41	0.51	1
phi b2	0.012	0.019	0.30	0.48	1
phi D	0.212	0.218	5.38	5.54	
phi D1	0.181	0.187	4.60	4.75	
e	0.100	T.P.	2.54	T.P.	2
e1	0.050	T.P.	1.27	T.P.	2
h	0.014	0.022	0.36	0.56	
l	0.500	0.540	12.70	13.70	1
l1	--	0.050	--	1.27	1
l2	0.250	--	6.35	--	1
G	--	0.190	--	4.66	7

NOTES:

- (FOUR LEADS) phi b2 APPLIES BETWEEN l1 AND l2. phi b APPLIES BETWEEN l2 AND 0.5 [12.70mm] FROM SEATING PLANE; DIAMETER IS UNCONTROLLED IN l1 AND BEYOND 0.5 [12.70mm] TO END OF PIN.
- MAXIMUM DIAMETER LEADS AT A GAGING PLANE 0.054 [1.37mm]+0.001 [0.025mm] -0.000 [0.000mm] BELOW SEATING PLANE TO BE WITHIN 0.007 [0.178mm] OF THEIR TRUE POSITION RELATIVE TO MAXIMUM-WIDTH TAB AND TO THE MAXIMUM 0.212 [5.40mm] DIAMETER MEASURED WITH A SUITABLE GAGE. WHEN GAGE IS NOT USED, MEASUREMENT WILL BE MADE AT 0.250 [6.35mm] FROM SEATING PLANE.
- INTERNAL OPTICAL HEIGHT = 0.065±0.005[1.65±0.1]
- BENT LEADS SHOULD NOT EXTEND OUTSIDE DIAMETER (phi D) OF CAP OR TOUCH EACH OTHER.
- ALL DIMENSIONS ARE REFERENCE ONLY—EXCEPT A, D & h.
- DETECTOR DIODE PLACEMENT ACCURACY: phi 0.15MM[0.006] WITH RESPECT TO CENTER OF HEADER; REFERENCE ONLY
- LENS HEIGHT = 0.65±0.1 [0.026±0.004]

Figure 13: T46L Package Outline Diagram

**AMT8410**SUNSTAR微波光电 <http://www.rfoe.net/> TEL:0755-83396822 FAX:0755-83376182 E-MAIL:szss20@163.com**ORDERING INFORMATION**

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AMT8410T46L	-40 °C to +85 °C	TO-46L Ball Lens Package	-

**ANADIGICS, Inc.**141 Mount Bethel Road  
Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000

Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>E-mail: [Mktg@anadigics.com](mailto:Mktg@anadigics.com)**IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

**WARNING**

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.

~~SUNSTAR射频通信 <http://www.rfoe.net/> TEL:0755-83397033 FAX:0755-83376102 E-MAIL:szss20@163.com~~



SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382