

Hyperabrupt Varactor-Tuned Oscillators

Technical Data

VTO-9000 Series

Features

- **320 MHz to 2.3 GHz Coverage**
- **Fast Tuning**
- **Fast Setting Time**
- **+20 VDC Max Tuning Voltage**
- **10 mW Output Power**
- **±2.0 dB Output Flatness**
- **Hermetic Thin-film Construction**

Description


HP VTO-9000 Hyperabrupt Series oscillators use a silicon transistor chip as a negative resistance oscillator. The oscillation frequency is determined by a silicon hyperabrupt varactor diode acting as a voltage-variable capacitor in a thin-film microstripline resonator.

This provides extremely fast tuning speed limited primarily by the internal impedance of the user-supplied voltage driver.

This family of oscillators is similar to the standard commercial VTO-8000 Series except for the incorporation of a silicon hyperabrupt varactor tuning diode. This enables the oscillator to be tuned over the specified range in less than 20 volts rather than 40 to 50 volts in conventional oscillators.

The VTO-9000 Series VTOs are packaged in TO-8 transistor cans for simple installation in a conventional 50-ohm microstripline PC board. They are ideal for most compact

Pin Configuration TO-8V




lightweight commercial and military equipment designs. Test fixturing is also available for lab bench test applications. See the "Test Fixtures for TO-8 Packages" section for additional information and outlines.

Applications

The VTO-9000 Series oscillators may be used in the same applications as VTO-8000 Series oscillators. The VTO-9000 Series is the desired choice for superior linearity and modulation sensitivity requirements.

Schematic

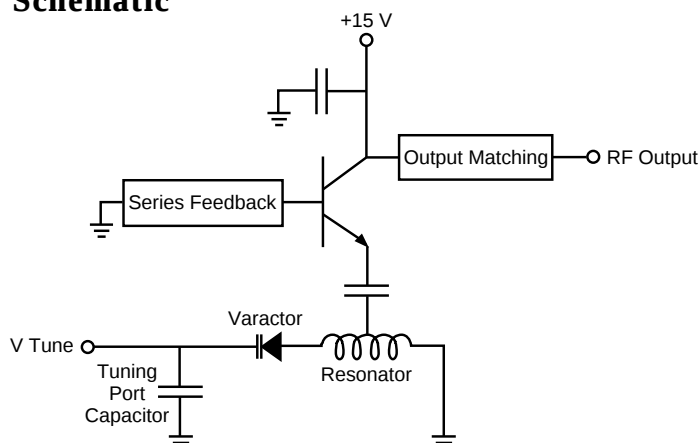

Electrical and Performance Specifications

Guaranteed Specifications @ 25°C Case Temperature (0° to +65°C Operating Temperature)

Model No.	VTO-9032	VTO-9050	VTO-9068	VTO-9090
Frequency Range, Min.	320–640 MHz	500–1000 MHz	680–1360 MHz,	900–1600 MHz
Power Output Into 50-ohm Load, Min .	10 mW/+10 dBm	10 mW/+ 10 dBm	10 mW/+10 d Bm	10 mW/+10 dBm
Power Output Variation @ 25°C, Max.	±2 dB	±2 dB	±2 dB	±2 dB
Operating Carrier Temperature Range	0° to +65°C	0° to +65°C	0° to +65°C	0° to +65°C
Frequency Drift Over Operating Temperature, Typ.	12 MHz	20 MHz	20 MHz	20 MHz
Pulling Figure (12 dB Return Loss), Typ.	20 MHz	20 MHz	25 MHz	25 MHz
Pushing Figure, +15 VDC Supply, Typ.	5 MHz/V	5 MHz/V	6 MHz/V	6 MHz/V
Harmonics, Below Carrier, Typ.	–14 dB	–10 dB	–14 dB	–14 dB
Spurious Output Below Carrier, Min.	–60 dB	–60 dB	–60 dB	–60 dB
Tuning Voltage				
Low Frequency, Min.	0 VDC	0 VDC	0 VDC	2 VDC
High Frequency, Max	20 VDC	20 VDC	20 VDC	18 VDC
Maximum Tuning Voltage	+20 VDC	+20 VDC	+20 VDC	+20 VDC
Tuning Port Capacitance, Nom.	200 pF	200 pF	190 pF	190 pF
Phase Noise, Single Sideband,				
1 Hz Bandwidth, Typ.				
50 kHz From Carrier	–95 dBc/Hz	–100 dBc/Hz	–95 dBc/Hz	–100 dBc/Hz
100 kHz From Carrier	–103 dBc/Hz	–108 dBc/Hz	–103 dBc/Hz	–108 dBc/Hz
Input Power, ±1% Regulation				
Voltage, Nom.	+15 VDC	+15 VDC	+15 VDC	+15 VDC
Current, Max.	50 mA	50 mA	50 mA	50 mA
Case Style	TO–8V	TO–8V	TO–8V	TO–8V

Electrical and Performance Specifications

Guaranteed Specifications @ 25°C Case Temperature (0° to +65°C Operating Temperature)

Model No.	VTO-9120	VTO-9130
Frequency Range, Min.	1200–2000 MHz	1300–2300 MHz
Power Output Into 50-ohm load, Min.	10 mW/+10 dBm	10 mW/+10 dBm
Power Output Variation @ 25°C, Max.	±2 dB	±1.5 dB
Operating Case Temperature Range	0° to +65°C	0° to +65°C
Frequency Drift Over Operating Temperature, Typ.	25 MHz	25 MHz
Pulling Figure (12 dB Return Loss), Typ.	25 MHz	50 MHz
Pushing Figure, +15 VDC Supply, Typ.	10 MHz/V	10 MHz/V
Harmonics, Below Carrier, Typ.	–14 dB	–15 dB
Spurious Output Below Carrier, Min.	–60 dB	–60 dB
Tuning Voltage		
Low Frequency	3±1 VDC	2 VDC Min.
High Frequency	12±2 VDC	20 VDC Max.
Maximum Tuning Voltage	+20 VDC	+ 20 VDC
Tuning Port Capacitance, Nom.	100 pF	100 pF
Phase Noise, Single Sideband,		
1 Hz, Bandwidth, Typ.		
50 kHz From Carrier	–97 dBc/Hz	–97 dBc/Hz
100 kHz From Carrier	–105 dBc/Hz	–105 dBc/Hz
Input Power, ±1% Regulation		
Voltage, Nom.	+15VDC	+15VDC
Current, Max.	50 mA	50 mA
Case Style	TO–8V	TO–8V

Typical Performance @ 25°C Case Temperature

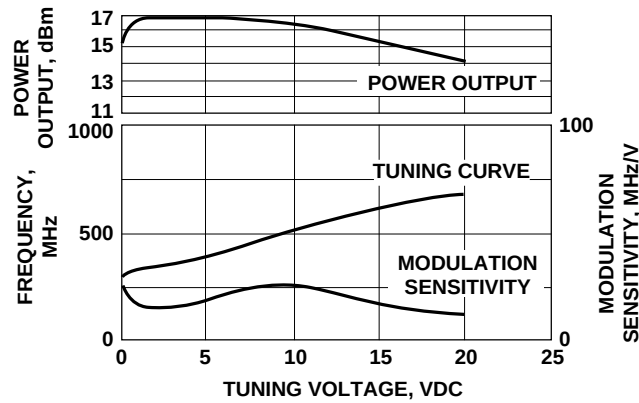


Figure 1. VTO-9032 Power Output, Frequency and Modulation Sensitivity vs. Tuning Voltage

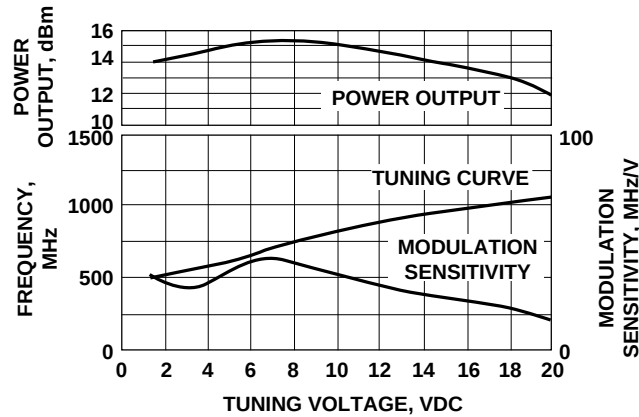


Figure 3. VTO-9050 Power Output, Frequency and Modulation Sensitivity vs. Tuning Voltage.

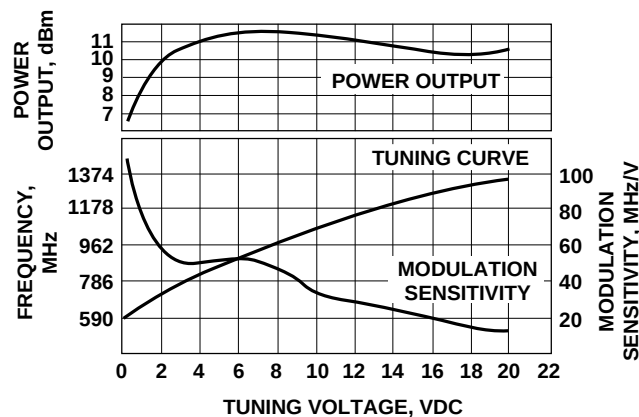


Figure 5. VTO-9068 Power Output, Frequency and Modulation Sensitivity vs. Tuning Voltage.

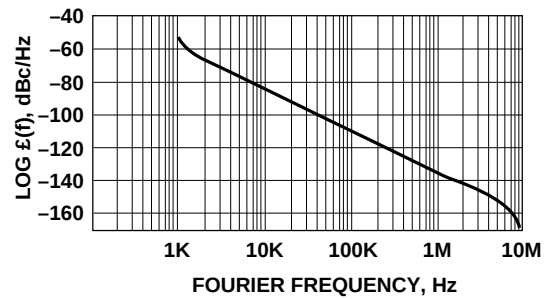


Figure 2. VTO-9032 Normalized Phase Noise @ 640 MHz S.S.B. Power Spectral Density.

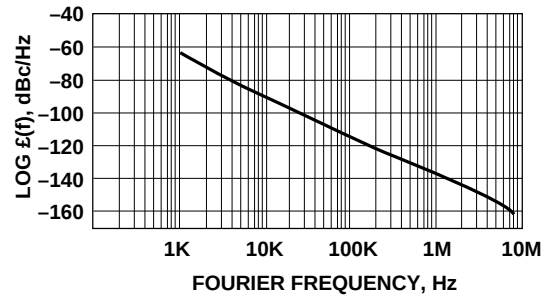


Figure 4. VTO-9050 Normalized Phase Noise @ 1000 MHz S.S.B. Power Spectral Density.

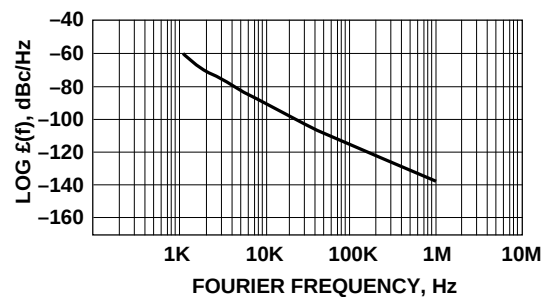


Figure 6. VTO-9068 Normalized Phase Noise @ 1360 MHz S.S.B. Power Spectral Density.

Typical Performance @ 25°C Case Temperature (continued)

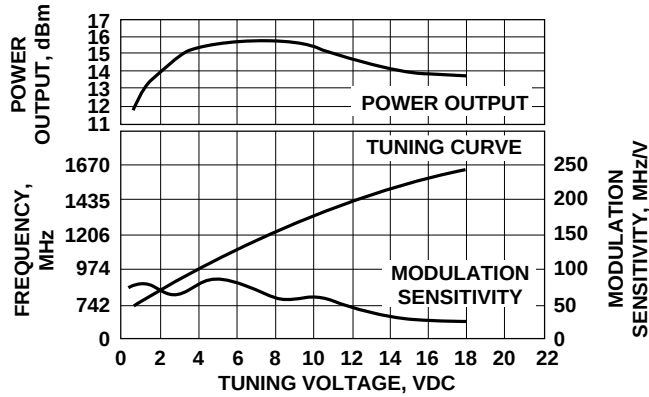


Figure 7. VTO-9090 Power Output, Frequency and Modulation Sensitivity vs. Tuning Voltage.

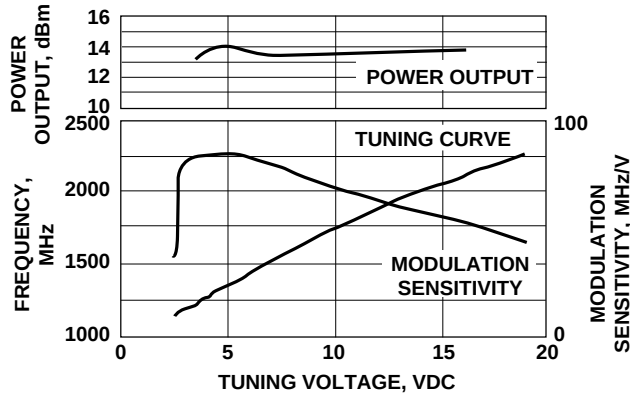


Figure 9. VTO-9120 Power Output, Frequency and Modulation Sensitivity vs. Tuning Voltage.

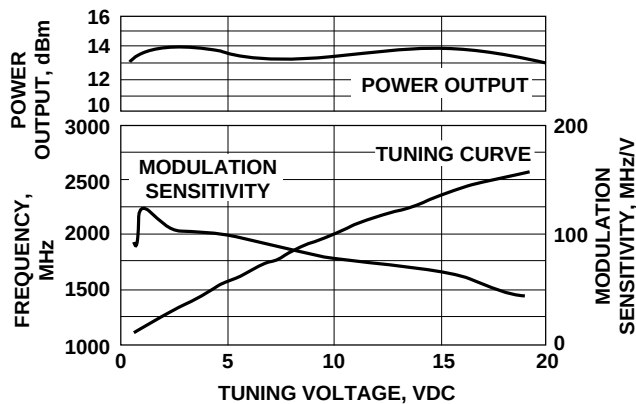


Figure 11. VTO-9130 Power Output, Frequency and Modulation Sensitivity vs. Tuning Voltage.

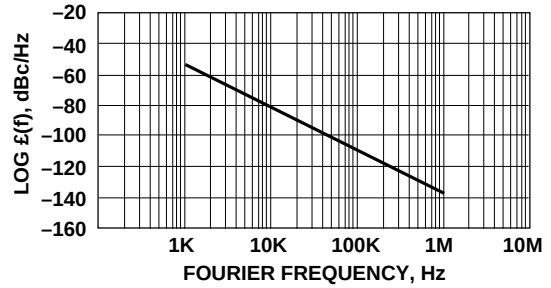


Figure 8. VTO-9090 Noise @ 1000 MHz Single Sideband Phase Noise.

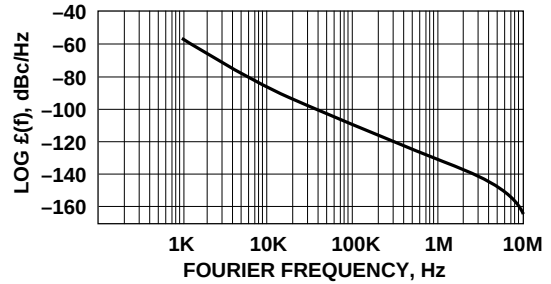


Figure 10. VTO-9120 Normalized Phase Noise @ 2000 MHz S.S.B. Power Spectral Density.



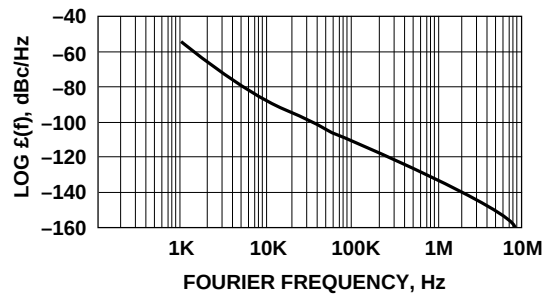


Figure 12. VTO-9130 Normalized Phase Noise @ 2300 MHz S.S.B. Power Spectral Density.

TO-8V Case Drawing

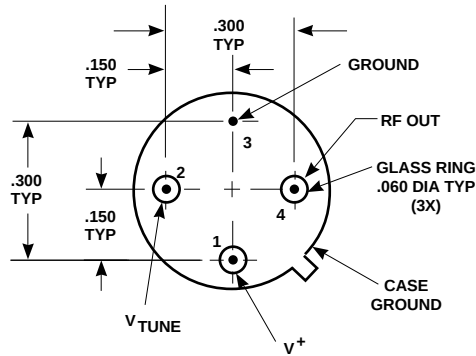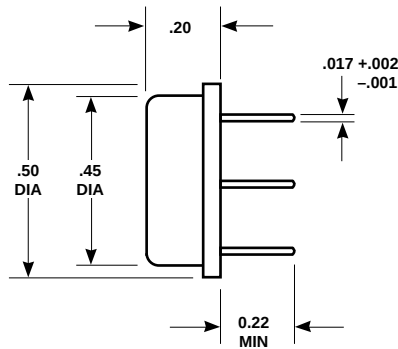

APPROXIMATE WEIGHT 1.7 GRAMS

NOTES (UNLESS OTHERWISE SPECIFIED):
 1. DIMENSIONS ARE SPECIFIED IN INCHES
 2. TOLERANCES: xx ± .02
 xxx ± .010

Test Fixtures for TO-8 Packages (TF 801/802) Oscillators (VTO)

Features

- DC to 11 GHz Frequency Range
- Connectorized Tuning Port and RF Output
- Easy to Test Package
- Repeatable Performance

Applications

- Engineering Characterization
- Incoming Inspection
- System Prototype
- Demonstration of Device Performance

Description

To facilitate testing and prototyping of products in the TO-8V package, a series of test fixtures is available. Designated the HP TF Series test fixtures, they feature rugged construction for precise, repeatable measurements.

The TF Series test fixtures come supplied with mounting hardware to ensure excellent ground contact between the oscillator package and test fixture. This assures excellent contact between package pins and test fixture connector pins for reliable testing.

The device under test is aligned according to Figure 13, and pushed fully down onto the fixture. The steel mounting ring

clamp is placed over the device under test and secured by machine screws prior to testing. Orientation of pins can be verified by comparison with part (c) of Figure 13. It is recommended that both machine screws be used to fasten the ring clamp. Screws should be tightened down snugly with a jewelers type screwdriver.

For different connector options check the table in Figure 13 to identify the correct part numbers.

It should be noted that some output power variation may be seen, from unit data, at frequencies above 8 GHz. This is due to small differences in lengths of test fixture RF output connector pins.

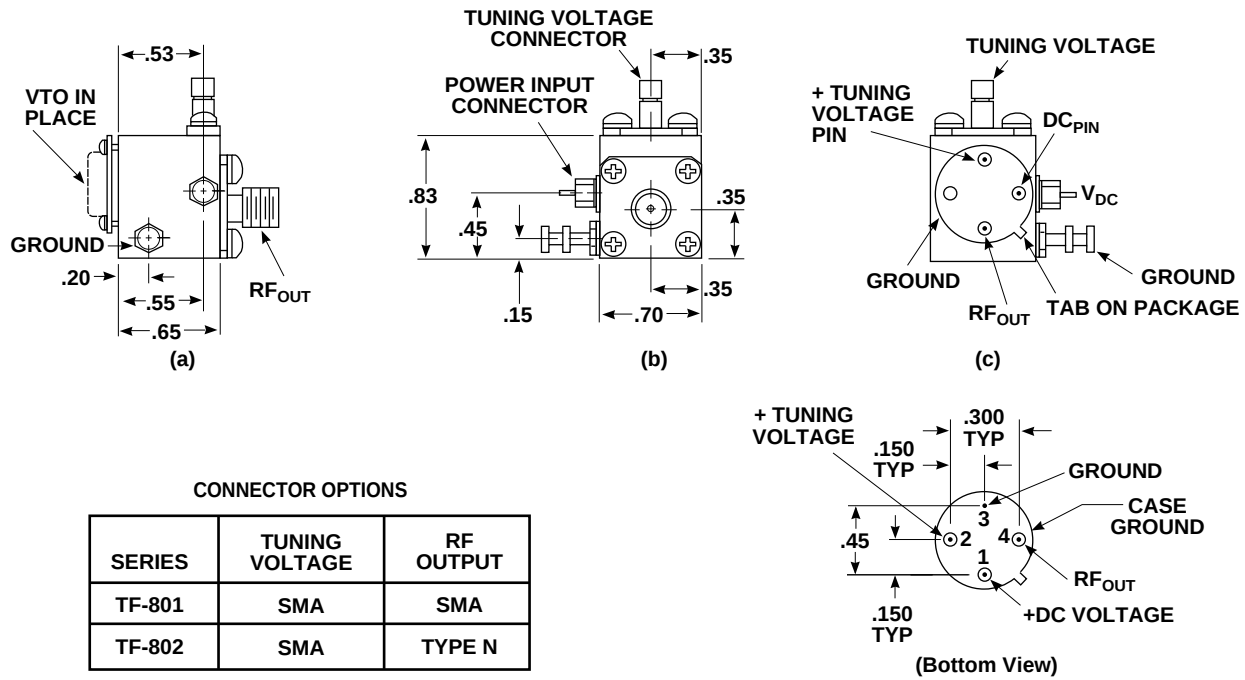


Figure 13. TO-8 Test Fixture.

www.hp.com/go/rf

For technical assistance or the location of your nearest Hewlett-Packard sales office, distributor or representative call:

Americas/Canada: 1-800-235-0312 or 408-654-8675

Far East/Australasia: Call your local HP sales office.

Japan: (81 3) 3335-8152

Europe: Call your local HP sales office.

Data subject to change.
Copyright © 1997 Hewlett-Packard Co.

Obsoletes 5964-9814E
Printed in U.S.A. 5966-2940E (12/97)

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail: szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX: 029-88789382