




Product Description

The SGL-0263 is a high performance SiGe HBT MMIC low noise amplifier featuring 1 micron emitters with F_T up to 50 GHz. This device has an internal temperature compensation circuit permitting operation directly from supply voltages as low as 2.5V. The SGL-0263 has been characterized at $V_d = 3V$ for low power and 4V for medium power applications. Only 2 DC-blocking capacitors, 2 input matching components, a bias resistor, and an optional RF choke are required for operation from 1400-2500 MHz.

The matte tin finish on Sirenza's lead-free "Z" package is applied using a post annealing process to mitigate tin whisker formation and is RoHS compliant per EU Directive 2002/95. The package body is manufactured with green molding compounds that contain no antimony trioxide or halogenated fire retardants.

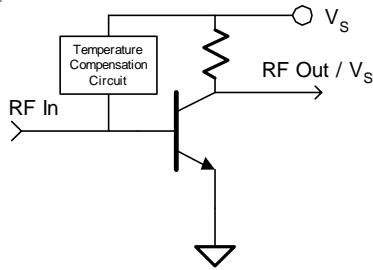

SGL-0263

SGL-0263Z RoHS Compliant & Green Package

1400 - 2500 MHz Silicon Germanium Cascadable Low Noise Amplifier



Product Features

- Available in Lead Free, RoHS Compliant green package (Z Suffix)
- High Input / Output Intercept
- Low Noise Figure: 1.3dB typ. at 1900 MHz
- Low Power Consumption
- Single Voltage Supply Operation
- Internal Temperature Compensation

Applications

- Receivers, GPS, RFID
- Cellular, Fixed Wireless, Land Mobile






Symbol	Parameter	Freq. (MHz)	Min. ($V_s=3V$)	Typ. ($V_s=3V$)	Max. ($V_s=3V$)	Typ. ($V_s=4V$)	Units
G	Small Signal Gain	1900 2100 2400	12.1	13.4 12.5 10.8	14.7	13.8 12.9 11.3	dB
P_{1dB}	Output Power at 1dB Compression	1900 2100 2400	3.5	5.5 6.8 7.9		11.4 12.3 12.8	dBm
IIP_3	Input Third Order Intercept Point Tone Spacing = 1 MHz P_{out} per tone = -13dBm	1900 2100 2400	7.5	9.5 13.5 15.5		15.1 16.8 18.4	dBm
NF	Noise Figure, $Z_s = 50$ Ohms	1900 2100 2400		1.3 1.5 2.0	1.7	1.9 2.1 2.8	dB
IRL	Input Return Loss	1900	10.0	13.3		21.9	dB
ORL	Output Return Loss	1900	10.0	12.9		17.4	dB
$ S_{12} $	Reverse Isolation	1900		20.7		21.0	dB
I_b	Device Current		9.0	12.5	15	23	mA
$R_{TH(j-l)}$	Thermal Resistance (junction to lead)			255			$^{\circ}C/W$
Test Conditions: 1400-2500 MHz Application Circuit $T_{LEAD} = 25^{\circ}C$ $Z_0 = Z_L = 50$ Ohms							

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions. Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems. Copyright 2005 Sirenza Microdevices, Inc.. All worldwide rights reserved.



SGL-0263(Z) 1400-2500 MHz SiGe Low Noise Amplifier

Typical RF Performance Over Lead Temperature at 3 V and 4 V -- 1400-2500 MHz Evaluation Board

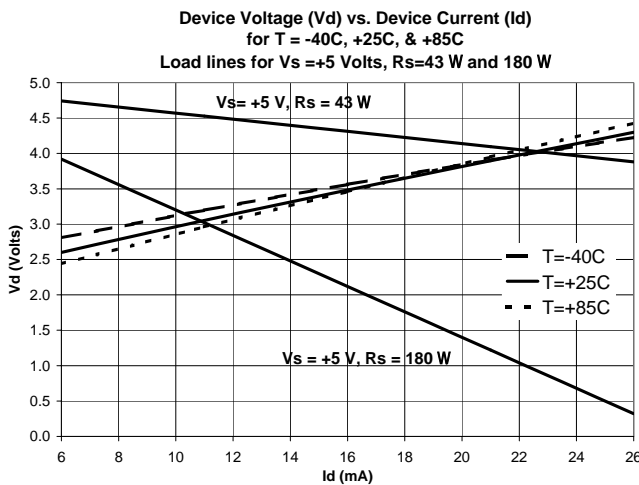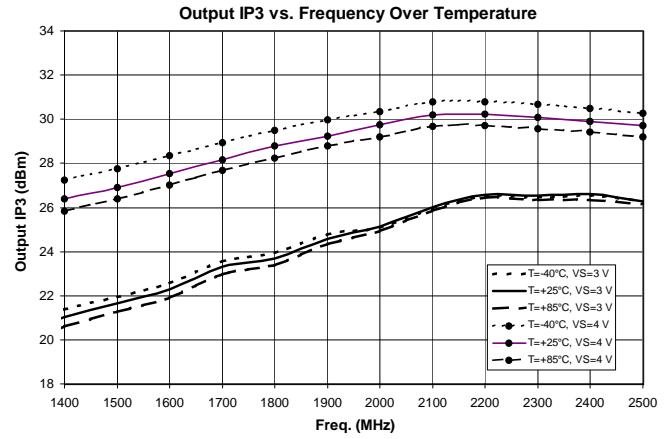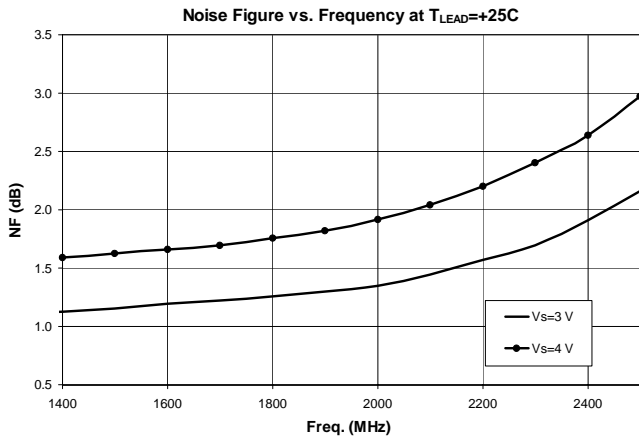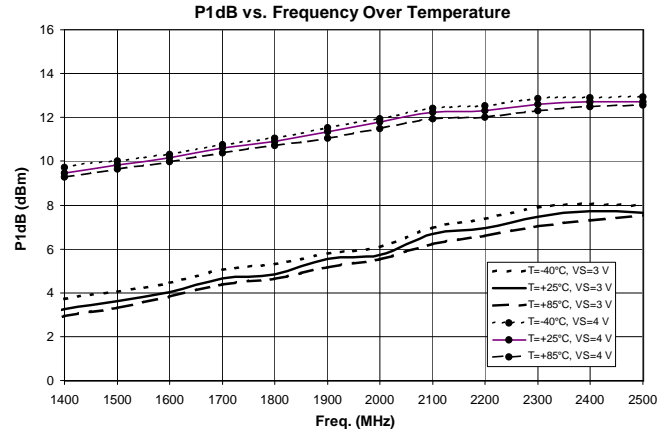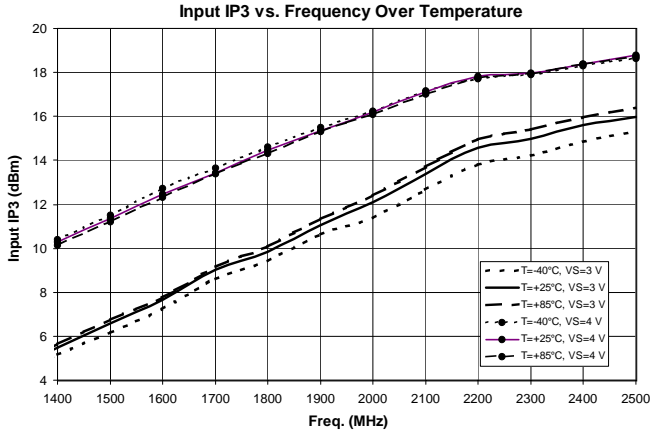

Absolute Maximum Ratings

Parameter	Absolute Limit
Max. Device Current (I _D)	45 mA
Max. Device Voltage (V _S)	5 V
Max. RF Input Power	+10 dBm
Max. Junction Temp. (T _J)	+150°C
Operating Temp. Range (T _{LEAD})	-40°C to +85°C
Max. Storage Temp.	+150°C

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.





Bias conditions should also satisfy the following expression:

$$I_D V_D < (T_J - T_{LEAD}) / R_{TH} \text{ } ^\circ\text{C/W}$$







SGL-0263(Z) 1400-2500 MHz SiGe Low Noise Amplifier

Typical RF Performance at $V_s = 3\text{ V}$ -- 1400-2500 MHz Evaluation Board -- $T_{LEAD} = +25^\circ\text{C}$

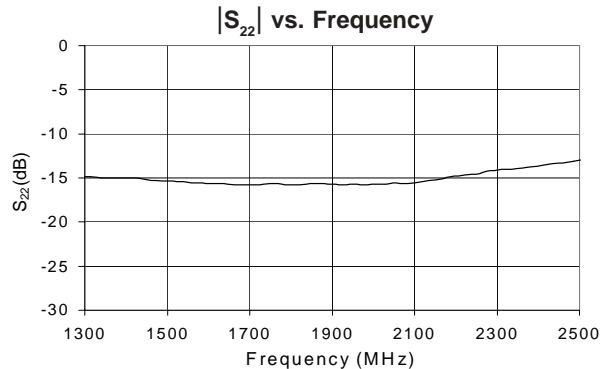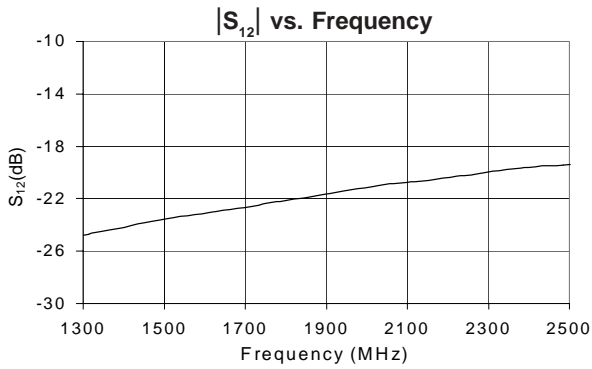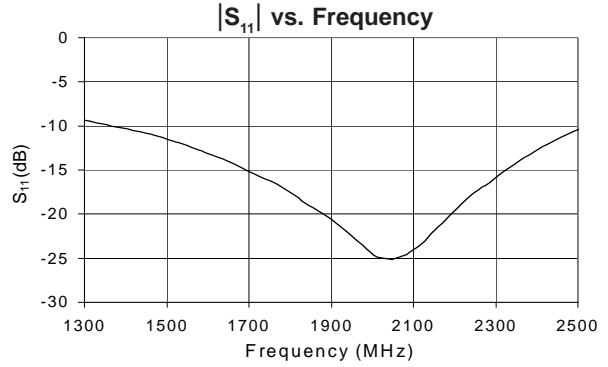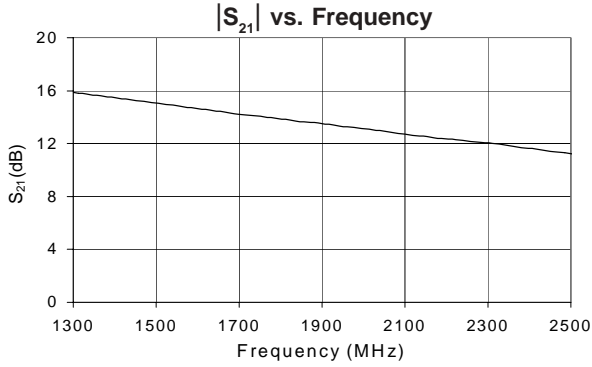

Typical RF Performance at $V_s = 4\text{ V}$ -- 1400-2500 MHz Evaluation Board -- $T_{LEAD} = +25^\circ\text{C}$

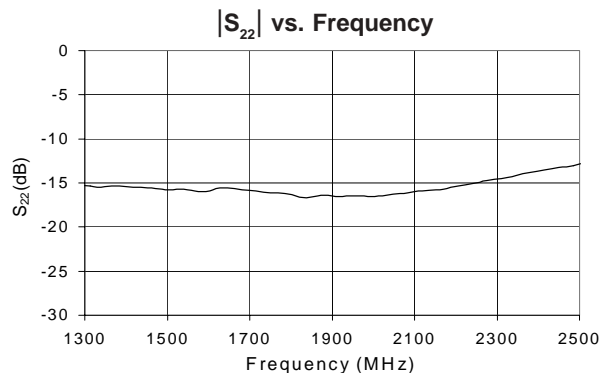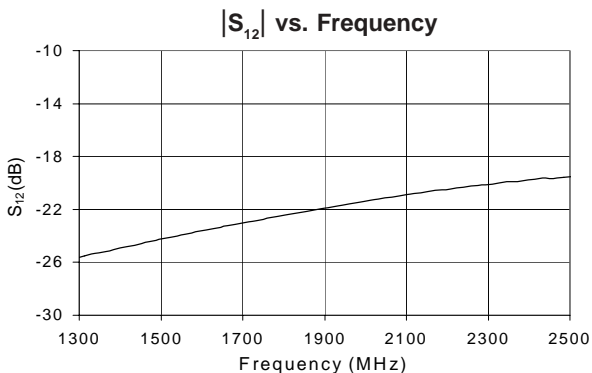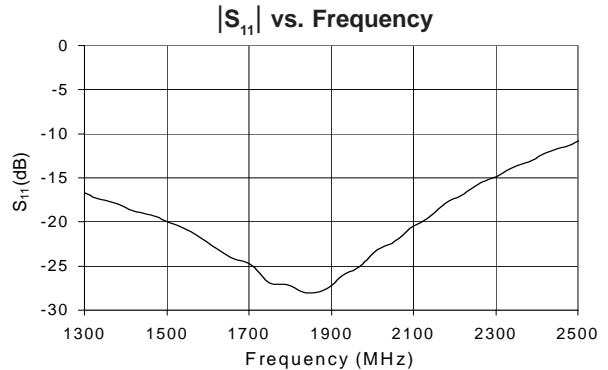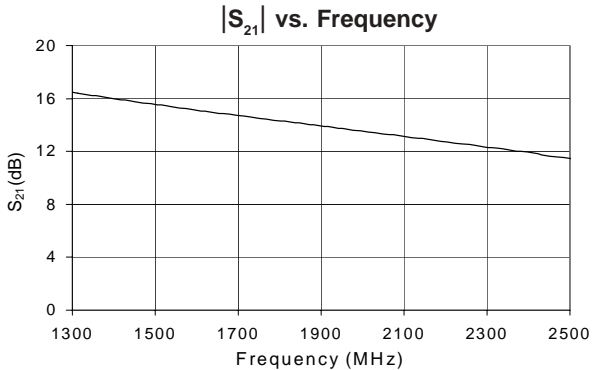


NOTE: Full S-parameter data available at www.sirenza.com




SGL-0263(Z) 1400-2500 MHz SiGe Low Noise Amplifier

1400-2500 MHz Application Circuit

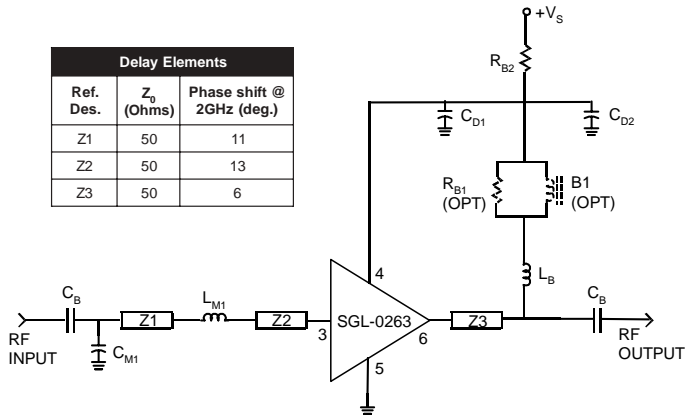

Delay Elements		
Ref. Des.	Z ₀ (Ohms)	Phase shift @ 2GHz (deg.)
Z1	50	11
Z2	50	13
Z3	50	6

1400-2500 MHz Evaluation Circuit Board

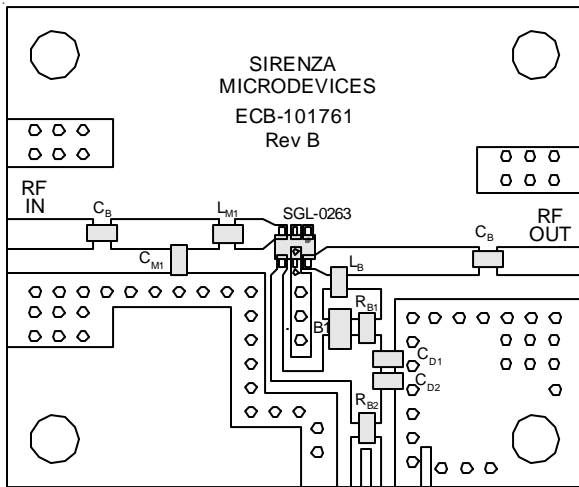

Note: Circuit board dielectric material is GETEK,ML200C

Application Circuit Element Values

Reference Designator	Value	Manufacturer & Part No.
L _B	27 nH	TOKO LL1608-FS27NJ
L _{M1}	1.2 nH	TOKO LL1608-FS1R2NJ
B1 ¹	1500 Ohms @100 MHz	FAIR-RITE 2508051527y0 Ferrite Bead
C _B , C _{D1}	0.1 uF	SAMSUNG CL10B103KBNC
C _{D2}	22 pF	ROHM MCH185AA220DJK
C _{M1}	1.0 pF	ROHM MCH185A1R0CK
R _{B1} ¹	47 Ohms	PHILLIPS 9C06031A47R0 JL HFT
R _{B2} ²	0 Ohms	PHILLIPS 9C06031A0R00 JL HFT


Notes:

- B1 and R_{B1} provide improved K-factor but are optional.
- R_{B2} may be introduced as a voltage dropping resistor for use with supply voltages greater than the desired device bias voltage.

Device Pin Out Guide

Pin #	Function	Description
1	N/C	No electrical connection. Provide an isolated (un-grounded) solder pad for mounting integrity.
3	RF IN	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
4	DC BIAS	Voltage supply connection. Bypass with suitable capacitors.
2, 5	Ground	Connection to ground. Provide via holes as close to the device ground leads as possible to reduce ground inductance and achieve optimum RF performance.
6	RF OUT/BIAS	RF output and voltage supply. DC voltage is present on this pin, therefore a DC blocking capacitor is necessary for proper operation.

Part Identification Marking & Pin Out

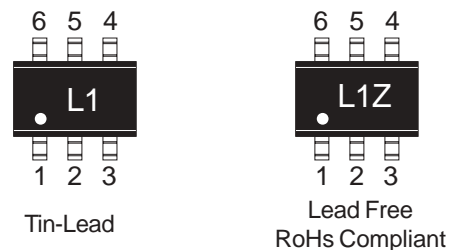

Reliability & Qualification Information

Parameter	Rating
ESD Rating - Human Body Model (HBM)	Class 1A
Moisture Sensitivity Level	MSL 1

The product qualification report may be downloaded at www.sirenza.com



Caution: ESD sensitive
Appropriate precautions in handling, packaging and testing devices must be observed.

Part Ordering Information


Part Number	Package / Lead Composition	Reel Size	Devices / Reel
SGL-0263	Tin-Lead	7"	3000
SGL-0263Z	Lead Free, RoHs Compliant	7"	3000



SGL-0263(Z) 1400-2500 MHz SiGe Low Noise Amplifier

SOT-363 PCB Pad Layout

Dimensions in inches [millimeters]

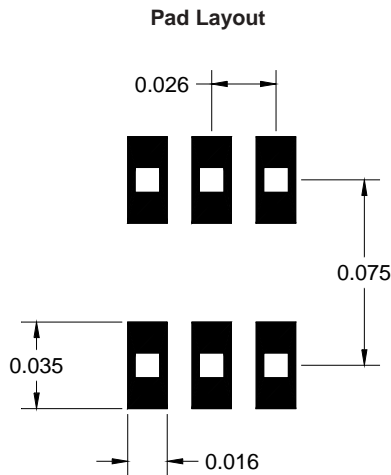


Notes:

1. Provide a ground pad area under device pins 2 & 5 with plated via holes to the PCB ground plane.
2. We recommend 1 or 2 ounce copper. Measurements for this data sheet were made on a 31 mil thick Getek with 1 ounce copper on both sides.

SOT-363 Nominal Package Dimensions

Dimensions in inches [millimeters]

A link to the SOT-363 package outline drawing with full dimensions and tolerances may be found on the product web page at www.sirenza.com.

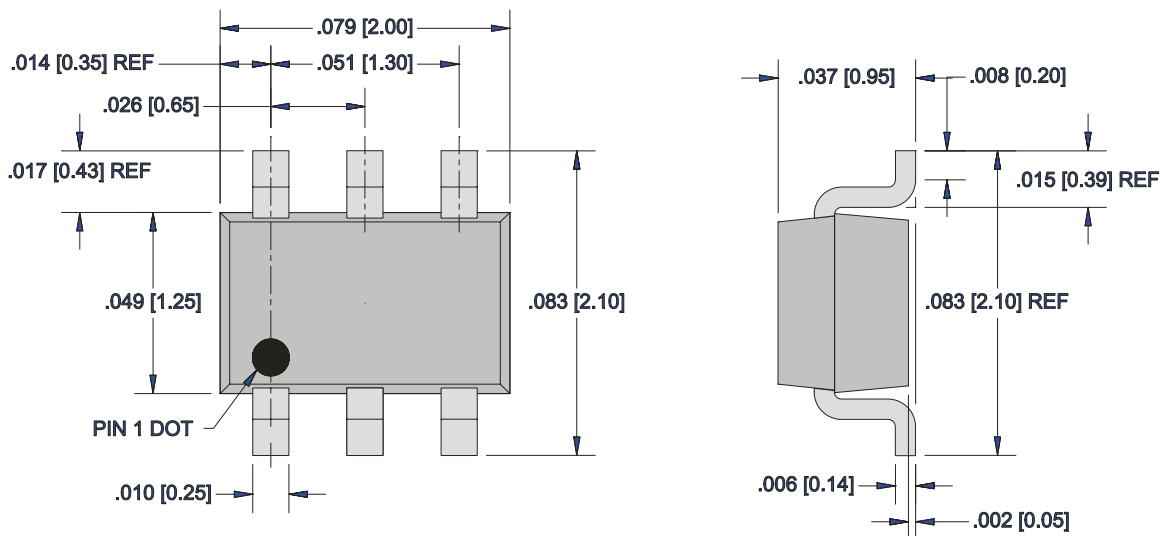

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382