


DISCRETE SEMICONDUCTORS

DATA SHEET

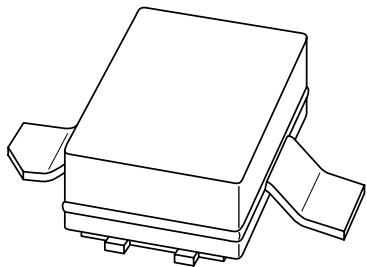

BLA1011-2 Avionics LDMOS transistor

Product specification
Supersedes data of 2002 Oct 02

2003 Nov 19

**Philips
Semiconductors**

SUNSTAR射频通信 <http://www.rfoe.net/> TEL:0755-83397033 FAX:0755-83376182 E-MAIL:szss20@163.com



PHILIPS

Avionics LDMOS transistor**BLA1011-2****FEATURES**

- High power gain
- Easy power control
- Excellent ruggedness
- Source on mounting base eliminates DC isolators, reducing common mode inductance.

APPLICATIONS


- Avionics applications in the 1030 to 1090 MHz frequency range.

DESCRIPTION

Silicon N-channel enhancement mode lateral D-MOS transistor encapsulated in a 2-lead flangeless package (SOT538A) with a ceramic cap. The common source is connected to the mounting base.

PINNING - SOT538A

PIN	DESCRIPTION
1	drain
2	gate
3	source, connected to mounting base

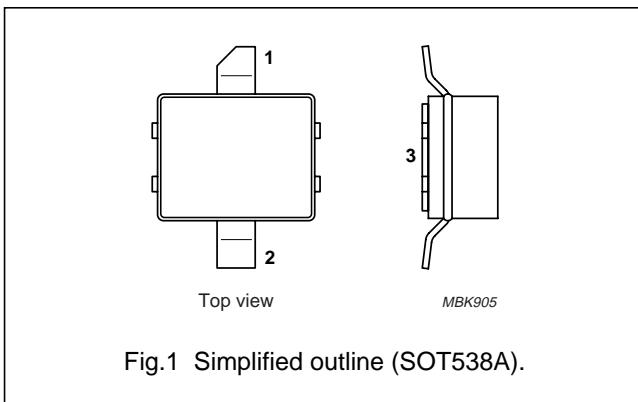**QUICK REFERENCE DATA**

RF performance at $T_h = 25^\circ\text{C}$ in a common source test circuit.

MODE OF OPERATION	f (MHz)	V _{DS} (V)	P _L (W)	G _p (dB)
Pulsed class-AB; $t_p = 50 \mu\text{s}; \delta = 2\%$	1030 to 1090	36	2	>16

ORDERING INFORMATION

TYPE NUMBER	PACKAGE			VERSION
	NAME	DESCRIPTION	VERSION	
BLA1011-2	-	ceramic surface mounted package; 2 leads		SOT538A

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{DS}	drain-source voltage		-	75	V
V _{GS}	gate-source voltage		-	± 15	V
I _D	drain current (DC)		-	2.2	A
P _{tot}	total power dissipation	$T_h \leq 25^\circ\text{C}$	-	10	W
T _{stg}	storage temperature		-65	+150	°C
T _j	junction temperature		-	200	°C

Avionics LDMOS transistor

BLA1011-2

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$Z_{th(j\text{-}mb)}$	thermal impedance from junction to mounting base	note 1	1	K/W
$R_{th(mb\text{-}h)}$	thermal resistance from mounting base to heatsink	note 2	6.5	K/W

Notes

- Thermal impedance is determined under RF operating conditions with pulsed bias and $T_h = 25^\circ\text{C}$.
- Typical value for mounting on PCB with 32 0.4 mm thermal vias with 20 μm tin plating and thermal compound between PCB and heatsink.

CHARACTERISTICS

 $T_j = 25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)DSS}$	drain-source breakdown voltage	$V_{GS} = 0$; $I_D = 0.2 \text{ mA}$	75	—	—	V
V_{GSth}	gate-source threshold voltage	$V_{DS} = 10 \text{ V}$; $I_D = 20 \text{ mA}$	2	—	5	V
I_{DSS}	drain-source leakage current	$V_{GS} = 0$; $V_{DS} = 26 \text{ V}$	—	—	0.1	mA
I_{DSX}	on-state drain current	$V_{GS} = V_{GSth} + 9 \text{ V}$; $V_{DS} = 10 \text{ V}$	2.8	—	—	A
I_{GSS}	gate leakage current	$V_{GS} = \pm 15 \text{ V}$; $V_{DS} = 0$	—	—	40	nA
g_{fs}	forward transconductance	$V_{DS} = 10 \text{ V}$; $I_D = 0.75 \text{ A}$	—	0.5	—	S
R_{DSon}	drain-source on-state resistance	$V_{GS} = 10 \text{ V}$; $I_D = 0.75 \text{ A}$	—	1.2	—	Ω
C_{is}	input capacitance	$V_{GS} = 0 \text{ V}$; $V_{DS} = 26 \text{ V}$; $f = 1 \text{ MHz}$	—	11	—	pF
C_{os}	output capacitance	$V_{GS} = 0 \text{ V}$; $V_{DS} = 26 \text{ V}$; $f = 1 \text{ MHz}$	—	9	—	pF
C_{rs}	feedback capacitance	$V_{GS} = 0 \text{ V}$; $V_{DS} = 26 \text{ V}$; $f = 1 \text{ MHz}$	—	0.5	—	pF

APPLICATION INFORMATION

RF performance in a common source class-AB circuit. $T_h = 25^\circ\text{C}$; $R_{th(mb-h)} = 6.5 \text{ K/W}$ unless otherwise specified.

MODE OF OPERATION	f (MHz)	V_{DS} (V)	I_{DQ} (mA)	P_L (W)	G_p (dB)	t_r (ns)	t_f (ns)	PULSE DROOP (dB)
Pulsed class-AB; $t_p = 50 \mu\text{s}$; $\delta = 2\%$	1030 to 1090	36	50	2	>16	<15	<15	<0.5

Ruggedness in class-AB operation


The BLA1011-2 is capable of withstanding a load mismatch corresponding to $\text{VSWR} = 5 : 1$ through all phases under the operating conditions.

Typical impedance values

FREQUENCY (MHz)	Z_s (Ω)	Z_L (Ω)
1030	$1.51 + j 11.76$	$6.9 + j 5$
1060	$1.51 + j 11.26$	$6.7 + j 5.9$
1090	$1.52 + j 10.77$	$5.1 + j 6.6$

Avionics LDMOS transistor


BLA1011-2

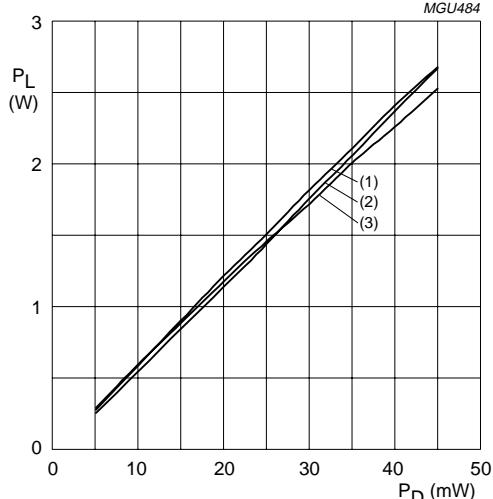

$T_h = 25^\circ\text{C}$; $V_{DS} = 36 \text{ V}$; $I_{DQ} = 50 \text{ mA}$; class-AB;
 $t_p = 50 \mu\text{s}$; $\delta = 2\%$.

- (1) $f = 1060 \text{ MHz}$.
- (2) $f = 1030 \text{ MHz}$.
- (3) $f = 1090 \text{ MHz}$.


Fig.2 Load power as a function of drive power;
typical values.

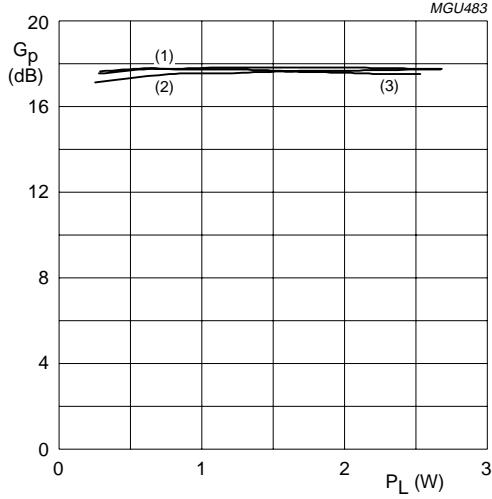

$T_h = 25^\circ\text{C}$; $V_{DS} = 36 \text{ V}$; $I_{DQ} = 50 \text{ mA}$; class-AB;
 $t_p = 50 \mu\text{s}$; $\delta = 2\%$.

- (1) $f = 1060 \text{ MHz}$.
- (2) $f = 1030 \text{ MHz}$.
- (3) $f = 1090 \text{ MHz}$.


Fig.3 Power gain as a function of load power;
typical values.

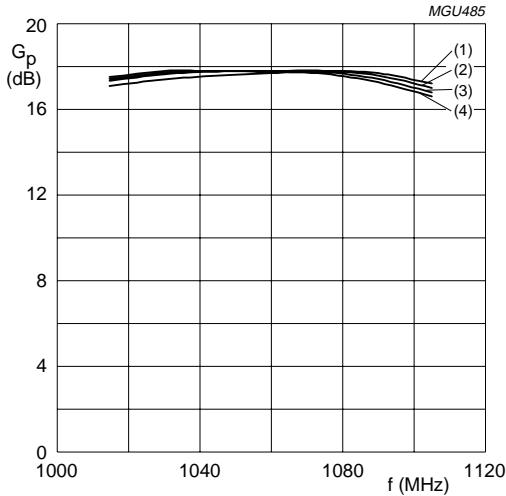

$T_h = 25^\circ\text{C}$; $V_{DS} = 36 \text{ V}$; $I_{DQ} = 50 \text{ mA}$; class-AB;
 $t_p = 50 \mu\text{s}$; $\delta = 2\%$.

- (1) $P_L = 1 \text{ W}$.
- (2) $P_L = 2 \text{ W}$.
- (3) $P_L = 3 \text{ W}$.
- (4) $P_L = 4 \text{ W}$.

Fig.4 Power gain as a function of frequency;
typical values.

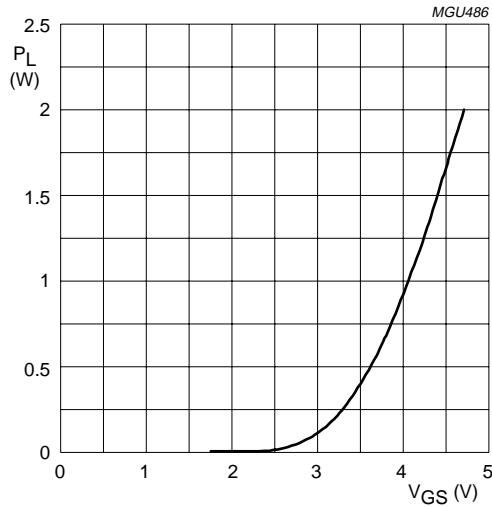


$T_h = 25^\circ\text{C}$; $V_{DS} = 36 \text{ V}$; $I_{DQ} = 50 \text{ mA}$; class-AB;
 $f = 1090 \text{ MHz}$; $t_p = 50 \mu\text{s}$; $\delta = 2\%$.

Fig.5 Load power as a function of gate-source
voltage; typical values.

Avionics LDMOS transistor

BLA1011-2

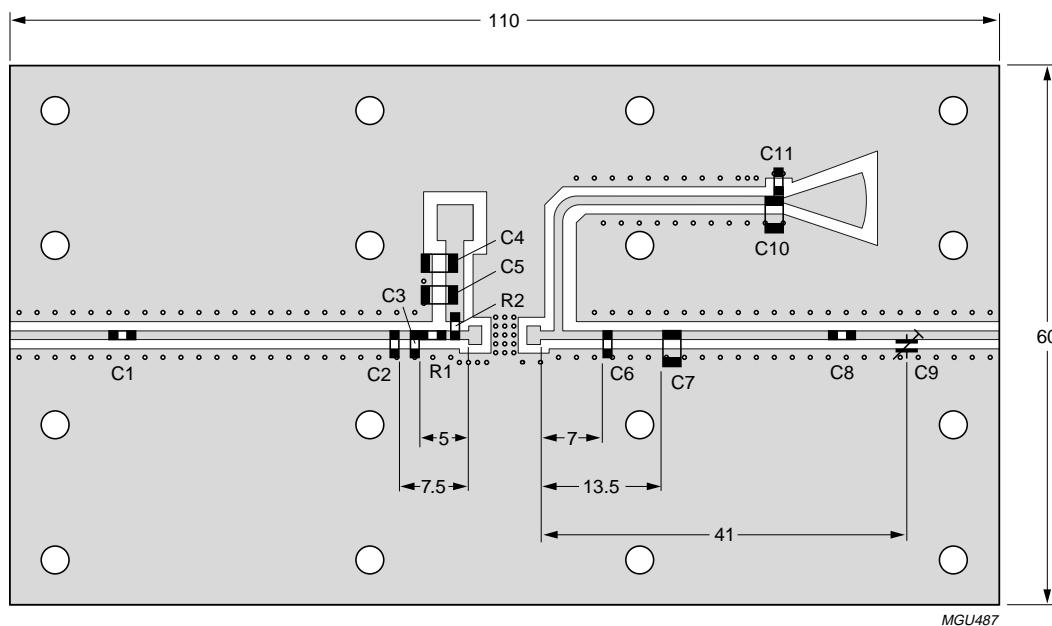

Dimensions in mm.

The components are situated on one side of the Rogers 6006 printed-circuit board (thickness = 0.64 mm; $\epsilon_r = 6.2$), the other side is unetched and serves as a ground plane. Earth connections from the component side to the ground plane are made by through-metallization.

Fig.6 Printed-circuit board for class-AB test circuit.

List of components for class-AB test circuit (see Fig.6)

COMPONENT	DESCRIPTION	VALUE
C1, C8	multilayer ceramic chip capacitor; note 1	56 pF
C2	multilayer ceramic chip capacitor; note 1	7.5 pF
C3	multilayer ceramic chip capacitor; note 1	1.8 pF
C4, C10	multilayer ceramic chip capacitor; note 2	20 nF
C5	multilayer ceramic chip capacitor; note 3	33 pF
C6	multilayer ceramic chip capacitor; note 1	5.6 pF
C7	multilayer ceramic chip capacitor; note 3	6.2 pF
C9	tekelec trimmer; type 37283	0.4 to 2.5 pF
C11	multilayer ceramic chip capacitor; note 1	33 pF
R1	SMD resistor	2.2 Ω (2 in parallel)
R2	SMD resistor	22 Ω

Notes

1. American Technical Ceramics type 100A or capacitor of same quality.
2. American Technical Ceramics type 200B or capacitor of same quality.
3. American Technical Ceramics type 100B or capacitor of same quality.


Avionics LDMOS transistor

BLA1011-2

PACKAGE OUTLINE

Ceramic surface mounted package; 2 leads

SOT538A

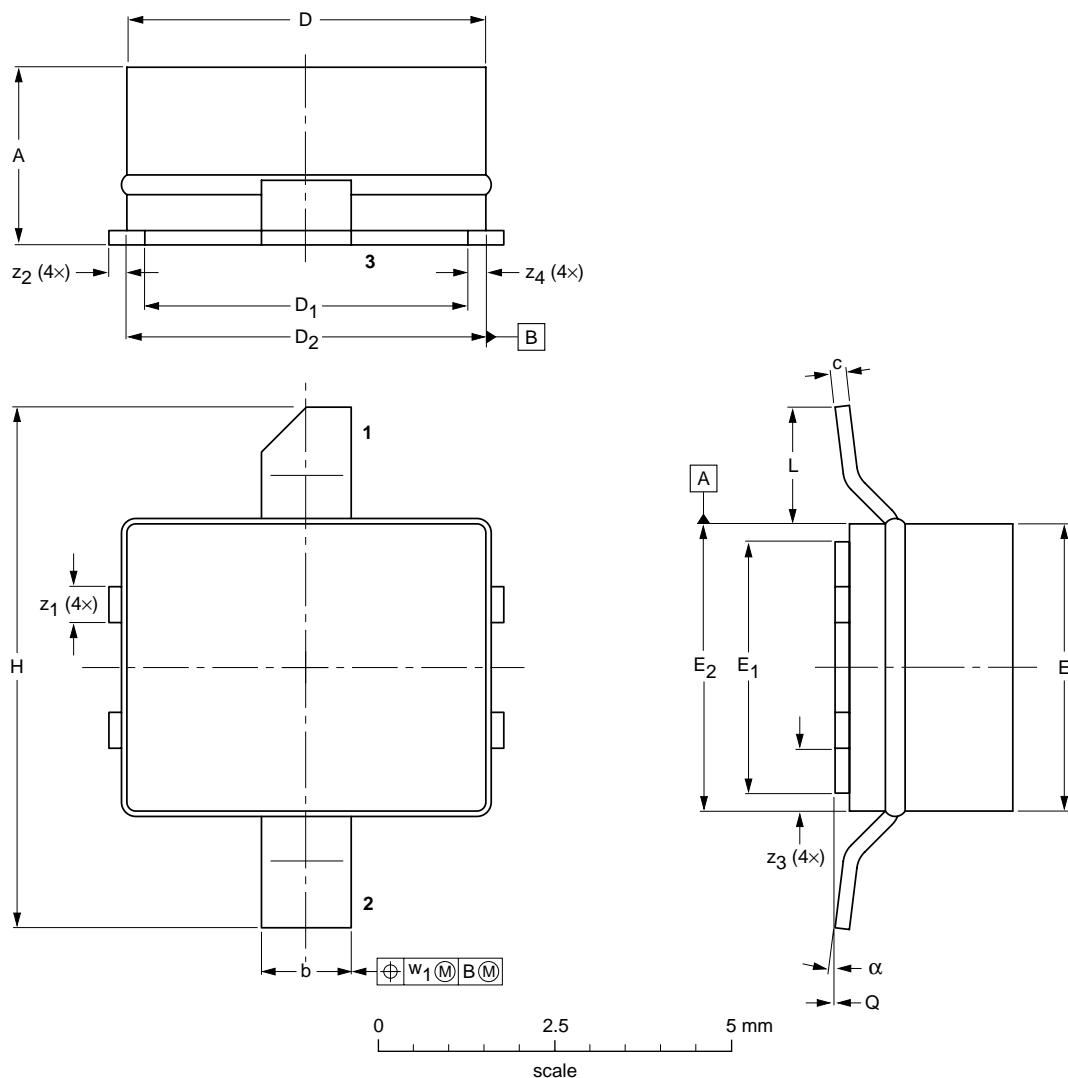

DIMENSIONS (millimetre dimensions are derived from the original inch dimensions)

UNIT	A	b	c	D	D ₁	D ₂	E	E ₁	E ₂	H	L	Q	w ₁	z ₁	z ₂	z ₃	z ₄	alpha
mm	2.95 2.29	1.35 1.19	0.23 0.18	5.16 5.00	4.65 4.50	5.16 5.00	4.14 3.99	3.63 3.48	4.14 3.99	7.49 7.24	2.03 1.27	0.10 0.00	0.25	0.58 0.43	0.25 0.18	0.97 0.81	0.51 0.00	7° 0°
inches	0.116 0.090	0.053 0.047	0.009 0.007	0.203 0.197	0.183 0.177	0.203 0.197	0.163 0.157	0.143 0.137	0.163 0.157	0.295 0.285	0.080 0.050	0.004 0.000	0.010	0.023 0.017	0.010 0.007	0.038 0.032	0.020 0.000	7° 0°

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT538A						-00-03-03-02-08-20

Avionics LDMOS transistor

BLA1011-2

DATA SHEET STATUS

LEVEL	DATA SHEET STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾⁽³⁾	DEFINITION
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
II	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
III	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

Notes

1. Please consult the most recently issued data sheet before initiating or completing a design.
2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.
3. For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

DEFINITIONS

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Avionics LDMOS transistor

BLA1011-2

CAUTION

This product is supplied in anti-static packing to prevent damage caused by electrostatic discharge during transport and handling. For further information, refer to Philips specs.: SNW-EQ-608, SNW-FQ-302A and SNW-FQ-302B.

Philips Semiconductors – a worldwide company

Contact information

For additional information please visit <http://www.semiconductors.philips.com>. Fax: +31 40 27 24825
For sales offices addresses send e-mail to: sales.addresses@www.semiconductors.philips.com.

© Koninklijke Philips Electronics N.V. 2003

SCA75

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

R77/05/pp9

Date of release: 2003 Nov 19

Document order number: 9397 750 12245

Let's make things better.

Philips
Semiconductors

SUNSTAR射频通信 <http://www.rfoe.net/> TEL:0755-83397033 FAX:0755-83376182 E-MAIL:szss20@163.com



PHILIPS

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：<HTTP://www.rfoe.net/>

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN：SUNS8888@hotmail.com

邮编：518033 E-mail：szss20@163.com QQ：195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382