

SPECIFICATION SHEET FOR FORMALDEHYDE-SENSOR TYPE CH2O/M-10-2E

PERFORMANCE CHARACTERISTICS


Nominal Range	0 – 10 ppm
Maximum Overload	30 ppm
Expected Operation Life	2 years in air
Output Signal	2200 ± 800 nA/ppm
Resolution	0.02 ppm
Temperature Range	- 20 °C to + 50 °C
Pressure Range	Atmospheric ± 10 %
Pressure Coefficient	No data
t ₉₀ Response Time	N.D.
Relative Humidity Range	15 % to 90 % R.H. non-condensing
Typical Baseline Range (pure air, 20°C)	-0.2 ppm to +0.2 ppm
Maximum Zero Shift (+20°C to +40 °C)	N.D.
Expected Long Term Output Drift	N.D.
Recommended Load Resistor	33 Ohm
Bias Voltage	Not required
Repeatability	< 3 % of signal
Output Linearity	Linear

PHYSICAL CHARACTERISTICS


Weight	~ 5.4 g
Position Sensitivity	None
Storage Life	Six months in container
Recommended Storage Temperature	5 °C – 20 °C
Warranty Period	12 months from date of dispatch

Miniature-Size Outline Dimensions

BOTTOM VIEW



SIDE VIEW

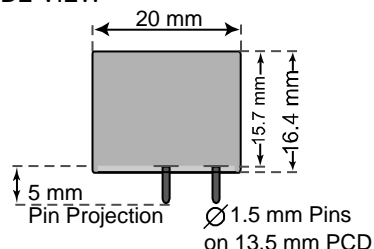

CROSS-SENSITIVITY DATA

Interfering Gas	Cross sensitivity (%)
H ₂	1%-3%
CO	10%-18%
Interference from other reducing gases such as alcohols	

Performance data conditions:
20 °C, 50% RH and 1013 mbar

APPLICATIONS

For Portable Gas Detectors

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within it. The data is given for guidance only. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

REV.: 11/2008

Page 1 of 1

Phone: +41 43 311 72 00
Fax : +41 43 311 72 01
Email: info@membrapor.ch
www.membrapor.ch

MEMBRAPOR AG
Birkenweg 2
CH-8304 Wallisellen
Switzerland

SUNSTAR自动化 <http://www.sensor-ic.com/> TEL: 0755-83376489 FAX:0755-83376182 E-MAIL: szss20@163.com