

DC-EC Accusens™ Series (General Purpose LVDT)



The DC-EC AccuSens Series

incorporates a unique monolithic chip combined with a computer designed AC LVDT to achieve premium performance.

The ratiometric design of the monolithic circuitry compensates for power supply deviations for continuously stable operation. Unaffected by input variations, the transducer provides highly accurate, repeatable measurement.

Innovative manufacturing techniques further enhance the AccuSens operation and cost efficiency. Micro-miniature components used in the construction of each unit are selected for maximum stability.

Vacuum encapsulation of all elements produces an assembly tolerant to shock, vibration and other forms of physical abuse. Double magnetic shielding protects against stray electrical fields.



FEATURES

- Linearity 0.25% of FS or better
- CE Certified
- Integrated Signal Conditioning
- Rugged Stainless Steel Construction
- Calibration Certificates Supplied with All Models


APPLICATIONS

- General

OPTIONS


- Metric Thread Core
- Captive Core Option for Convenient Installation
- Guided Core
- Small Diameter, Low Mass Core

wiring

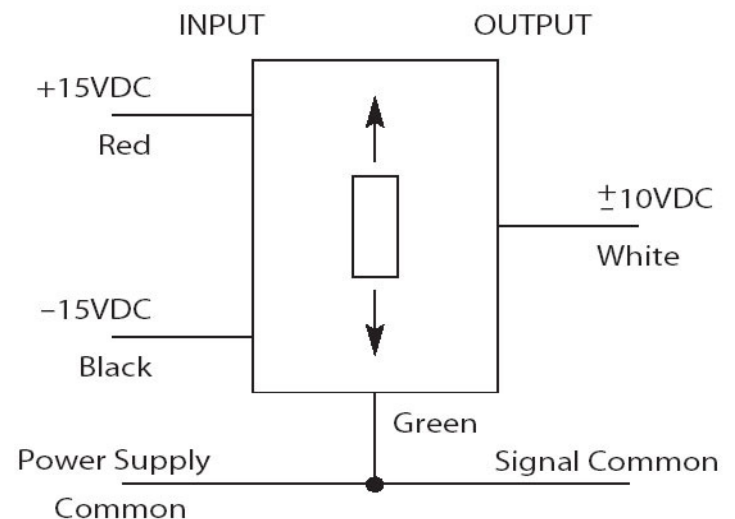


DC-EC Accusens™ Series (General Purpose LVDT)

dimensions

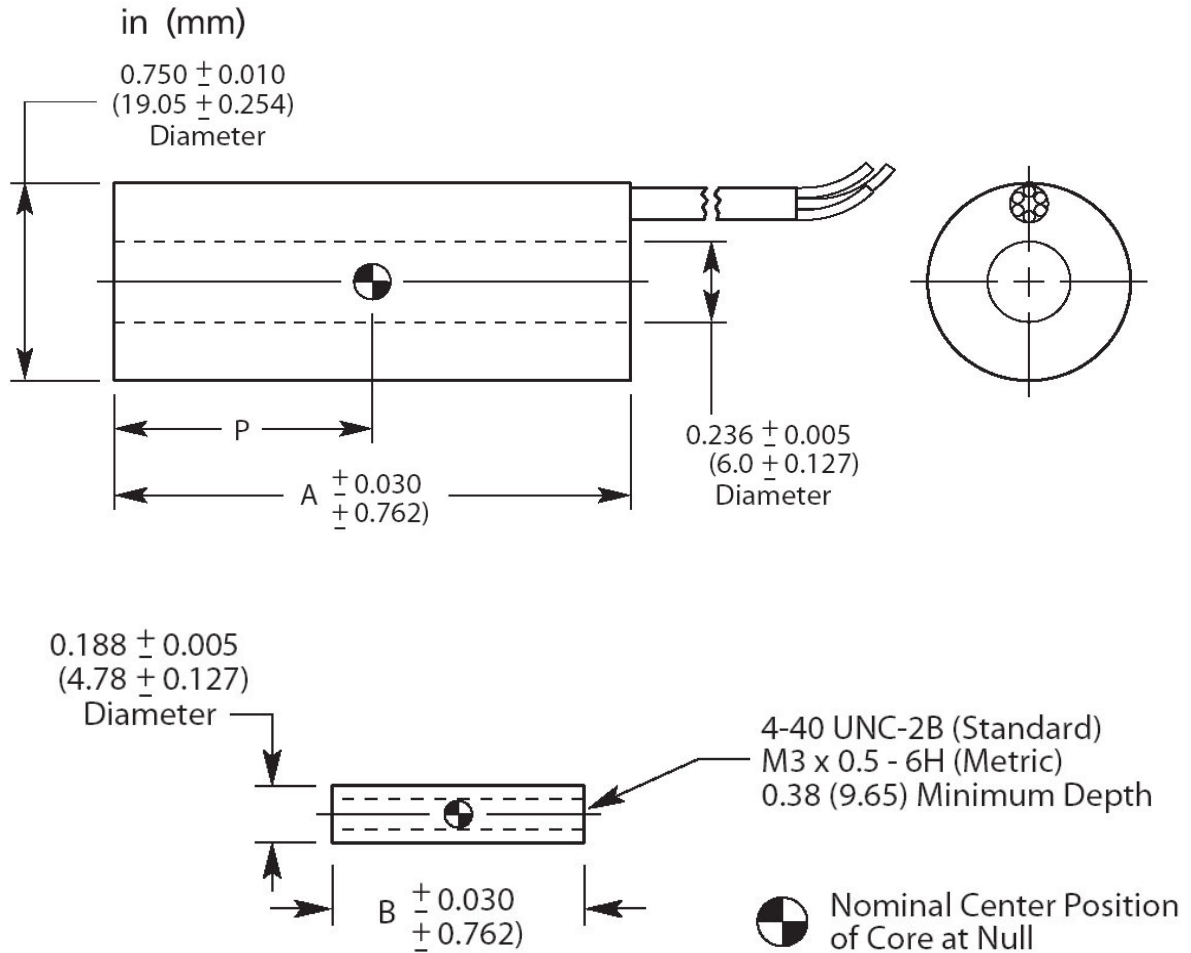

block diagram

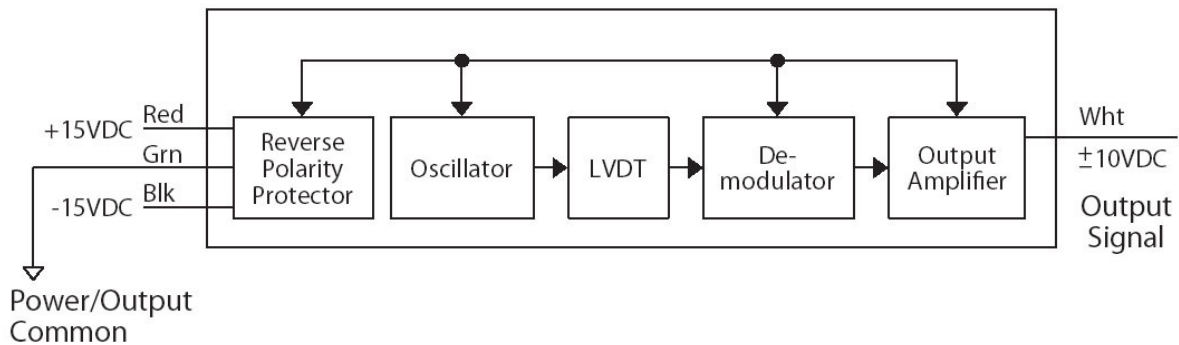

DC-EC Accusens™ Series (General Purpose LVDT)

Specifications

Input Voltage	±15 VDC (nominal), ±25mA
Operating Temperature Range	32°F to 160°F (0°C to 70°C)
Survial Temperature Range	-65°F to 200°F (-55°C to 95°C)
Null Voltage	0 VDC
Ripple	Less than 25mV rms
Linearity	0.25% full range
Stability	0.125% full scale
Temperature-Coefficient of Scale Factor	0.04%/°F (0.08%/°C)
Shock Survival	250g for 11 milliseconds
Vibration Tolerance	10g up to 2khz
Coil Form Material	High density, glass-filled polymer
Housing Material	AISI 400 series stainless steel
Cable	4 conductor, 28 AWG, stranded copper with braided shield and polyurethane jacket, 1 meter
EMC	CE certified (The DC-EC series, when correctly installed, comply with the EMC Directive 89/336/EEC generic standards for residential commercial, light industrial and industrial environments.)
Output Impedance	Less than 1 ohm

Performance and Electrical Specifications

DC-EC Series Model Number	Nominal Linear Range		Scale Factor		Response (-3 dB)
	Inches	mm	V/inch	V/mm	Hz
050 DC-EC	±0.050	±1.25	200.0	8.00	500
125 DC-EC	±0.125	±3.0	80.0	3.20	500
250 DC-EC	±0.250	±6.0	40.0	1.60	500
500 DC-EC	±0.500	±12.5	20.0	0.80	200
1000 DC-EC	±1.000	±25	10.0	0.40	200
2000 DC-EC	±2.000	±50	5.0	0.20	200
3000 DC-EC	±3.000	±75	3.3	0.13	200
5000 DC-EC	±5.000	±125	2.0	0.08	200
10000 DC-EC	±10.00	±250	1.0	0.04	200

All calibration is performed at room ambient temperature

Mechanical Specifications


DC-EC Series Model Number	Weight				Dimensions					
	Body		Core		A (Body)		B (Core)		P	
	Oz	gm	Oz	gm	In	mm	In	mm	In	mm
050 DC-EC	2.19	62	0.07	2	2.10	53.5	0.75	19.1	0.50	12.7
125 DC-EC	2.44	69	0.11	3	2.93	74.5	1.25	31.8	0.93	23.6
250 DC-EC	2.58	73	0.18	5	3.80	96.5	2.00	50.8	1.35	34.3
500 DC-EC	2.93	82	0.28	8	5.49	139.5	3.00	76.0	2.20	55.9
1000 DC-EC	4.24	120	0.35	10	7.75	196.9	3.80	96.5	3.18	80.8
2000 DC-EC	5.47	155	0.46	13	11.12	282.5	5.30	135.0	44.88	134.6
3000 DC-EC	9.39	266	0.49	14	16.32	414.5	6.20	157.5	7.55	191.8
5000 DC-EC	11.47	325	0.60	17	20.15	511.8	6.20	157.5	9.53	242.0
10000 DC-EC	15.71	445	0.85	24	35.38	898.5	12.00	305.0	16.58	421.1

DC-EC Accusens™ Series (General Purpose LVDT)

new captive core option!



The DC-EC features a captive core design that greatly simplifies installation. The design utilizes a core rod and bearing assembly that is captured and guided within the LVDT providing low friction travel throughout the stroke length. The assembly incorporates two Delrin bearings on the core rod traveling through the stainless steel boreliner. A bronze bearing on the front end utilizes a self-aligning feature to accommodate lateral LVDT movement during operation, the core rod and bearing assembly is field replaceable.

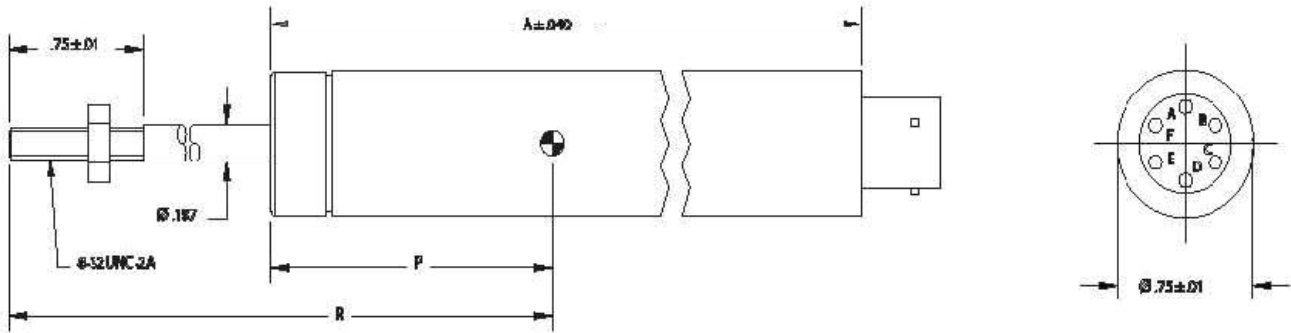

DC-EC Series Model Number	A (Body)		Dimensions P		R	
	In	mm	In	mm	In	mm
050 DC-EC	2.48	63.0	0.84	21.3	3.78	98.0
125 DC-EC	3.31	84.1	1.27	32.3	4.36	110.7
250 DC-EC	4.18	84.1	1.69	42.9	4.85	123.2
500 DC-EC	5.87	149.1	2.54	64.5	6.04	153.4
1000 DC-EC	8.13	206.5	3.52	89.4	7.90	200.7
2000 DC-EC	11.50	292.1	5.22	143.3	10.52	267.2
3000 DC-EC	16.70	424.2	7.89	200.4	15.27	387.9

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering information

Specify the DC-EC Model followed by the desired option number(s) added together.

Ordering Example:

Model Number 050DC-EC-200 is a DC-EC Series LVDT with a ±0.050" range (050 DC-EC), with the captive core option (200).

HR Model

050 DC-EC
125 DC-EC
250 DC-EC
500 DC-EC
1000 DC-EC
2000 DC-EC
3000 DC-EC
5000 DC-EC
10000 DC-EC

options

Number	Description
006	Metric threaded core
010	Guided core
020	Small diameter low mass core ¹
200	Captive Core ²

¹Consult factory for mass, dimensions and thread size.

²Available on 050 DC-EC through 3000 DC-EC models only.