


Model 3052 Accelerometer



Piezoresistive MEMS
DC Response
Circuit Board Mountable
Integral Temp Compensation

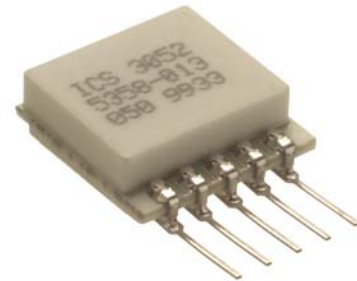

The Model 3052 is a silicon MEMS accelerometer with integral temperature compensation. The accelerometer is packaged on a ceramic substrate with an epoxy sealed ceramic cover and is designed for adhesive mounting. The accelerometer is offered in ranges from $\pm 2g$ to $\pm 200g$ range and provides a flat frequency response to minimum 2000Hz. The silicon MEMS sensor is gas damped and incorporates over-range stops for high-g shock protection.


For a similar accelerometer designed for bolt mounting, see the model 3058.

FEATURES

- Adhesive Mounted
- $\pm 0.5\%$ Non-Linearity
- $\pm 1.0\%$ Temperature Performance (Typical)
- DC Response, Gas Damping
- Built-in Overrange Stops
- Low Power Consumption
- $\pm 2mV$ Zero Output
- $\pm 2g$ to $\pm 200g$ ranges

APPLICATIONS

- Vibration & Shock Monitoring
- Motion Control
- Impact & Shock Testing
- Transportation Measurements
- Embedded Applications
- Machinery

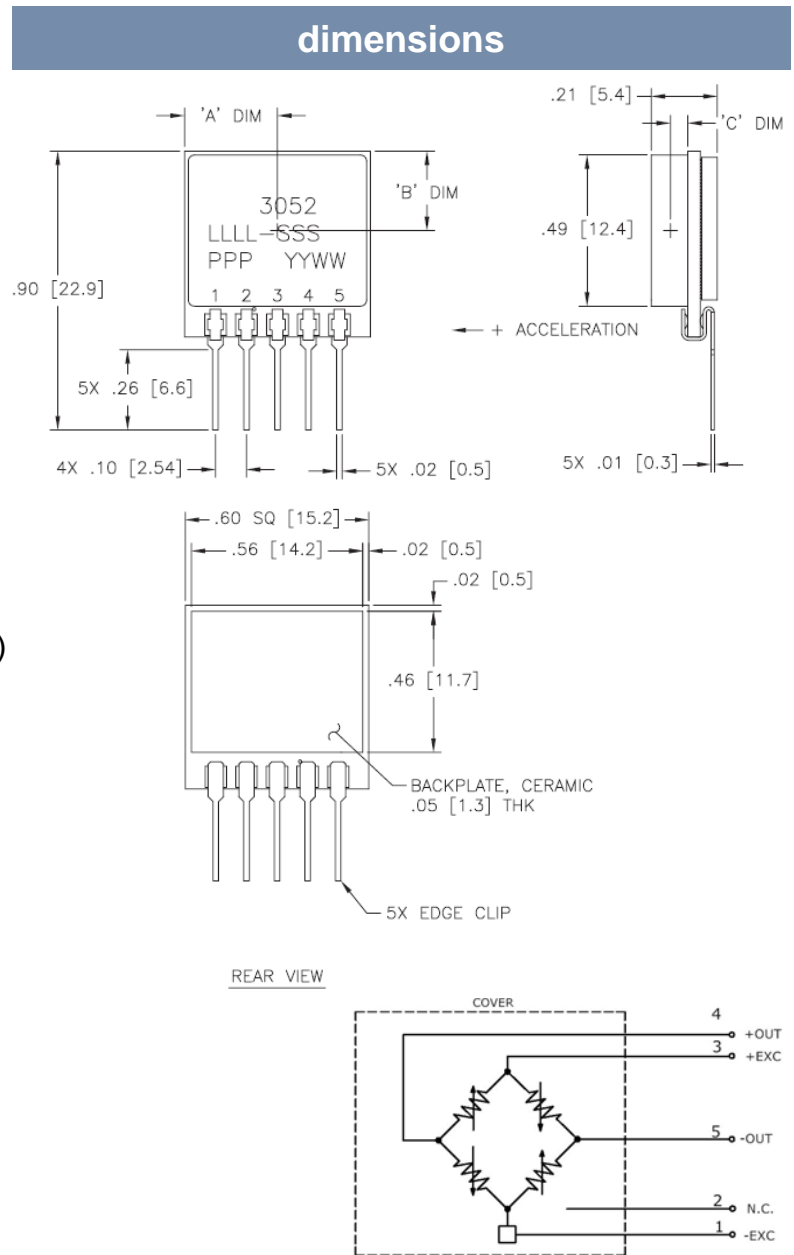

Model 3052 Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 5Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters

DYNAMIC

	±2	±5	±10	±20	±50	±100	±200	Notes
Range (g)	±2	±5	±10	±20	±50	±100	±200	
Sensitivity (mV/g) ¹	5.0-9.0	2.4-3.6	1.2-1.8	0.6-0.9	0.24-0.36	0.12-0.18	0.06-0.09	@5Vdc Excitation
Frequency Response (Hz)	0-150	0-250	0-400	0-600	0-1000	0-1500	0-2000	±5%
Natural Frequency (Hz)	700	800	1000	1500	4000	6000	8000	
Non-Linearity (%FSO)	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	0.6	
Shock Limit (g)	10000	10000	10000	10000	10000	10000	10000	

ELECTRICAL

Zero Acceleration Output (mV)	±2	±2	±2	±2	±2	±2	±2	Differential
Excitation Voltage (Vdc)	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10	
Output Resistance (Ω)	1900-6500	1900-6500	1900-6500	1900-6500	1900-6500	1900-6500	1900-6500	
Insulation Resistance (MΩ)	>100	>100	>100	>100	>100	>100	>100	@50Vdc
Residual Noise (μV RMS)	10	10	10	10	10	10	10	Maximum
Ground Isolation	Isolated from Mounting Surface							

ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	±0.060	±0.060	±0.060	±0.060	±0.060	±0.060	±0.060
Thermal Sensitivity Shift (%/°C)	±0.060	±0.060	±0.060	±0.060	±0.060	±0.060	±0.060
Operating Temperature (°C)	-40 to +125						
Compensated Temperature (°C)	0 to +50						
Storage Temperature (°C)	-40 to +125						

PHYSICAL

Case Material	Ceramic
Weight (grams)	3.1
Mounting	Adhesive or solder

¹ Output is ratiometric to excitation voltage

² The maximum recommended soldering temperature is +260°C

Wiring color code: +Excitation = Pin 3; -Excitation = Pin 1; +Output = Pin 4; -Output = Pin 5; No Connection = Pin 2
(Pin 2 is used for trimming during assembly and should not be connected)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number+Range+Electrical Connection

3052-GGG-P

| |
 | | Electrical Connection (P=pins)
 | Range (010 is 10g)

Example: 3052-010-P
Model 3052, 10g, Pins