


NAIS

## 10 A Slim Power Relay

LK-P  
RELAYS



mm inch

### FEATURES

- 1. High switching capacity: 10 A 277V AC**
- 2. High insulation resistance between contact and coil**
  - 1) Creepage distance and clearances between contact and coil: Min. 6 mm .236 inch (In compliance with IEC65)
  - 2) Surge withstand voltage between contact and coil: 10,000 V
- 3. High noise immunity realized by the card separation structure between contact and coil**

- 4. Popular terminal pitch in AV equipment field**
- 5. Space-saving slim type**  
Base area: Width 11 × Length 24 mm  
Width .433 × Length .945 inch
- 6. Conforms to the various safety standards**  
UL/CSA, VDE, TÜV and SEMKO, SEV approved

### SPECIFICATIONS

#### Contact

Arrangement		1 Form A
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)		Max. 100 mΩ
Contact material		Silver alloy
Rating (resistive load)	Nominal switching capacity	10 A 277 V AC, 5 A 30V DC
	Max. switching power	2,770 V A, 150W
	Max. switching voltage	277 V AC, 30 V DC
	Max. switching current	10 A (AC), 5A (DC)
Expected life (min. operations)	Mechanical (at 180 cpm)	2 × 10 <sup>6</sup>
	Electrical (at 20 cpm) (at rated load)	10 <sup>5</sup>

#### Coil

Nominal operating power	530 mW
-------------------------	--------

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*1 Measurement at same location as "Initial breakdown voltage" section.
- \*2 Detection current: 10mA
- \*3 Wave is standard shock voltage of ±1.2 × 50μs according to JEC-212-1981
- \*4 Excluding contact bounce time.
- \*5 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs
- \*6 Half-wave pulse of sine wave: 6 ms
- \*7 Detection time: 10 μs
- \*8 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61).

#### Characteristics

Max. operating speed		20 cpm (at rated load)
Initial insulation resistance*1		Min. 1,000 MΩ (at 500 V DC)
Initial *2 breakdown voltage	Between open contacts	1,000 Vrms for 1 min.
	Between contact and coil	4,000 Vrms for 1 min.
Initial surge voltage between contact and coil*3		Min. 10,000 V
Operate time*4 (at nominal voltage)		Approx. 7 ms (at 20°C 68°F)
Release time (without diode)*4 (at nominal voltage)		Approx. 2 ms (at 20°C 68°F)
Temperature rise (at 70°C)		Max. 45°C with nominal coil voltage and at 10 A contact carrying current (resistance method)
Shock resistance	Functional*5	Min. 200 m/s <sup>2</sup> {approx. 20 G}
	Destructive*6	Min. 1,000 m/s <sup>2</sup> {approx. 100 G}
Vibration resistance	Functional*7	10 to 55Hz at double amplitude of 1.5mm
	Destructive	10 to 55Hz at double amplitude of 1.5mm
Conditions for operation, transport and storage*8 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +70°C -40°F to +158°F
	Humidity	5 to 85% R.H.
	Air pressure	86 to 106 kPa
Unit weight		Approx. 12 g .42 oz

### TYPICAL APPLICATIONS

- Audio visual equipment  
TVs, VTRs
- Office equipment  
LBP, CRT
- Home appliances  
Refrigerator, Air conditioner

### ORDERING INFORMATION

Ex. LKP 1a F - 12V

Contact arrangement	Protective construction	Coil voltage(DC)
1a: 1 Form A	F: Flux-resistant type	12, 24V

- UL/CSA, TÜV, SEMKO, TV-5 approved type is standard.  
 Notes 1. Standard packing Carton: 100 pcs. Case: 500 pcs.  
 2. 5 V, 9 V, 18 V DC types are also available. Please consult us for details.


# LK-P

## TYPES AND COIL DATA (at 20°C 68°F)


Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.) (Initial)	Drop-out voltage, V DC (min.) (Initial)	Coil resistance, Ω (±10%)	Nominal operating current, mA (±10%)	Nominal operating power, mW	Maximum allowable voltage, V DC (at 20°C 68°F)
LKP1aF-12V	12	8.4	1.2	272	44.2	530	15.6
LKP1aF-24V	24	16.8	2.4	1,087	22.1	530	31.2

## DIMENSIONS

mm inch

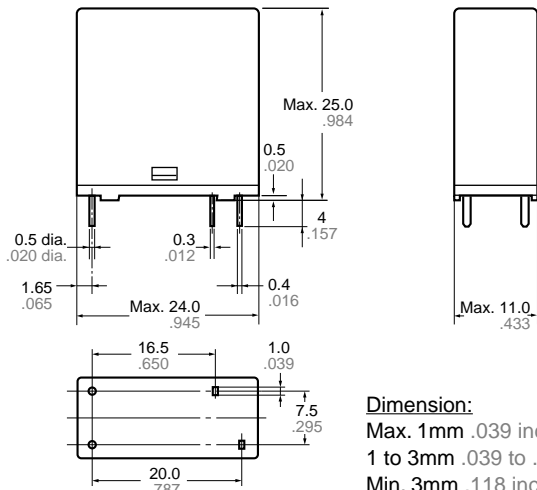

PC board pattern (Bottom view)

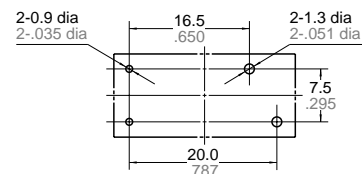


Tolerance: ±0.1 ±.004

Schematic (Bottom view)




## REFERENCE DATA

### 1. Max. switching power

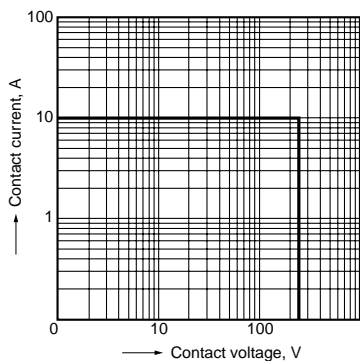


### 2. Coil temperature rise

Sample: LKP1aF-12V, 6 pcs.  
Point measured: coil inside  
Contact current: 5 A, 10 A

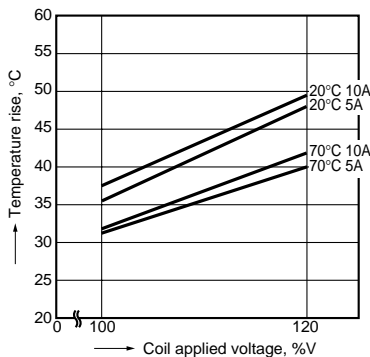


### 3. Ambient temperature characteristics and coil applied voltage

Contact current: 10 A

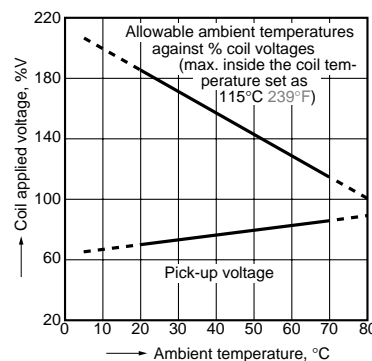


### 4. Life curve

Operation frequency: 20 times/min.  
(ON/OFF = 1.5s: 1.5s)  
Ambient temperature: room temperature

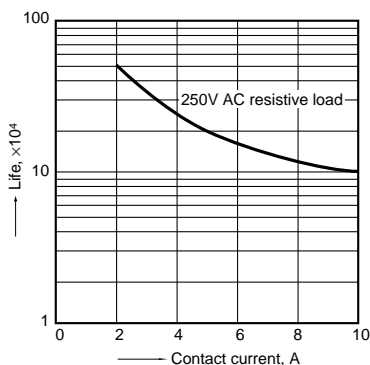


5. Electrical life test  
 (10 A 250 V AC, resistive load)  
 Sample: LKP1aF-12V, 6 pcs.  
 Operation frequency: 20 times/min.  
 (ON/OFF = 1.5s: 1.5s)  
 Ambient temperature: 20°C 68°F


Circuit:

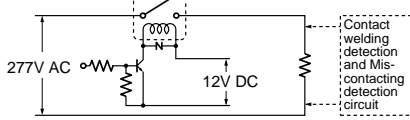

Change of pick-up and drop-out voltage

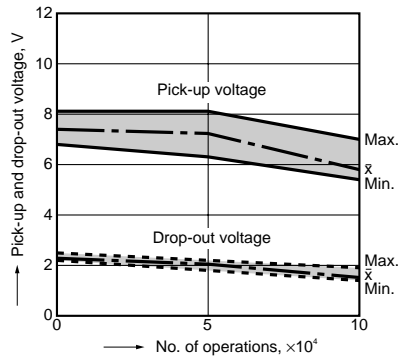

Change of contact resistance

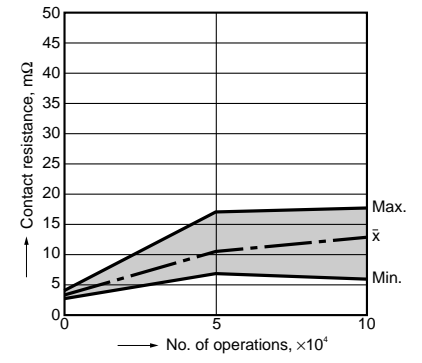

**For Cautions for Use, see Relay Technical Information (Page 48 to 76).**