


Panasonic
ideas for life

**ULTRA-SMALL PACKAGE
FLAT POLARIZED RELAY**

GQ RELAYS (AGQ)



FEATURES

1. Compact flat body saves space

With a small footprint of 10.6 mm (L) × 7.2 mm (W) .417 inch (L) × .283 inch (W) for space savings, it also has a very short height of 5.2 mm .205 inch. (Standard PC board type.)

2. Outstanding surge resistance.

Surge breakdown voltage between contacts and coil:
2,500 V 2×10 μs (Telcordia)
Surge breakdown voltage between open contacts:
1,500 V 10×160 μs (FCC part 68)

3. The use of twin crossbar contacts ensures high contact reliability.

AgPd contact is used because of its good sulfide resistance. Adopting low-gas molding material. Coil assembly molding technology which avoids generating volatile gas from coil.

4. Increased packaging density

Due to highly efficient magnetic circuit design, leakage flux is reduced and changes in electrical characteristics from components being mounted close-together are minimized. This all means a packaging density higher than ever before.

5. Nominal operating power: 140 mW

6. Outstanding vibration and shock resistance.

Functional shock resistance: 750 m/s²
Destructive shock resistance: 1,000 m/s²
Functional vibration resistance:
10 to 55 Hz (at double amplitude of 3.3 mm .130 inch)
Destructive vibration resistance:
10 to 55 Hz (at double amplitude of 5 mm .197 inch)

7. Sealed construction allows automatic washing.

TYPICAL APPLICATIONS

1. Telephone switchboard
2. Telecommunications equipment
3. Measurement equipment
4. Consumer electronic and audio visual equipment

RoHS Directive compatibility information
<http://www.mew.co.jp/ac/e/environment/>

ORDERING INFORMATION

AGQ **2** **0**

Contact arrangement
2: 2 Form C

Operating function
0: Single side stable
1: 1 coil latching

Type of operation
0: Standard type (B.B.M.)

Terminal shape
Nil: Standard PC board terminal
A: Surface-mount terminal A type
S: Surface-mount terminal S type

Coil voltage (DC)
1H: 1.5V 03: 3V 4H: 4.5V 06: 6V 09: 9V
12: 12V 24: 24V

Packing style
Nil: Tube packing
X: Tape and reel packing (picked from 1/2/3/4 pin side)
Z: Tape and reel packing (picked from 5/6/7/8 pin side)

TYPES**1. Standard PC board terminal**

Nominal coil voltage	Single side stable	1 coil latching
	Part No.	Part No.
1.5V DC	AGQ2001H	AGQ2101H
3V DC	AGQ20003	AGQ21003
4.5V DC	AGQ2004H	AGQ2104H
6V DC	AGQ20006	AGQ21006
9V DC	AGQ20009	AGQ21009
12V DC	AGQ20012	AGQ21012
24V DC	AGQ20024	AGQ21024

Standard packing: Tube: 50 pcs.; Case: 1,000 pcs.

2. Surface-mount terminal**1) Tube packing**

Nominal coil voltage	Single side stable	1 coil latching
	Part No.	Part No.
1.5V DC	AGQ200□1H	AGQ210□1H
3V DC	AGQ200□03	AGQ210□03
4.5V DC	AGQ200□4H	AGQ210□4H
6V DC	AGQ200□06	AGQ210□06
9V DC	AGQ200□09	AGQ210□09
12V DC	AGQ200□12	AGQ210□12
24V DC	AGQ200□24	AGQ210□24

□: For each surface-mounted terminal identification, input the following letter. A type: A, S type: S

Standard packing: Tube: 50 pcs.; Case: 1,000 pcs.

2) Tape and reel packing

Nominal coil voltage	Single side stable	1 coil latching
	Part No.	Part No.
1.5V DC	AGQ200□1HZ	AGQ210□1HZ
3V DC	AGQ200□03Z	AGQ210□03Z
4.5V DC	AGQ200□4HZ	AGQ210□4HZ
6V DC	AGQ200□06Z	AGQ210□06Z
9V DC	AGQ200□09Z	AGQ210□09Z
12V DC	AGQ200□12Z	AGQ210□12Z
24V DC	AGQ200□24Z	AGQ210□24Z

□: For each surface-mounted terminal identification, input the following letter. A type: A, S type: S

Standard packing: Tape and reel: 900 pcs.; Case: 1,800 pcs.

Notes: 1. Tape and reel packing symbol "-Z" is not marked on the relay. "X" type tape and reel packing (picked from 1/2/3/4-pin side) is also available.

2. Please inquire if you require a relay, between 1.5 and 24 V DC, with a voltage not listed.

RATING**1. Coil data****1) Single side stable type**

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. allowable voltage (at 20°C 68°F)
1.5V DC	75%V or less of nominal voltage* (Initial)	10%V or more of nominal voltage* (Initial)	93.8mA	16Ω	140mW	150%V of nominal voltage
3V DC			46.7mA	64.2Ω		
4.5V DC			31mA	145Ω		
6V DC			23.3mA	257Ω		
9V DC			15.5mA	579Ω		
12V DC			11.7mA	1,028Ω		
24V DC			9.6mA	2,504Ω	230mW	120%V of nominal voltage

2) 1 coil latching type

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. allowable voltage (at 20°C 68°F)
1.5V DC	75%V or less of nominal voltage* (Initial)	75%V or less of nominal voltage* (Initial)	66.7mA	22.5Ω	100mW	150%V of nominal voltage
3V DC			33.3mA	90Ω		
4.5V DC			22.2mA	202.5Ω		
6V DC			16.7mA	360Ω		
9V DC			11.1mA	810Ω		
12V DC			8.3mA	1,440Ω		
24V DC			5.0mA	4,800Ω	120mW	

*Pulse drive (JIS C 5442-1996)

GQ (AGQ)

2. Specifications


Characteristics	Item	Specifications	
Contact	Arrangement	2 Form C	
	Initial contact resistance, max.	Max. 100 mΩ (By voltage drop 6 V DC 1A)	
	Contact material	Stationary contact: AgPd+Au clad Movable contact: AgPd	
Rating	Nominal switching capacity (resistive load)	1 A 30 V DC, 0.3 A 125 V AC	
	Max. switching power (resistive load)	30 W (DC), 37.5 V A (AC)	
	Max. switching voltage	110 V DC, 125 V AC	
	Max. switching current	1 A	
	Min. switching capacity (Reference value)*1	10μA 10 mV DC	
	Nominal operating power	Single side stable	140mW (1.5 to 12 V DC), 230mW (24 V DC)
		1 coil latching	100mW (1.5 to 12 V DC), 120mW (24 V DC)
Electrical characteristics	Insulation resistance (Initial)	Min. 1,000MΩ (at 500V DC) Measurement at same location as "Initial breakdown voltage" section.	
	Breakdown voltage (Initial)	Between open contacts	750 Vrms for 1min. (Detection current: 10mA)
		Between contact and coil	1,500 Vrms for 1min. (Detection current: 10mA)
		Between contact sets	1,000 Vrms for 1min. (Detection current: 10mA)
	Surge breakdown voltage (Initial)	Between open contacts	1,500 V (10×160μs) (FCC Part 68)
		Between contacts and coil	2,500 V (2×10μs) (Telcordia)
	Temperature rise (at 20°C 68°F)	Max. 50°C (By resistive method, nominal voltage applied to the coil; contact carrying current: 1A.)	
	Operate time [Set time] (at 20°C 68°F)	Max. 4 ms [Max. 4 ms] (Nominal voltage applied to the coil, excluding contact bounce time.)	
Release time [Reset time] (at 20°C 68°F)	Max. 4 ms [Max. 4 ms] (Nominal voltage applied to the coil, excluding contact bounce time.) (without diode)		
Mechanical characteristics	Shock resistance	Functional	Min. 750 m/s ² (Half-wave pulse of sine wave: 6 ms; detection time: 10μs.)
		Destructive	Min. 1,000 m/s ² (Half-wave pulse of sine wave: 6 ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10μs.)
		Destructive	10 to 55 Hz at double amplitude of 5 mm
Expected life	Mechanical	Min. 5 × 10 ⁷ (at 180 cpm)	
	Electrical	Min. 10 ⁵ (1 A 30 V DC resistive), 10 ⁵ (0.3 A 125 V AC resistive) (at 20 cpm)	
Conditions	Conditions for operation, transport and storage*2	Ambient temperature: -40°C to +85°C -40°F to +185°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)	
	Max. operating speed (at rated load)	20 cpm	
Unit weight		Approx. 1 g .035 oz	

Notes: *1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.


*2 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT .

REFERENCE DATA

1. Max. switching capacity

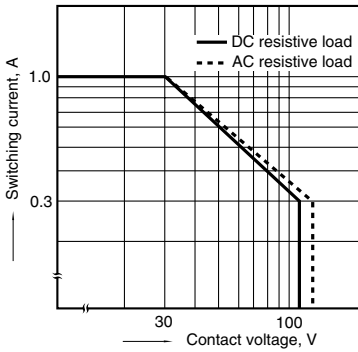


2. Life curve

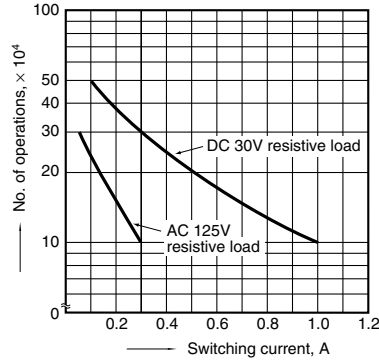

3. Mechanical life

Tested sample: AGQ200A4H, 6 pcs.
Operating speed: 180 cpm

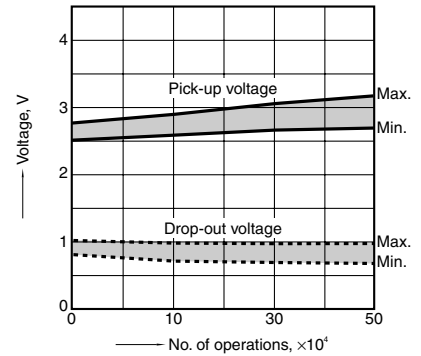


4. Electrical life (1A 30V DC resistive load)


Tested sample: AGQ200A4H, 6 pcs.

Operating speed: 20 cpm

Change of pick-up and drop-out voltage

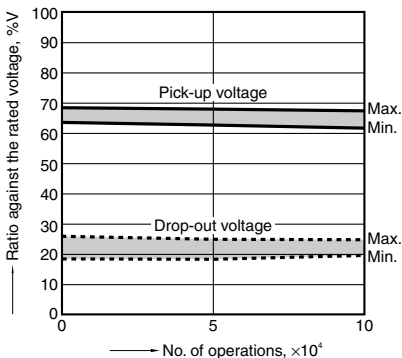

Change of contact resistance

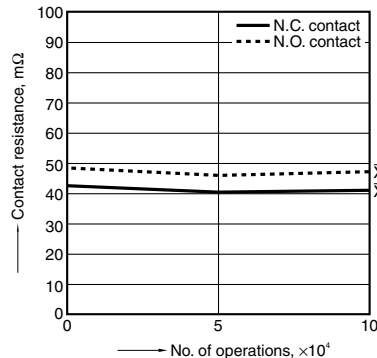


5. Coil temperature rise


Tested sample: AGQ200A4H, AGQ200A24, 6 pcs.

Point measured: Inside the coil


Ambient temperature: Room temperature

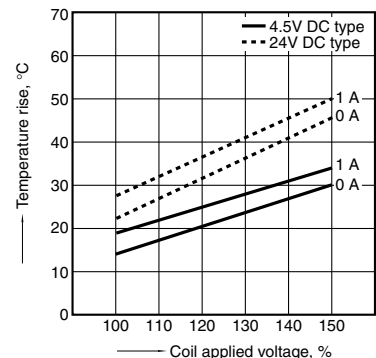


6-(1). Operate and release time (without diode)
Tested sample: AGQ2004H, 10 pcs.

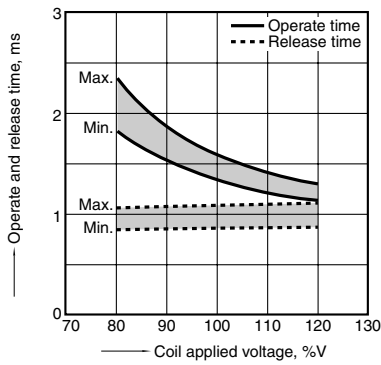


6-(2). Operate and release time (with diode)
Tested sample: AGQ2004H, 10 pcs.

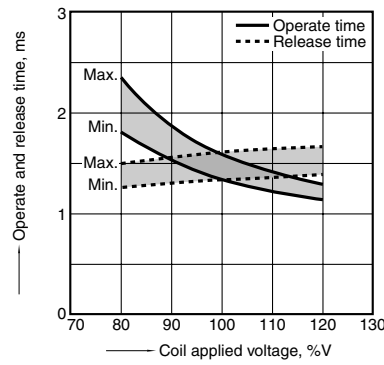


7. Ambient temperature characteristics
Tested sample: AGQ2004H, 6 pcs.

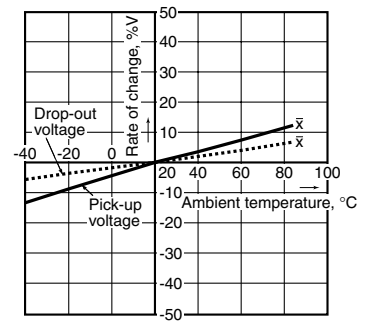


8. Malfunctional shock
Tested sample: AGQ2004H, 6 pcs.

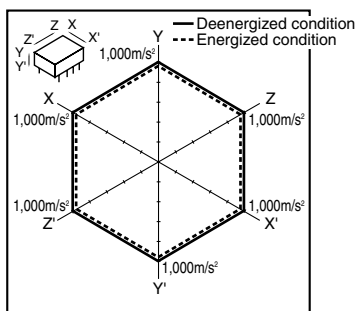

9-(1). Influence of adjacent mounting
Tested sample: AGQ20012, 6 pcs.

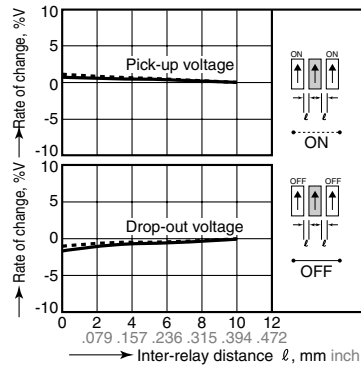



9-(2). Influence of adjacent mounting
Tested sample: AGQ20012, 6 pcs.

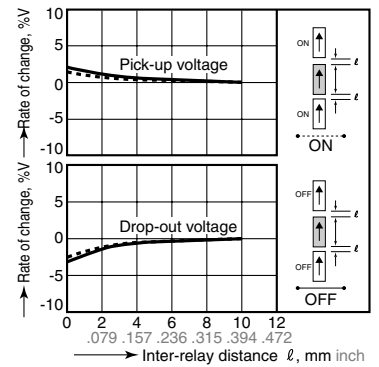


GQ (AGQ)

DIMENSIONS (Unit: mm inch)

1. PC board terminal

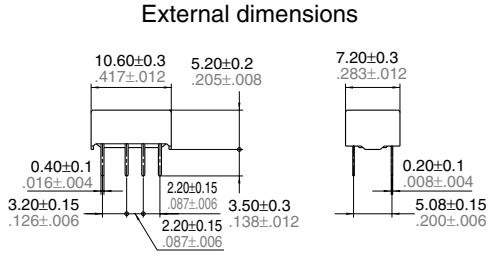


PC board pattern



Tolerance: ±0.1 ±.004

Schematic (Bottom view)

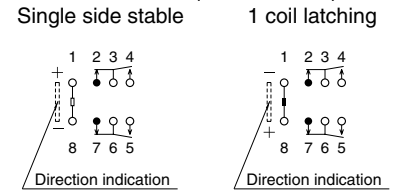

(Deenergized condition)

(Reset condition)


2. Surface-mount terminal



Type	External dimensions	Suggested mounting pad (Tolerance: ±0.1 ±.004)
	Single side stable and 1 coil latching	Single side stable and 1 coil latching
A type	<p>Dimensions (mm/inch): Max. 5.40 / .213, 10.60±0.3 / .417±.012, 7.20±0.3 / .283±.012, 0.40±0.1 / .016±.004, 2.20±0.15 / .087±.006, 2.20±0.15 / .087±.006, 3.20±0.15 / .126±.006, 0.20±0.1 / .008±.004, 5.08±0.15 / .200±.006, 8.40±0.3 / .331±.012</p>	<p>Dimensions (mm/inch): 3.20 / .126, 2.20 / .087, 2.20 / .087, 2.66 / .105, 6.74 / .265, 0.80 / .031</p>
S type	<p>Dimensions (mm/inch): Max. 5.40 / .213, 10.60±0.3 / .417±.012, 7.20±0.3 / .283±.012, 0.40±0.1 / .016±.004, 2.20±0.15 / .087±.006, 2.20±0.15 / .087±.006, 3.20±0.15 / .126±.006, 0.20±0.1 / .008±.004, 5.08±0.15 / .200±.006, 7.20±0.3 / .283±.012</p>	<p>Dimensions (mm/inch): 3.20 / .126, 2.20 / .087, 2.20 / .087, 2.06 / .081, 6.14 / .242, 0.80 / .031</p>


Schematic (Top view)

Single side stable



(Deenergized condition)

1 coil latching



(Reset condition)

NOTES

1. Coil operating power

1) As a general rule, only a pure DC power supply should be used for the coil drive.

2) To ensure proper operation, the voltage applied to both terminals of the coil should be $\pm 5\%$ (at 20°C 68°F) the rated operating voltage of the coil. Also, be aware that the pick-up and drop-out voltages will fluctuate depending on the ambient temperature and operating conditions.

3) The ripple factor for the voltage applied to the coil should be less than 5%.

4) For set and reset latching relays, the rated operating voltage should be applied to the coil for 10 ms or more.

2. Coil connection

When connecting coils, refer to the wiring diagram to prevent mis-operation or malfunction.

3. External magnetic field

Since GQ relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.



4. Cleaning

In automatic cleaning, cleaning with the boiling method is recommended. Avoid ultrasonic cleaning which subject the relay to high frequency vibrations. It may cause the contacts to stick.

It is recommended that a fluorinated hydrocarbon or other alcoholic solvent be used.

5. Packing style


1) The relay is packed in a tube with the relay orientation mark on the left side, as shown in the figure below.

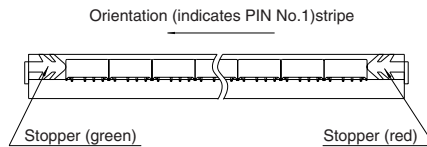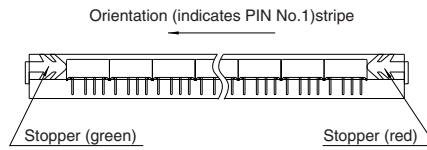

2) Tape and reel packing


(A type)

(1)-1 Tape dimensions

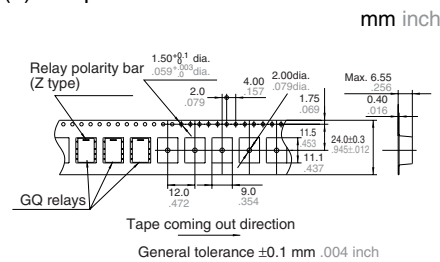


(S type)

(1)-2 Tape dimensions

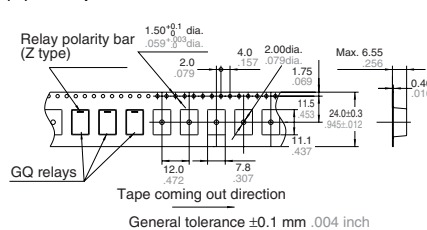

(2) Dimensions of plastic peel

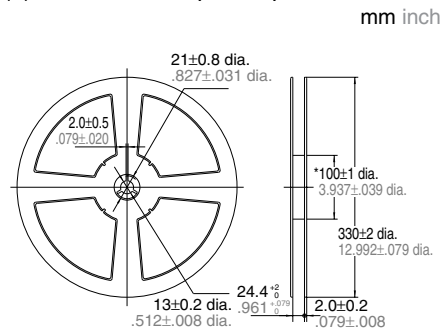

Note: Dimensions of items produced after December 2006 have changed as shown below.
100^{±1} dia. 3.937^{±0.039} dia. → 80^{±1} dia. 3.150^{±0.039} dia.


6. Automatic insertion

To maintain the internal function of the relay, the chucking pressure should not exceed the values below.

Chucking pressure in the direction A : 9.8 N {1 kgf} or less

Chucking pressure in the direction B : 9.8 N {1 kgf} or less

Chucking pressure in the direction C : 9.8 N {1 kgf} or less



Please chuck the shaded portion. Avoid chucking the center of the relay. In addition, excessive chucking pressure to the pinpoint of the relay should be also avoided.

For Cautions for Use, see Relay Technical Information.