

FIBERPOINT® 250


Order Number: 1401000002



Ferrule 2.5 mm

Applications:

- The compact design of the visual fault locator is very suitable for the **daily use** in all fiber optic applications e.g. **the field, under industrial conditions as well as in laboratories.**
- Used to check **singlemode/multimode** optical fibers and other fiber optic components on faults.
- **Patching**

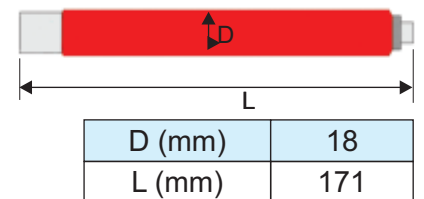

Parameter	Min.	Typ.	Max.
Wavelength		635 nm	
Operation temperature	- 10 °C		45 °C
Storage temperature	- 40 °C		70 °C
Fiber coupled power	(Singlemode fiber 9/125 μm)	500 μW	600 μW
	(Multimode fiber 50/125 μm)	500 μW	600 μW
Optical output power			1 mW
Operation current		40 mA	
Retention force for ferrule		1-2 N	
Weight incl. batteries		60 g	
Operation time - one battery pack ¹ (Pulsed mode)		40 hours	
Battery type		AAA	
Operation mode	Pulsed mode: Frequency 2-3 Hz		
Laser protection class	2		
Suitable ferrule 2.5 mm	DIN, E2000, FC, SC, ST		
Safety class	IP67		

Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)

Included in delivery:

- Dust cap
- One battery pack
- Instruction manual

Accessories (not included):

- Adapter 2.50 mm to 1.25 mm (Small-Form-Factor)

Notes: Do not use rechargeable batteries.
The above product specifications are subject to change without notice.

¹⁾ Battery: VARTA Industrial Alkaline No. 4003;
1.5 V; AAA; LR03 Micro; AM4; MN2400

Fiber Optic Fault Locator

made in Germany

FIBERPOINT® 250D


Order Number: 1401000013



Ferrule 2.5 mm

Applications:

- The compact design of the visual fault locator is very suitable for the **daily use** in all fiber optic applications e.g. **the field, under industrial conditions as well as in laboratories.**
- Used to check **singlemode/multimode** optical fibers and other fiber optic components on faults.
- **Patching**

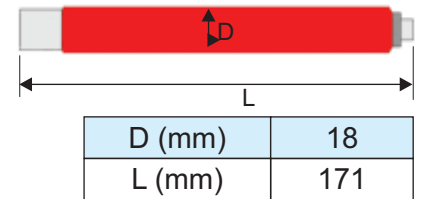

Parameter	Min.	Typ.	Max.
Wavelength		635 nm	
Operation temperature	- 10 °C		45 °C
Storage temperature	- 40 °C		70 °C
Fiber coupled power	(Singlemode fiber 9/125 μm)	500 μW	600 μW
	(Multimode fiber 50/125 μm)	500 μW	600 μW
Optical output power			1 mW
Operation current		40 mA	
Retention force for ferrule		1-2 N	
Weight incl. batteries		60 g	
Operation time - one battery pack ¹ (Pulsed mode)		40 hours	
Battery type		AAA	
Operation mode	Continuous Wave		
Laser protection class	2		
Suitable ferrule 2.5 mm	DIN, E2000, FC, SC, ST		
Safety class	IP67		

Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)

Included in delivery:

- Dust cap
- One battery pack
- Instruction manual

Accessories (not included):

- Adapter 2.50 mm to 1.25 mm (Small-Form-Factor)

Notes: Do not use rechargeable batteries.
The above product specifications are subject to change without notice.

¹⁾ Battery: VARTA Industrial Alkaline No. 4003;
1.5 V; AAA; LR03 Micro; AM4; MN2400