

Loop-powered LCD indicator

5531



- 4 digit 1/8 DIN (48 x 96 mm) loop-powered LCD display
- Easy push-button configuration
- Backlit LCD display is readable in low light conditions
- Display can be mounted in the safe area or in I.S. / Ex zone 2



Application

- The 5531 indicator is powered by the 4 to 20 mA current loop and is easily scaled to display the correct process value.
- Because it does not require separate power wiring, the 5531 is perfect for remote display of process loops.
- The 5531A display can be panel mounted in the safe area or I.S. / Ex Zone 2 (gas).

Technical characteristics



- With a full measurement range of 3.6 to 23 mA, the 5531 is NAMUR NE43 compliant.
- The display can be push-button scaled to any range between -9999 to 9999, and reverse display action is possible.
- The LCD backlight can be set to half or full intensity for easy viewing in low light conditions.
- The display only requires 1.5 VDC, (75 Ω loop load), with the backlight turned off.
- The input is HART[®] transparent.
- The front push-buttons can be disabled to prevent unauthorized adjustment.

Mounting / installation

- Once panel mounted with the included gasket, the 5531 provides IP65 ingress protection.

Connections

Input signal:

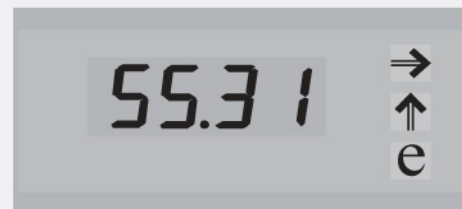

Order:

Type	Input signal area classification	Field enclosure
5531A	4...20 mA from safe and zone 2	No

Environmental Conditions

Specifications range..... -20°C to +60°C
 Storage temperature..... -20°C to +60°C
 Calibration temperature..... 20...28°C
 Relative humidity..... < 95% RH (non-cond.)
 Protection degree..... IP65, from front

Mechanical specifications

Dimensions (HxWxD)..... 48 x 96 x 120 mm
 Cut out dimensions..... 44.5 x 91.5 mm
 Weight approx..... 200 g
 Wire size, connector terminal
 1 - 4..... 0.13...2.08 mm² / AWG
 26...14 stranded wire
 Screw terminal torque..... 0.5 Nm
 Cable glands and cable diameter..... M16 x 1.5 / Ø 5...8 mm

Common specifications

Supply voltage..... Input loop-powered
 Signal / noise ratio..... > 60 dB
 Response time (0...90%, 100...10%)..... < 1 s
 Updating time..... 500 ms
 EMC immunity influence..... < ±0.5% of span

Input specifications

Input range..... 4...20 mA
 Measurement range..... 3.6...23 mA
 Input voltage drop, without
 backlight..... < 1.5 V @ 20 mA
 Input voltage drop, with full
 backlight..... < 10.5 V @ 20 mA
 Loop error detection, 4...20
 mA: Low..... ~ < 3 mA
 Loop error detection, 4...20
 mA: High..... ~ > 24 mA

Approvals

LVD..... EN 61010-1
 EMC..... EN 61326-1
 ATEX..... KEMA 05ATEX1044 X
 (5531A/B1)
 GOST R..... Yes

Output specifications

Display readout..... ± 9999 (4 digits)
 Digit height..... 16 mm