

OKI electronic components

OC808

Reflector-Type Photo Interrupter

GENERAL DESCRIPTION

The OC808 is a reflector-type photo interrupter that contains a high-output infrared light emitting diode and high-sensitivity phototransistor.

FEATURES


- High output
- Compact, capable of reading 0.5 mm bar codes
- Outstanding durability and high reliability

APPLICATIONS


- Bar code reader
- Photoswitch
- Position detector
- Paper edge sensor

PIN CONFIGURATION

(Unit: mm)

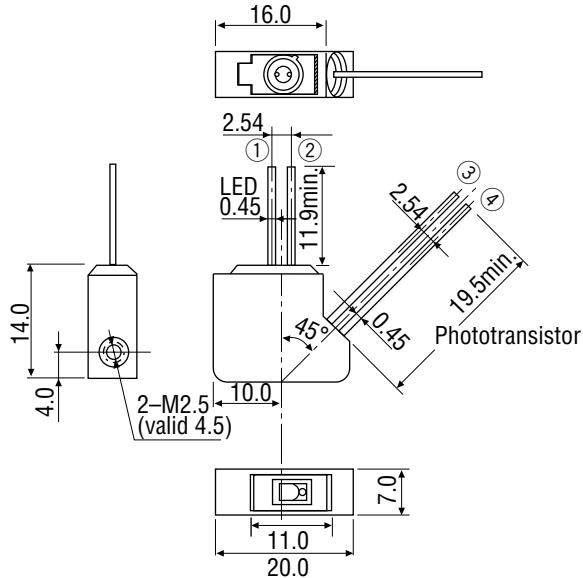

• Pin Connection Diagram



ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Test Condition	Rating	Unit
Input	Foward Current	I_F	Ta=25°C	100	mA
	Pulse Foward Current *1	I_{FRM}		1	A
	Reverse Voltage	V_R		6	V
	Power Dissipation	P_D		200	mW
Output	Collector-emitter Voltage	V_{CEO}		20	V
	Emitter-collector Voltage	V_{ECO}		5	V
	Power Dissipation	P_C		150	mW
Operating Temperature		T_{opr}	—	-20 to +65	°C
Storage Temperature		T_{stg}	—	-20 to +85	°C

*1 Pulse width $t_w=100 \mu s$, cycle T=10 ms

- **Wavelength at Peak Emission/Sensitivity**

Light source : 910 nm

Photodetector : 800 nm

ELECTRICAL CHARACTERISTICS

(Ambient Temperature Ta=25°C)


Parameter		Symbol	Min.	Typ.	Max.	Unit	Test Condition
Input	Foward Voltage	V_F	—	1.55	2.0	V	$I_F=100 \text{ mA}$
	Reverse Current	I_R	—	—	10	μA	$V_R=6 \text{ V}$
Output	Dark Current	I_D	—	—	100	nA	$V_{CE}=9 \text{ V}$
Coupled	Photocurrent	I_P	8.0	—	80	μA	*1
	S/N	—	2.5	—	—	—	
	Photocurrent	I_P	10.0	—	100	μA	*2

*1 $I_F=50 \text{ mA}$, $V_{CC}=10 \text{ V}$, $R_L=10 \text{ k}\Omega$; distance between paper surface and sensor $g=1.0 \text{ mm}$
Facsimile chart 0.5mm bar code


*2 $I_F=50 \text{ mA}$, $V_{CC}=10 \text{ V}$, $R_L=10 \text{ k}\Omega$; distance between paper surface and sensor $g=1.0 \text{ mm}$
White area of facsimile chart

TYPICAL CHARACTERISTICS


- Output Current vs. Paper Surface-Sensor Spacing ($T_a=25^\circ\text{C}$)

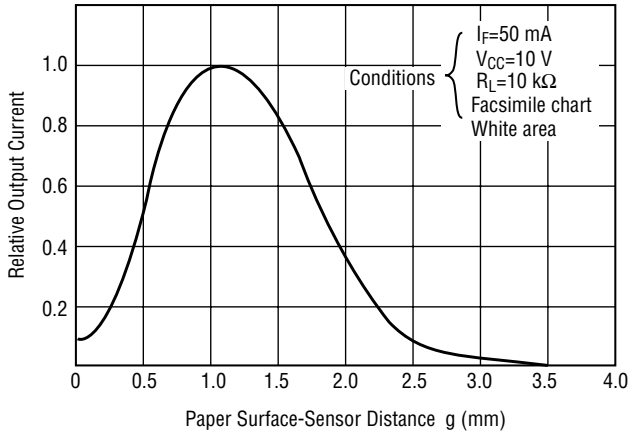


- Output Current vs. Paper Surface-Sensor Spacing

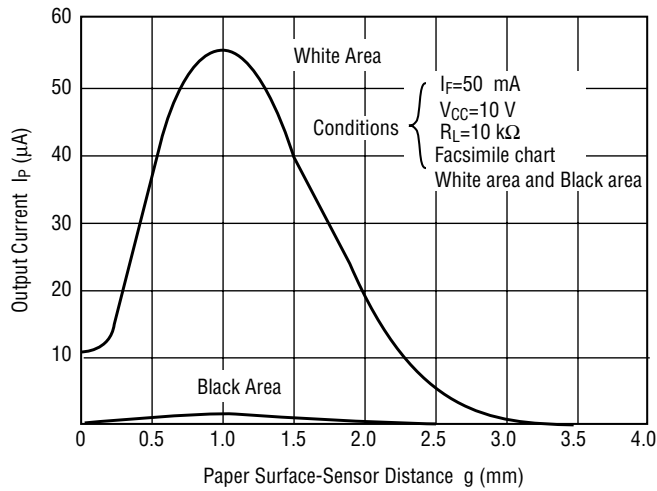


• Output Current vs. Forward Current ($T_a=25^\circ\text{C}$)

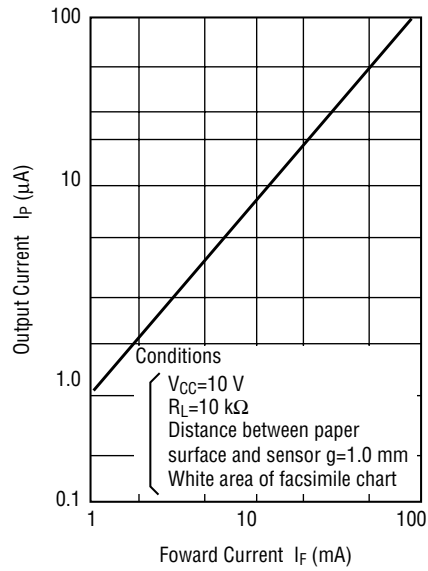

• Switching Time vs. Load Resistance ($T_a=25^\circ\text{C}$)

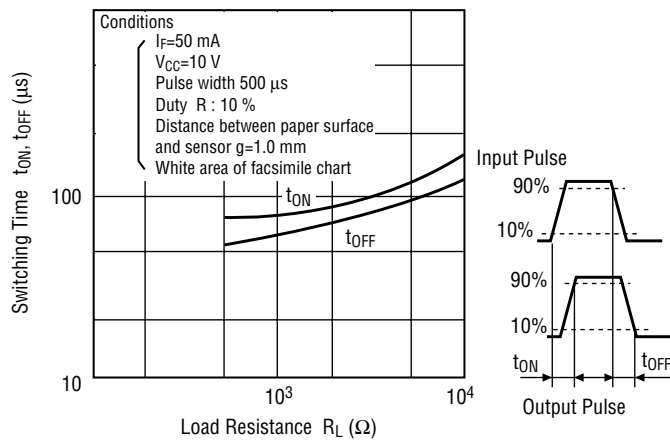


• Bar Code (0.5mm) Output Current vs. Travel length (Ta=25°C)

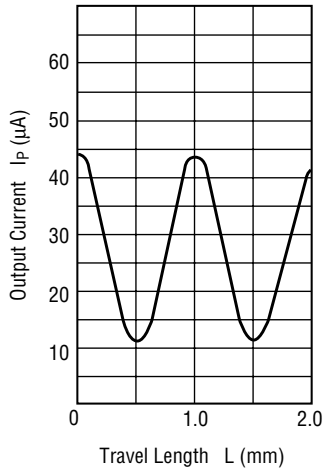


Conditions
 $I_F=50$ mA
 $V_{CC}=10$ V
 $R_L=10$ k Ω
 Distance between paper surface and sensor $g=1.0$ mm
 Facsimile chart bar code 0.5 mm

• Output Current vs. Bar Code Width (Ta=25°C)

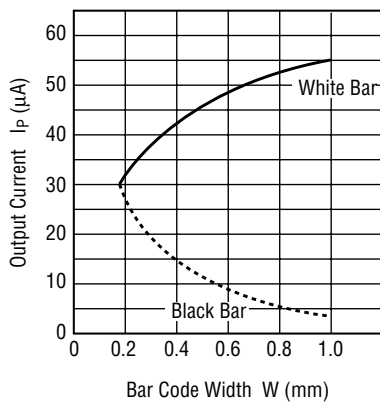

Conditions
 $I_F=50$ mA
 $V_{CC}=10$ V
 $R_L=10$ k Ω
 Distance between paper surface and sensor $g=1.0$ mm
 Facsimile chart bar code

• Output Current vs. Ambient Temperature

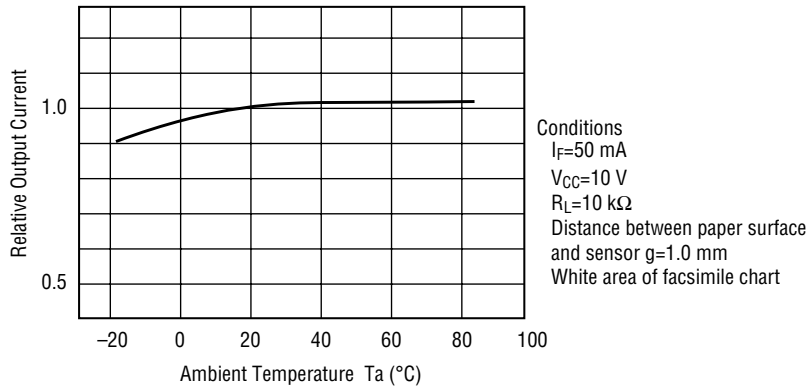

• Test Circuit

