



*Achieving
Excellence through
Commitment to Quality*



DURAKOOL

Switches & Sensors



American Electronic Components, Inc
1101 Lafayette Street
Elkhart, IN 46516
Tel: (574)-264-6099 Ext 501
Tel: (888) 847-6552: Fax: (574) 293-8013

Mission Statement

American Electronic Components, Inc., is a designer and manufacturer of electrical and electronic components focused on niche markets for sensors, switches, and relays. The Company is dedicated to providing the highest quality components and service which exceed the needs and wants of its customers. We are growth oriented and practice integrity and fairness when dealing with all stakeholders of the business. We will continue our leadership position and display a marketing orientation while satisfying customers with products that complement our existing sensor, switch, and relay technology. AEC is committed to earning a profit, so the Company will remain financially strong and perpetuate this philosophy.

Lab Accreditation



The AEC Quality Assurance Laboratory is accredited by the American Association for Laboratory Accreditation (A2LA). A2LA is important to AEC and its customers since it allows us to perform timely design validation, product validation, and continuous conformance evaluation on our products. This accreditation is a critical asset and demonstrates AEC's continuing commitment to the pursuit of quality.

Features

Hermetically Sealed	Contacts are impervious to external contaminants
Self-renewing contacts	No contacts to clean or adjust
Reliable	Liquid mercury contacts
Long Life	Superior performance over conventional contacts
Low Contact Resistance	Stable over life
Metal Construction	Unlike glass, virtually indestructible



Glass Breaks — Metal Bounces

Options

Durakool switches and sensors are available in normally-open or normally-closed contact forms, and in sizes for milli-amp signal loads to 25-amp power switching loads. They are available in single-throw and double-throw designs and can be insulated or non-insulated.

This catalog contains standard parts, but custom designs are available.

Applications



A sensor automatically shuts off a laptop computer when the screen is closed.



A motion sensor automatically shuts off an iron after a period of inertia.

Today's growing use of microprocessors with printed circuit boards in appliance, automotive, communication and other fields is creating many new applications uniquely suited to Durakool switches and sensors. Worldwide efforts focusing on product safety are opening many new motion, position, and tip-over applications, such as shut-offs for area space heaters.

Durakool switches have proven themselves in a wide variety of applications. Some of these include:

- ▲ Microprocessor control
- ▲ Convenience lights in automobile trunks, glove boxes, etc.
- ▲ Convenience lamps in freezer lids
- ▲ Pump floats
- ▲ Motor or lamp control in dirty environments
- ▲ Indication of position or inclination
- ▲ Triggers for alarm/security systems
- ▲ Machine limit switches
- ▲ Remote control of relays/solenoids
- ▲ Electronic games and toys
- ▲ G-Force/Inertia


DURAKOOL Non-Insulated Tilt and Position Switches

Durakool tilt switches "make" when the electrode is tilted below horizontal and "break" when tilted above horizontal. Total travel from "make" to "break" is the "Maximum Included Angle" shown below. The component to which the switch is

attached must have a total tilt angle greater than the "Maximum Included Angle" for proper operation. "G" series switches are mercury-to-mercury; "A" series are mercury-to-metal.

TYPE/SERIES	A $\frac{1}{2}$ S	A $\frac{1}{2}$ N	A $\frac{1}{2}$	AIS	AIN	G5N	G8N	G10N
PART NUMBER	4929	5002	4859**	AIS-017	20144	3822	3825	3765
Must Make/Break Angle* Max. Included Angle	-7°/+7° —	— 15°	-2°/+15° —	— 16°	-1°/+1° 1.5°	— 11°	— 11°	— 9°
Note: Switches are pictured in normally closed position.								
*Make/break angles are electrode + (above)/- (below) 0° horizontal reference.								
ELECTRICAL RATINGS								
AC Amps, 60Hz								
120V	—	1.0	—	*	1.0	7.0	15.0	25.0
240V	—	0.4	—	*	0.7	5.0	11.0	19.0
480V	—	—	—	*	—	—	8.0	13.0
DC Amps								
120V	#	0.5	—	*	0.5	5.0	8.0	13.0
240V	#	0.4	—	*	0.4	4.0	6.0	10.0
Tungsten Lamp (120V, 60Hz), Watts	—	60	—	75	100	700	1000	1700
Motor Load, Horsepower								
AC 60Hz, 120-480V	—	—	—	—	—	0.33	0.50	1.0
DC, 120-240V	—	—	—	—	—	0.25	0.33	0.5
Contact Resistance Milliohms (Typical)	—	80	150	30	200	3	3	3
Standoff Voltage, Contact to contact	—	1250	—	1500	1500	1500	2500	3000
ENGLISH DIMENSIONS								
Lbs./100 pcs.	—	0.33	—	0.68	1.10	1.88	4.59	5.62
Body Length, in. (less leads)	0.25	0.39	0.39	0.52	1.00	1.36	1.68	1.90
Max. Diameter, in.	0.27	0.27	0.27	0.34	0.389	0.42	0.50	0.62
METRIC DIMENSIONS								
Kg/100 pcs.	—	0.15	—	0.31	0.50	0.85	2.08	2.55
Length, cm	0.99	1.91	1.94	1.52	2.50	3.97	4.74	5.36
Max. Diameter, cm	0.67	0.67	0.67	0.85	0.90	1.06	1.27	1.56
Finish	Tin	Tin	Nickel**	Cadmium	Rust Inhibited	Rust Inhibited	Rust Inhibited	Rust Inhibited

0.5 Amps @ 12 VDC Max.
 * 1 Amp, 6-24V, AC/DC
 **Also Available Tin Plated (Part Number 4954)

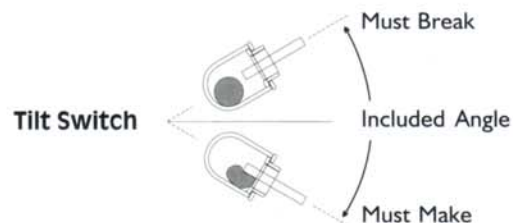





DURAKOOL Insulated Tilt and Position Switches

TYPE/SERIES	A1/2	A1	G5Z	G8Z	G10Z
PART NUMBER PVC Cotton Neoprene Silicone	(Select by Type and Leadwire Insulation)				
	A1/2-001 — — —	— A1-001 A1-002 A1-003	— G5Z-001 G5Z-002 G5Z-003	— G8Z-001 G8Z-002 G8Z-003	— G10Z-001 G10Z-002 G10Z-003
Max. Included Angle* *Switching occurs when body axis is near horizontal.	15°	15°	11°	9°	9°
					
ELECTRICAL RATINGS					
AC Amps, 60Hz					
120V	1.0	1.0	7.0	15.0	25.0
240V	0.4	0.7	5.0	11.0	19.0
480V	—	—	—	8.0	13.0
DC Amps					
120V	0.5	0.5	5.0	8.0	13.0
240V	0.4	0.4	4.0	6.0	10.0
Tungsten Lamp (120V, 60Hz), Watts	60	100	700	1000	1700
Motor Load, Horsepower					
AC 60Hz, 120-480V	—	—	0.33	0.50	1.0
DC, 120-240V	—	—	0.25	0.33	0.5
Contact Resistance Milliohms (Typical)	30	30	3	3	3
Standoff Voltage, Contact to contact Contact to ground	1250 1500	1500 5000	1500 5000	1500 5000	3000 5000
LEADWIRE INFORMATION					
Length, in.	6	6	6	6	6
Terminal	Spade	Ring	Ring	Ring	Ring
Hole Diameter	0.142	0.170	0.170	0.203	0.203
Machine Screw Size	#6	#8	#8	#10	#10
ENGLISH DIMENSIONS					
Lbs./100 pcs.	0.99	3.04	4.45	8.64	13.05
Body Length, in. (less leads)	0.96	1.31	1.81	2.03	2.38
Max. Diameter, in.	0.38	0.50	0.52	0.75	0.84
METRIC DIMENSIONS					
Kg/100 pcs.	0.45	1.38	2.02	3.92	5.92
Length, cm	2.44	3.33	4.60	5.15	6.03
Max. Diameter, cm	0.95	1.27	1.37	1.91	2.14
MOUNTING CLIP					
Single	—	122	122	122	122
Double	—	2023	2023	2008	2009


Not all part numbers are shown within a series. Angle specifications are dependent on rotation rates and electrical load parameters. For additional information, contact AEC Sales

DURAKOOL Tip-Over and Motion Switches


Durakool Tip-Over switches are specified by the angle of travel away from the vertical required to "make" or "break" the contact. The operating angle designed for the installation must be larger than this specification to ensure proper switch action.

TYPE/SERIES	TO3	TO8	TO8	TO8	A $\frac{1}{2}$ S	A $\frac{1}{2}$ S
PART NUMBER	TO3-1016 See Note 1	TO8-2009	20176	4539	4770	20243
Max. make/break angle (from 0° vertical reference)	10°/45°	12°/30°	10°/35°	25°/72°	15°/130°	Motion/vibration activated
Note: Switches are pictured in normally closed positions.						
ELECTRICAL RATINGS						
AC Amps, 60Hz 120V 240V DC Amps	12.5 6.0 —	1.7 0.75 1 (12VDC)	1.7 — —	1.7 — —	— — 0.5 (12VDC)	— — 0.5 (12VDC)
Tungsten Lamp (120V, 60Hz), Watts	1500 (Resistive)	—	—	—	—	—
Motor Load, Horsepower AC 60Hz, 120-240V	0.167	—	—	—	—	—
Contact Resistance Milliohms (Typical)	Meets UL Heat Rise Specification	5 Ohms @ 5 Volts/10mA*	Varied by Application	0.02 Ohms @ 1 Volt/10mA*	20 Ohms @ 1mA max.*	1 Ohm @ 5 Volts/ 1mA max.*
Standoff Voltage, Contact to Contact	1240	500	1240	500	—	200
ENGLISH DIMENSIONS Lbs./100 pcs. Body Length, in. (with leads) Max. Diameter, in.	3.20 0.87 0.94	1.7 .44 .477	0.77 1.08 0.60	0.77 0.65 0.60	— 0.84 0.27	0.31 0.627 0.31
METRIC DIMENSIONS Kg/100 pcs. Length, cm Max. Diameter, cm	1.45 2.21 2.40	0.76 1.13 1.22	0.35 2.74 1.52	0.35 1.65 1.52	— 2.12 0.67	0.13 1.6 0.79
Finish	Nickel	Acid Tin	Acid Tin	Nickel	Acid Tin	Acid Tin

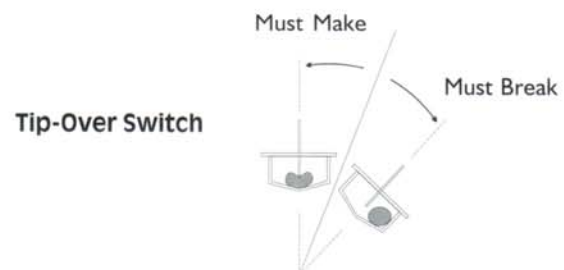

Note 1: TO3-1015 = 1/4" Male Quick Connect Center Elect. Mounting Terminal
TO3-1016 = 1/4" Male Quick Connect Center Elect., 1/4" Female 180°
TO3-1026 = 1/4" Male Quick Connect Center Elect., 1/4" Male 180°
*Varies by application



DURAKOOL Specialty Switches

TYPE	Single-pole	Wide Angle
PART NUMBER	20110	5199
Max. Included angle (from 0° vertical reference)	30° 	20° 
DESCRIPTION	Must make between 45° and 75° from vertical.	Must make between 50° and 70° from vertical.
ELECTRICAL RATINGS		
AC Amps, 60Hz 12 VDC	10 mA (max) all voltages	10 mA (max) all voltages
ENGLISH DIMENSIONS Lbs./100 pcs. Body Length, in. (with leads) Max. Diameter, in.	0.33 0.74 0.31	0.32 0.52 0.31

DURAKOOL Ball Switches

TYPE	Single-pole	Single-pole
PART NUMBER	20518	20274
Max. Included angle (from 0° horizontal reference)	± 5° 	± 8° 
DESCRIPTION	Plated ball suitable for tip or tilt applications.	High current ball tilt switch, noise dampened.
ELECTRICAL RATINGS		
AC Amps, 60Hz 13.5 VDC	5 mA (max)	1 A (max)
ENGLISH DIMENSIONS Lbs./100 pcs. Body Length, in. (with leads) Max. Diameter, in.	0.31 0.74 0.31	4.0 0.99 0.64

American Electronic Components specializes in the design and manufacture of electronic, electrical, and mechanical components. AEC's products are shipped worldwide for a diverse set of markets which include automotive, consumer electronics, appliance, industrial control, and outdoor power equipment manufacturers. For more information, contact the AEC Sales Department



◀ Hermetic Seals

HERMASEAL Glass-to-Metal Hermetic Seals, Feedthrus & Deep Vacuum Brazing

Relays ▶

Hermetically sealed high power relays 10-150 amps for general and high voltage use.




Electromechanical ▶

Starter solenoids for outdoor power equipment and solenoids for automotive seatbelt retractors.

◀ Switches

Hermetically sealed tilt and tip-over switches for appliance, automotive, security, and safety use.

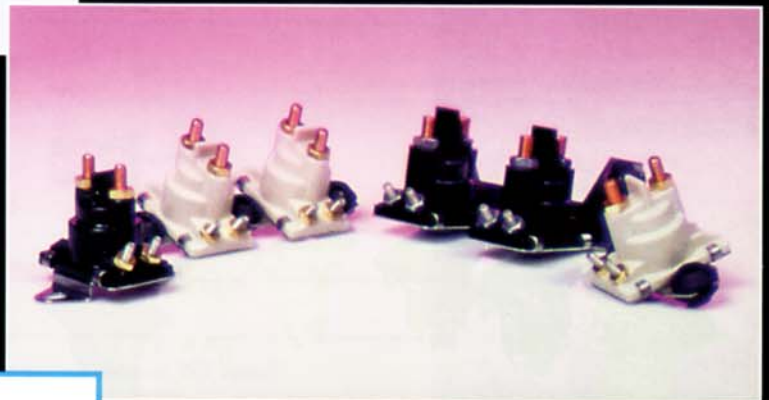

Local Representative:



American
Electronic
Components, Inc.
®

American Electronic Components, Inc.
1101 Lafayette Street
Elkhart, IN 46516
Tel: (574) 264-6099 Ext 501
Tel: (888) 847-6552 Fax: (574) 293-8013

SUNSTAR实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有10多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌IC芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——**中国传感器科技信息网（全球传感器数据库）www.SENSOR-IC.COM** 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到**中国**，共同开拓市场。本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测计量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。 **我公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专门从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。**

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

更多产品请看本公司产品专用销售网站：

中国传感器科技信息网：<http://www.sensor-ic.com/>工控安防网：<http://www.pc-ps.net/>

电子元器件网：<http://www.sunstare.com/>微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

消费电子产品网：<http://www.icasic.com/>军工产品网：<http://www.junpinic.com/>

实业科技产品网：<http://www.sunstars.cn/>传感器销售热线：

电话：0755-83607652 83376489 83376549 83370250 83370251

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail: szss20@163.com QQ: 195847376

技术支持：0755-83394033 13501568376