



## PR 5230 Transmitter in field housing



- Ethernet TCP|IP for PC connection to OPC Server or configuration by Browser
- Modbus TCP for PC and PLC connections
- Webservice via SOAP|UPnP
- serial Interface RS485/422 and RS232
- 3 digital in- and 3 outputs (Relays)
- WtM approval for 10.000 e, class III (In preparation)
- Calibration without weights (Smart Calibration)
- Strain gauge and Sartorius digital scales can be connected
- Display for Weight and Status Information
- ATEX Ex approval for use in Zone 2/22
- Intrinsically safe load cell connection for load cells in Zone 1/21

#### Option cards:

- analogue output 0/4 -20 mA,
- Profibus-DP, Interbus-S, DeviceNet, CC-Link, Profinet and Ethernet |IP,
- Load Cells connection board for up to 4 Load Cells

### Product profile

The Transmitter PR5230 provides an easy and reliable solution for weighing of process hopper scales with strain gauge load cells in process automation applications.

The standard RJ45 connector provides ModBus TCP and also Ethernet TCP|IP for an easy integration into existing PLC and PC networks. Information can be transferred into supervisory systems with the OPC-Server technology.

The IP address can be assigned via the 3 following possibilities:

1. Manual input of the IP address by the user
2. Automatic assignment from network server (DHCP)
3. Auto IP, self-assign by the instrument.

If the IP Address is not known by the user, a small tool is scanning the complete network and displays IP address and name of all Sartorius instruments that are connected to the network. With this function all instruments|scales can be clearly identified.

The tool will be delivered with the Transmitter and can be used without installation. For the configuration of the VNC Technology is used. This function enable the user to start the homepage of the instrument in the Microsoft Internet Explorer and do the configuration online. Additionally to this the tool ConfigureIt Professional is available. With this tool all configurations can be done online or offline and saved on the PC. This makes the administration of different systems very easy and well arranged.

The Transmitter provide a built-in RS232 and RS422/485 serial interface using the very simple and versatile SMA-Standard protocol and the protocol for a remote display. A printer can be connected to printout the configuration but also print a ticket with an incoming event (input) or e.g. every 30 minutes at regular time schedule.

As an option a high-performance 16 bit analogue output is available. Three freely configurable digital In- and Relays Outputs

can control simple process functions, like limits. Additionally to the already included Ethernet TCP|IP and Modbus TCP interface different options cards allows a wide range of field busses: Profibus-DP, Interbus-S, DeviceNet, CC-Link, Profinet and Ethernet |IP.

The housing is a polished stainless steel housing in IP66. All connections are made by compression couplings.

Do you think about Wireless LAN? Use the possibilities of the Ethernet TCP|IP. Remote Service via the Internet, allows support from every point of the world.

The high-quality Sense-amplifier supports 4 and also 6 wire Load Cells. This allows connections over long distances without losing accuracy. Additional security guarantees the fully galvanically isolated sensor input circuit and supply from supply voltage and all in-|output circuits.

**Technical Data**

**Housing**

Housing IP66  
material: stainless steel  
electro polished  
RoHS conform

**Dimensions**

350 × 250 × 150 mm

**Weight**

Net: 1.45 kg

**Display and Status**

LCD, transfective, back lighted  
Weight: 6-digits  
Size: 128 × 64 pixel, graphic  
Information can be configured  
Status LEDs to signal operation  
and error conditions.

**Internal Keys**

In the housing 3 keys for  
Zero, Tare, Test

**Supply Voltage**

230 V<sub>AC</sub> +10/-15%  
24 V<sub>DC</sub> +/-20%

**Power Consumption**

11 W

**Control Outputs**

Quantity: 3  
Relay output, passive,  
Functions: Limits, weight status...  
Voltage: max. 30 V<sub>DC</sub>  
Current: max. 30 mA

**Control Inputs**

Quantity: 3  
opto-isolated input, passive,  
Functions: zero setting, taring...  
Voltage: max. 30 V<sub>DC</sub>  
Current: max. 10 mA

**Remote I/O**

The I/O can be set internally via a  
function and remote via fieldbus or PC

**In-Output**

All I/O circuits fully galvanically isolated  
from sensor input and supply.

**Load cell connection**

All strain gauge load cells;  
6- or 4-wire connection

**Load Cell Supply**

12 V, short-circuit proof.  
External load cell supply possible.

**Minimum Load Impedance**

min. 75 Ω  
e.g. 6 load cells with 600 Ω  
or 4 load cells with 350 Ω

**Measuring Principle**

Measuring amplifier: Delta-Sigma converter  
Measuring time: min 5 ms – max. 1600 ms

**Accuracy**

7.5 nV (appr. 4.8 Mio. div.)  
Usable resolution: 0.2 μV/d

**LC Input Signal**

Measuring signal: 0 bis 36 mV  
(for 100% nominal load)

**W&M Approval (in preparation)**

10,000 e class III acc. to EN 45501;  
according to. OIML R 76,  
min. verification interval: 0.5 μV/e at 160 ms

**Linearity**

< 0.003 %

**Temperature effects**

Zero: TK<sub>0</sub> m < 0.05 μV/K RTI  
Span: TK<sub>span</sub> < +/- 2.5 ppm/K

**Digital filter for load cell**

4th order (low pass), Bessel, aperiodic  
or Butterworth

**Ethernet interface (functions)**

- Ethernet TCP/IP and Modbus TCP
- Definition of an IP address:
  - AutoIP
  - DHCP Server classification
  - manual entering of an IP address
- Automatic detection of signal transmission  
and corresponding change over  
(cross-over or patch cable)
- Webservice via SOAP|UPnP  
(Simple Object Access Protocol)
- Synchronal Modbus UDP

**Serial Interfaces**

RS 422/485 and RS232  
Protocols: Remote Display, SMA, Modbus  
RTU, printer and Sartorius digital scales  
(XBPI – protocol)

**Options:**

**Analogue output PR 5230/06 (C11)**

0/4 ... 20 mA,  
internal resolution 16 bit,  
usable stepwidth: 0.5 μA  
max. load 500 Ω, user configurable

**Fieldbus PR 1721/4x (C2x)**

Profibus-DP, Interbus-S, DeviceNet, CC-Link,  
Profinet and Ethernet | IP

**Load Cell connection Board**

**PR 5230/22 (C31)**

For the internal connection of up to 4 Load  
cells. (instead using a cable junction box)

**Environmental conditions**

**Temperature**

W&M: -10 °C to +40 °C  
Operation: -10 °C to +50 °C  
Storage: -20 °C to +70 °C

**ATEX Approvals PR 5230:**


II 3G Ex nA nC IIC T4  
II 3D Ex tD A22 IP6X T80°C  
SAG 09ATEX004X

II (2)G [Ex ib] IIC

II (2)D [Ex ibD]

KEMA 10 ATEX 0065 X


Housing

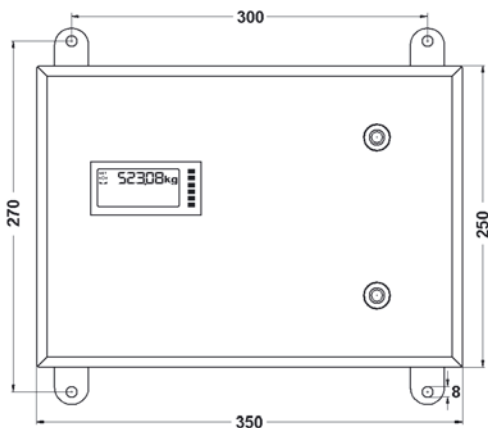


Height of Housing appr. 150 mm

All Dimensions in mm


Display and Status LEDs- configurable

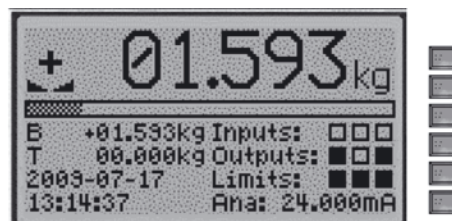

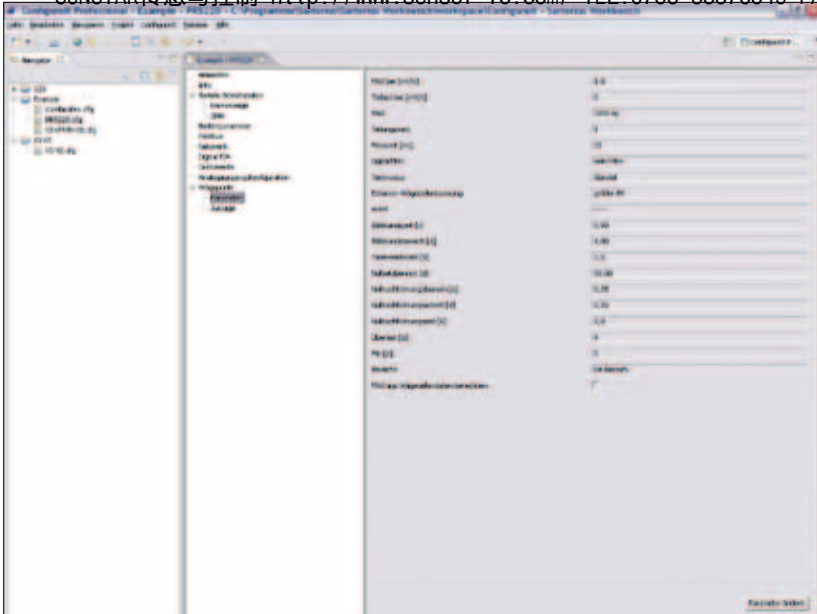


The ConfigureIt Professional program has the following features:

- Searching for an instrument in a network
- Creating and modifying an instrument configuration
- Entering the parameters of an instrument
- Calibration of an instrument using the following methods:
  - with test weights
  - by mV/V
  - using the load cell data ('smart calibration')
- Loading an instrument configuration from an instrument
- Storing an instrument configuration in an instrument or in a file
- Copying instrument configurations (cloning)
- Creating a document (PDF, XLS, etc.) with the instrument configuration

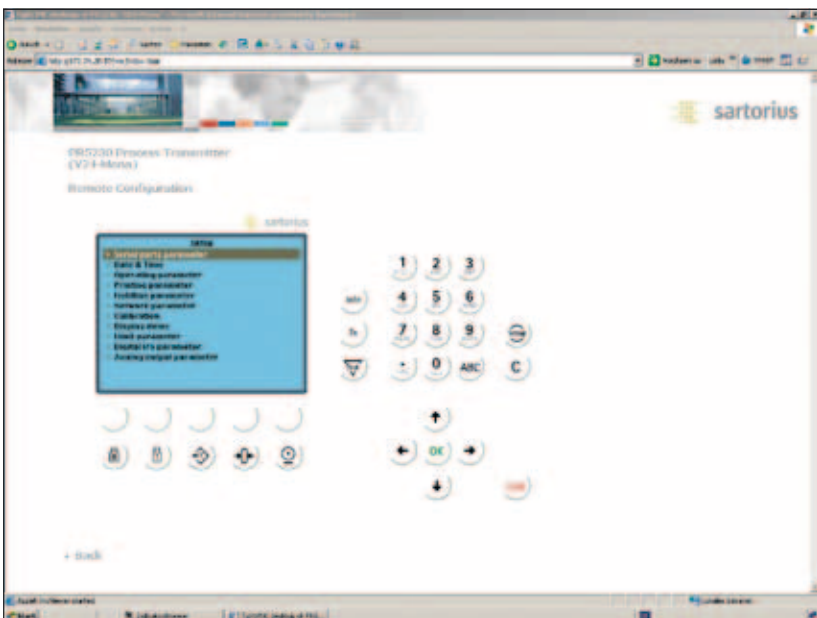

The Functionality VNC allows the following functions:

- Opens the internal Web-Page with the direct entry of the IP address into the standard Web Browser
- Showing and modifying an instrument configuration
- Calibration of an instrument using the following methods:
  - with test weights
  - by mV/V
  - using the load cell data ('smart calibration')
- Displaying and printing the complete configuration
- Readout of the fault memory

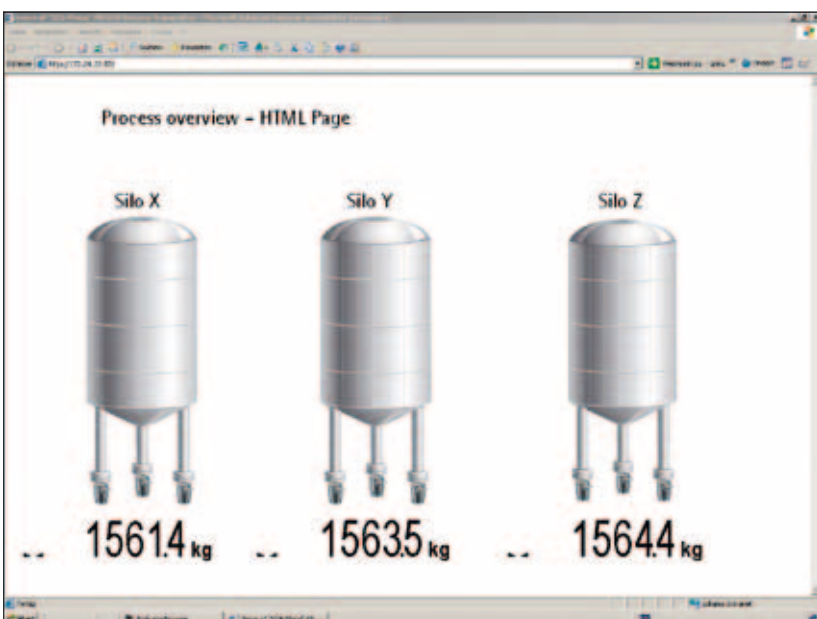

Generate HTML side for Process Overview:

- Weight Indication on the PC Display
- Easy creation of HTML side by standard html programming
- Weight and status can be easily implemented as standard command
- Weight display is "live"

**Order information**

Type	Description	Order number
PR 5230	Transmitter in field housing, IP66, stainless steel, incl. Ethernet TCP IP and Modbus TCP, RS232, RS485/422, 3 Relays Outputs, 3 Digital Opto. Inputs OPC Server License included	9405 152 30000

**Options For delivery the option will be installed**

Power Supply	230 V <sub>ac</sub>	L0
	24 V <sub>dc</sub>	L8
A D Converter	To connect DMS Load Cells in Safe Area	W1
	To connect DMS Load Cells in EX Area ATEX 1/21 (intrinsically safe)	WE1
Ex Approval	ATEX Zone 2/22	Y2
Digital IN OUT	Digital Input Passiv (external 24 V Power Supply needed)	DE1
	Digital Input Activ (internal 12 V supply)	DE2
	Digital Output Relais passiv	DA1
	Digital Output Optocoupler passiv	DA2

**Option Cards**

		SLOT	1	2	3
	Analog Output 0/4-20 mA	C11	x		
	Profibus-DP	C21		x	
	Interbus-S	C22		x	
	DeviceNet	C24		x	
	CC-Link	C25		x	
	Profinet	C26		x	
	Ethernet IP	C27		x	
	Load Cell connection board for up to 4 Load Cells (instead using a cable junction box)	C31			x
Ethernet RJ45	Ethernet female connector RJ45, IP66	M39			
	Ethernet cable with cable glance, 7M, RJ45 plug	M40			

**Accessories Delivery of option card will be separately**

PR 5230/06	Analog Output 0/4-20 mA	9405 352 30061
PR 5230/22	Load Cell connection board for up to 4 Load Cells (instead using a cable junction box)	9405 352 30221
PR 5230/30	Ethernet female connector RJ45, IP66	9405 352 30301
PR 5230/31	Ethernet cable with cable glance, 7M, RJ45 plug	9405 352 30311
PR 1721/41	Profibus-DP	9405 317 21411
PR 1721/42	Interbus-S	9405 317 21421
PR 1721/44	DeviceNet	9405 317 21441
PR 1721/45	CC-Link	9405 317 21451
PR 1721/46	Profinet	9405 317 21461
PR 1721/47	Ethernet IP	9405 317 21471

The documentation and tools were be delivered on a CD.

(Tools included: Indicator Browser, ConfigureIt Professional, OPC Server, VNC Viewer, Modbus TCP examples)

Paper version of the manuals can be ordered on request.

Specifications subject to change without notice.  
Printed in Germany.  
n/sart - C  
Publication No.: HPR2012-e10101  
Order No.: 9498 752 30001  
Version 08.2010

Sartorius Mechatronics T&H GmbH  
Meiendorfer Strasse 205  
22145 Hamburg, Germany  
Phone +49.40.67960.303  
Fax +49.40.67960.383  
info.mechatronics@sartorius.com  
www.sartorius-mechatronics.com