


Ferrite Cores

High Flux Density, High Permeability Material

DN50 Material

C, EP, P, EPC, EEM, PQ, RM, ER, EE Series

It has become an important issue to support global method of ISDN interfaces associated with the widespread use of ISDN networks worldwide. TDK DN50 ferrite material, a high μ and high B with $\mu_i=5500$ and $B_s \geq 500\text{mT}$, has been developed to provide stable magnetic characteristics to the global method(echo canceler method) of the ultra-small gap specification for superposition direct current. Beside its high μ and high B characteristics, its core loss value at high B level is controlled to provide optimal use for back light transformers driven at high B level of ultra-small gap specifications.

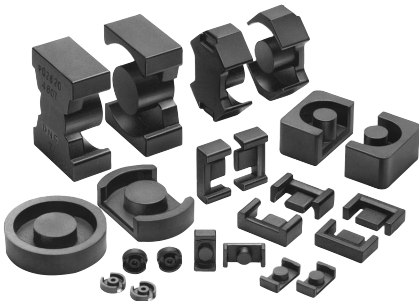


MATERIAL CHARACTERISTICS

Material	DN50		
Initial permeability	μ_i		5500±20%
Relative loss factor[10kHz]	$\tan\delta/\mu_i$	$\times 10^{-6}$	≤ 15
Power loss [100kHz, 200mT]	Pcv	kW/m ³	[25°C] 550
			[40°C] 450
			[100°C] 1000
Saturation magnetic flux density	Bs	mT	[25°C] 550
			[100°C] 380
Remanent flux density	Br	mT	[25°C] 95
			[100°C] 55
Coercive force [1194A/m]	Hc	A/m	[25°C] 7
			[100°C] 5.8
Disaccommodation factor [1 to 10min, 10kHz]	Df	$\times 10^{-6}$	≤ 10
Curie temperature	Tc	°C	≥ 210


STANDARD SHAPES

C CORE: C23/11, C23/18
EP CORE: EP17, EP20
P CORE: P4.6/3.1, P5.8/3.3, P7/4
EPC CORE: EPC10, EPC13
EEM CORE: EEM8/8, EEM10/10, EEM12.7/13.7, EEM13/13
PQ CORE: PQ26/20, PQ26/25
RM CORE: RM8, RM10
ER CORE: ER9.5/5, ER11/3.9, ER11/5, ER14.5/6
EE CORE: EE5, EE8.9/9

INITIAL PERMEABILITY vs. TEMPERATURE CHARACTERISTICS

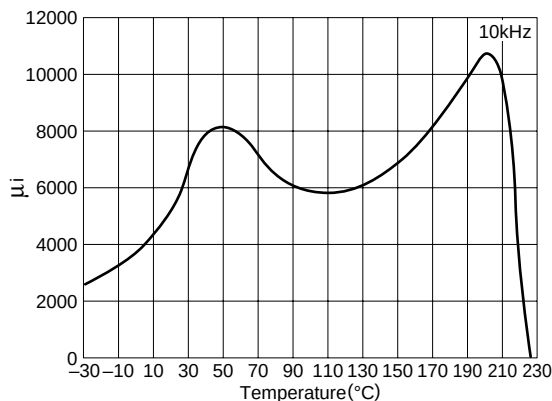

CORE LOSS vs. TEMPERATURE CHARACTERISTICS

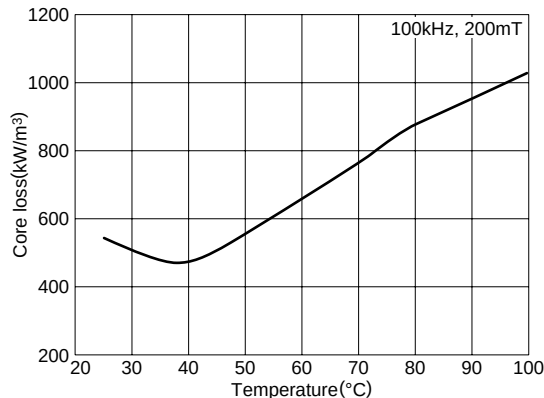

CHARACTERISTICS FOR INTERFACE C CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50C23/11Z-52	6830±25%		
DN50C23/11A250-52	250±3%	BC23/11-5110NP	—
DN50C23/11A400-52	400±3%		
DN50C23/18Z-52	5890±25%		
DN50C23/18A250-52	250±3%	BC23/18-5110NP	—
DN50C23/18A400-52	400±3%		

• Measuring conditions:1kHz, 0.5mT, $\varnothing 0.35\text{mm}$, 100ts.

Ferrite Cores

C, EP, P, EPC, EEM, PQ, RM, ER, EE Series

High Flux Density, High Permeability Material
DN50 Material

CHARACTERISTICS

FOR INTERFACE

PQ CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50PQ26/20Z-12	10500±25%	BPQ26/20-1112CP	FPQ26/20-A
DN50PQ26/20A315-22	315±5%		
DN50PQ26/20A630-22	630±10%		
DN50PQ26/25Z-12	9250±25%	BPQ26/25-1112CP	FPQ26/25-A
DN50PQ26/25A315-22	315±5%		
DN50PQ26/25A630-22	630±10%		

- Measuring conditions:1kHz, 0.5mT, Ø0.35mm, 100ts.

EP CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50EP17-Z	3300min.	BEP-17-318D	FEP-17-C
DN50EP20-Z	5900min.	BEP-20-3110D	FEP-20-C

- Measuring conditions
EP17:1kHz, 0.5mT, Ø0.2mm, 100ts./EP20:1kHz, 0.5mT, Ø0.35mm, 100ts.

RM CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50RM8Z-12	8860±25%	BRM-8-718CP	FRM-8-A
DN50RM8A400-22	400±3%		
DN50RM8A630-22	630±3%		
DN50RM10Z-22	12200±25%	BRM-10-7112SD	FRM-10-A
DN50RM10A400-22	400±3%		
DN50RM10A630-12	630±3%		

- Measuring conditions:1kHz, 0.5mT, Ø0.4mm, 100ts.

FOR BACK LIGHT TRANSFORMER

P CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50P4.6/3.1Z-12S	670±30%	—	—
DN50P5.8/3.3Z-52S	900±25%	BP5.8/3.3-612	—
DN50P7/4Z-52S	1230±25%	BP7/4-612	—

- Measuring conditions
P4.6/3.1:1kHz, 0.5mT, Ø0.05mm, 100ts.
P5.3/3.3:1kHz, 0.5mT, Ø0.08mm, 100ts.
P7/4:1kHz, 0.5mT, Ø0.1mm, 100ts.

ER CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50ER9.5/5-Z	900min.	BER9.5/5-118GA	FER9.5/5-A
DN50ER9.5/5A63	63±5%		
DN50ER9.5/5A100	100±7%		
DN50ER11/3.9-Z	1400min.	BER11/3.9-1110G	FER11/3.9-A
DN50ER11/3.9A63	63±5%		
DN50ER11/3.9A100	100±7%		
DN50ER11/5-Z	1300min.	BER11/5-1110GA	FER11/5-A
DN50ER11/5A63	63±5%		
DN50ER11/5A100	100±7%		
DN50ER14.5/6-Z	1700min.	BER14.5/6-1110GA	FER14.5/6-A
DN50ER14.5/6A100	100±5%		
DN50ER14.5/6A160	160±7%		

- Measuring conditions
ER9.5/5, ER11/3.9, ER11/5:1kHz, 0.5mT, Ø0.1mm, 100ts.
ER14.5/6:1kHz, 0.5mT, Ø0.18mm, 100ts.

Ferrite Cores

C, EP, P, EPC, EEM, PQ, RM, ER, EE Series

High Flux Density, High Permeability Material
DN50 Material

FOR BACK LIGHT TRANSFORMER

EPC CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50EPC10-Z	1450±25%	BEPC-10-118GA	FEPC-10-A
DN50EPC10A40	40±7%		
DN50EPC10A63	63±10%		
DN50EPC13-Z	1400±25%	BEPC-13-1110GA	FEPC-13-A
DN50EPC13A40	40±4%		
DN50EPC13A63	63±5%		

- Measuring conditions
EPC10:1kHz, 0.5mT, Ø0.1mm, 100ts./EPC13:1kHz, 0.5mT, Ø0.2mm, 100ts.

EEM CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50EEM12.7/13.7-Z	1300±25%	BEM12.7/13.7-118GA	FEM12.7/13.7-A
DN50EEM12.7/13.7A40	40±5%		
DN50EEM12.7/13.7A63	63±7%		
DN50EEM8/8-Z	320min.	BEM-8/8-018G	—
DN50EEM8/8A25	25±10%		
DN50EEM8/8A40	40±15%		
DN50EEM10/10-Z	400min.	BEM-10/10-0110G	—
DN50EEM10/10A25	25±7%		
DN50EEM10/10A40	40±10%		
DN50EEM13/13-Z	550min.	BEM-13/13-0110G	—
DN50EEM13/13A40	40±8%		
DN50EEM13/13A63	63±12%		

- Measuring conditions:1kHz, 0.5mT, Ø0.1mm, 100ts.

EE CORE

Part No.	AL-value(nH/N ²)	Bobbin	Flange
DN50EE5-Z	300min.	BE-5-916F	FE-5-A
DN50EE5A25	25±15%		
DN50EE8.9/8Z	690±25%	BE-8.9/8-118G	—
DN50EE8.9/8A25	25±8%		
DN50EE8.9/8A40	40±13%		

- Measuring conditions
EE5:1kHz, 0.5mT, Ø0.1mm, 100ts.
EE8.9/8:1kHz, 0.5mT, Ø0.2mm, 100ts.

Ferrite Cores

C, EP, P, EPC, EEM, PQ, RM, ER, EE Series

High Flux Density, High Permeability Material
DN50 Material

MOUNTING DIMENSIONS FOR ISDN INTERFACE

Part No.	Mounting dimensions(mm)			Number of terminals	Mounting type
	Depth	Width	Height		
DN50C23/11	23.3	26	11.2	10	Lead-through
DN50C23/18	23.3	26	18.2	10	
DN50PQ26/20	26.5	29.3	25	12	
DN50PQ26/25	26.5	29.3	29.6	12	
DN50EP17	13.55	16.8	5	8	
DN50EP20	11.7	14	3.5	10	
DN50RM8	20	20	16.5	8	
DN50RM10	24.7	24.7	18.7	12	

FOR BACK LIGHT TRANSFORMERS

Part No.	Mounting dimensions(mm)			Number of terminals	Mounting type
	Depth	Width	Height		
DN50P4.6/3.5	4.6	4.6	3.1	—	—
DN50P5.8/3.3	5.8	5.8	3.3	—	
DN50P7/4	7.35	7.35	4.2	—	
DN50ER9.5/5	9.9	11.7	5.9	8	SMD
DN50ER11/3.9	11	12.6	4.7	10	
DN50ER11/5	11.5	12.3	6.4	10	
DN50ER14.5/6	15.1	16.2	7.3	10	
DN50EPC10	11	11.7	5.2	8	
DN50EPC13	14.2	20.6	7.8	10	
DN50EEM12.7/13.7	13.55	16.8	5	8	
DN50EEM8.8	9.2	11.2	3.5	8	
DN50EEM10/10	11.7	14	3.5	10	
DN50EEM13/13	14.2	16.6	3.5	10	
DN50EE5	5.7	7.8	4.75	6	
DN50EE8.9/8	9.3	11.3	4.8	8	

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382