

Ferrite Cores

For High Power

High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

FEATURES

- Large size ferrite cores developed for reactors and transformers used in high power units.
- Please contact us for machinability of non-standard special forms.


MATERIAL CHARACTERISTICS (Typical)

Material			PE22	PC40
Initial permeability	μ_i	[23°C]	1800	2300
Curie temperature	T_c	°C	>200	>200
Saturation magnetic flux density	B_s	[23°C] [100°C]	510 410	500 380
Remanent flux density	B_r	[23°C]	170	140
Coercive force	H_c	[23°C]	16	15
Core loss	25kHz, 200mT 100kHz, 200mT	P_{cv} [100°C]	80 520	70 420
Electrical resistivity	ρ	$\Omega \cdot m$	3	6.5
Approximate density	d_{app}	kg/m ³	4.8×10^3	4.8×10^3
Thermal expansion coefficient	α	1/K	12×10^{-6}	12×10^{-6}
Thermal conductivity	κ	W/mK	5	5
Specific heat	C_p	J/kg · K	600	600
Bending strength	δb_3	N/m ²	9×10^7	9×10^7
Young's modulus	E	N/m ²	1.2×10^{11}	1.2×10^{11}
Magnetostriction	λ_s		-0.6×10^{-6}	-0.6×10^{-6}




• 1(mT)=10(G), 1(A/m)=0.012566(Oe)

CORE LOSS vs. FREQUENCY CHARACTERISTICS



MATERIAL:PE22

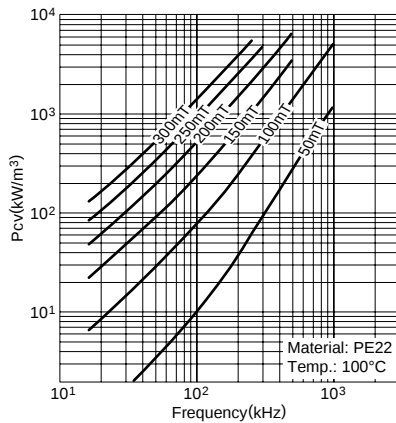

MATERIAL:PC40

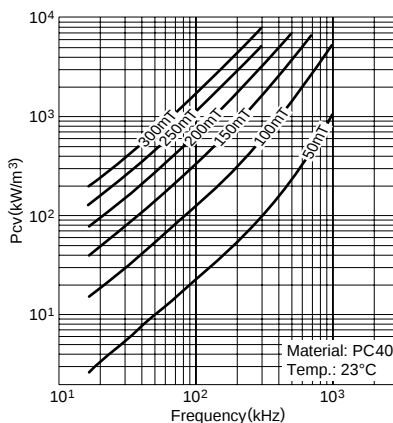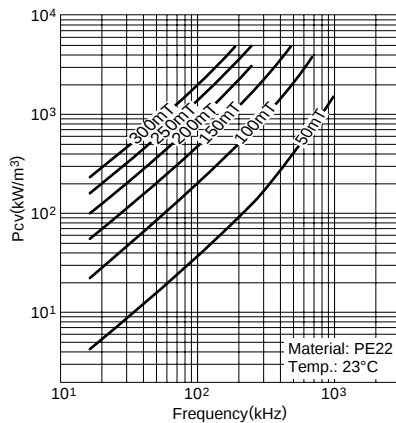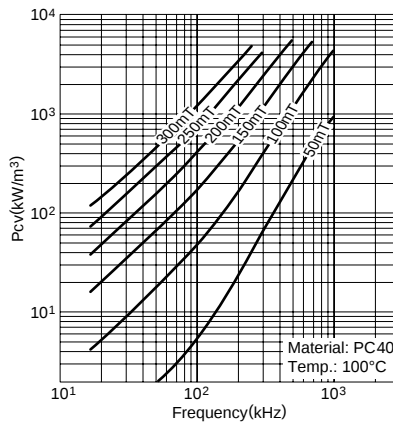

CORE LOSS vs. TEMPERATURE CHARACTERISTICS

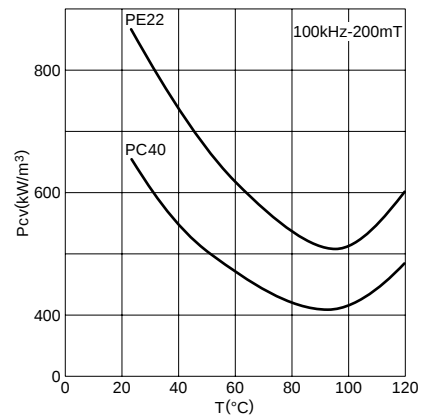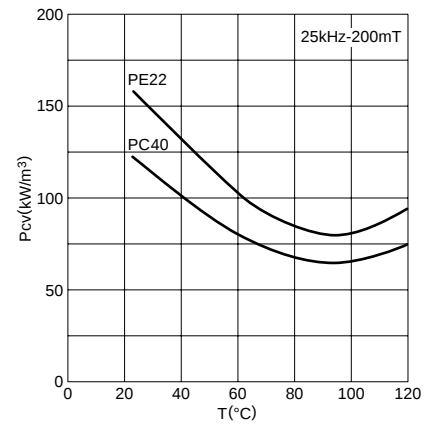


Ferrite Cores

For High Power


High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series


SATURATION MAGNETIC FLUX DENSITY vs. TEMPERATURE CHARACTERISTICS

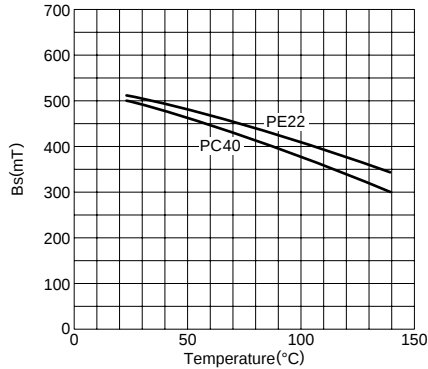




AMPLITUDE PERMEABILITY vs. SATURATION MAGNETIC FLUX DENSITY CHARACTERISTICS

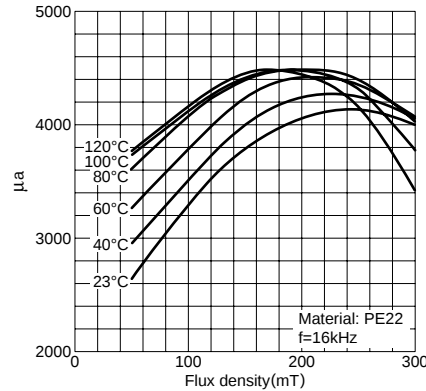

MAGNETIC PERMEABILITY vs. FREQUENCY CHARACTERISTICS

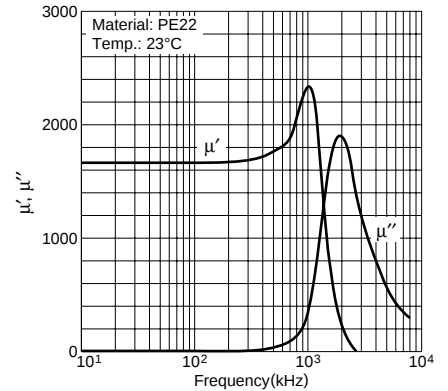

INITIAL MAGNETIC PERMEABILITY vs. TEMPERATURE CHARACTERISTICS

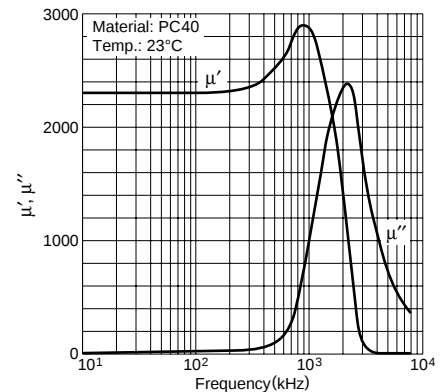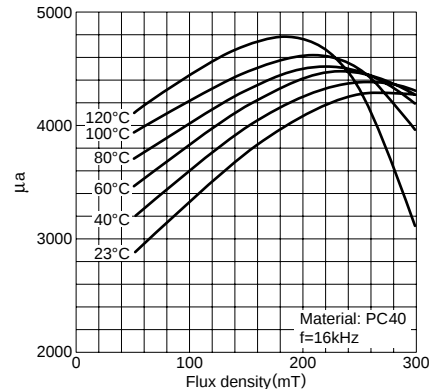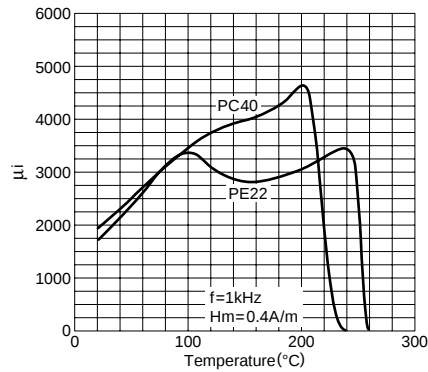

DIMENSIONAL RESONANCE

Dimensional resonance is a phenomenon which increases loss and decreases magnetic permeability by electromagnetic standing waves when the magnetic field of the core frequency is applied.

The phenomenon appears when the maximum dimension of the cross section of the core perpendicular to the magnetic field is the integral multiple of about half of the electromagnetic wavelength λ.

$$\lambda = \frac{C}{f \times \sqrt{\mu r \times \epsilon r}}$$

C: Electromagnetic wave speed in a vacuum (3.0×10⁸m/s)

μr: Relative magnetic permeability

εr: Relative permittivity


f: Frequency of the applied magnetic field (electromagnetic wave)

As μe decreases by inserting into the gap, using the same core enables high frequency wave usage as indicated by the formula above.

As dimensional resonance quickly decreases magnetic permeability, design the actual frequency to avoid dimensional resonance. In the case of possible dimensional resonance, it can be protected

against by dividing the core in the magnetic circuit direction and bonding them.

RESONANCE DIMENSION vs. TEMPERATURE CHARACTERISTICS

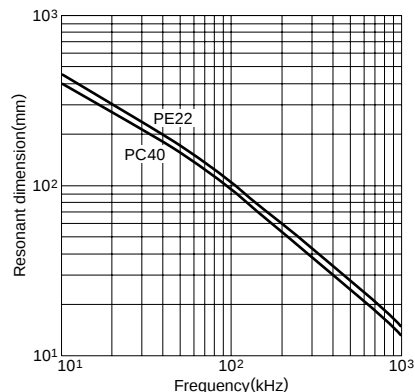

Ferrite Cores


For High Power

High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

T CORE

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS

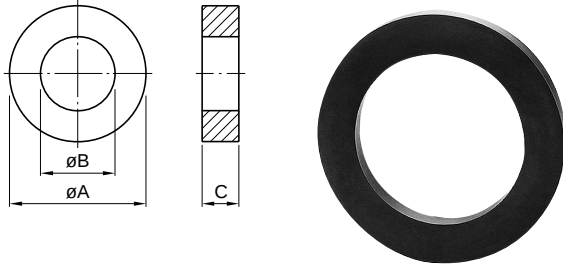

PRODUCT IDENTIFICATION

$\frac{PE22}{(1)} \quad \frac{T}{(2)} \quad \frac{51}{(3)} \times \frac{13}{(4)} \times \frac{31}{(5)}$

- (1) Material name
 (2) Shape
 (3) Dimension A
 (4) Thickness
 (5) Dimension B

Part No.	AL*(nH/N ²) ±25%	Dimensions (mm)			Core factor					Weight (g)
		A	B	C	C ₁ (mm ⁻¹)	C ₂ ×10 ⁻² (mm ⁻³)	Ae(mm ²)	Le(mm)	Ve(mm ³)	
PE22 T51X13X31	2330	51±1	31±0.6	13±0.5	0.97084	0.76235	127	124	15740	80
PC40 T51X13X31	2980									
PE22 T62.5X13.5X39	2290	62.5±1.2	39±0.8	13.5±0.5	0.98689	0.63377	156	154	23930	121
PC40 T62.5X13.5X39	2930									
PE22 T73X20X45	3480	73±1.5	45±0.9	20±0.5	0.64936	0.23647	275	178	48970	249
PC40 T73X20X45	4450									
PE22 T75X20X15	11590	75±1.5	15±0.3	20±0.5	0.19520	0.04019	486	95	46040	407
PC40 T75X20X15	14810									
PE22 T80X20X50	3380	80±1.6	50±1	20±0.5	0.66842	0.22694	295	197	57990	294
PC40 T80X20X50	4320									
PE22 T96X20X70	2270	96±1.9	70±1.4	20±0.5	0.99464	0.38574	258	256	66130	325
PC40 T96X20X70	2910									
PE22 T124X20X100	1550	124±2.5	100±2	20±0.5	1.46045	0.61087	239	349	83480	405
PC40 T124X20X100	1980									
PE22 T137X20X112	1450	137±3	112±2.2	20±0.5	1.55924	0.62581	249	388	96800	469
PC40 T137X20X112	1850									
PE22 T150X20X70	5490	150±3	70±1.4	20±0.5	0.41221	0.05407	762	314	239580	1330
PC40 T150X20X70	7010									
PE22 T202X20X70	7630	202±4	70±1.5	20±0.5	0.29644	0.02464	1203	357	429080	2710
PC40 T202X20X70	9750									
PE22 T310X30X210	4210	310±6.2	210±4.2	30±0.5	0.53776	0.03631	1481	797	1179800	5880
PC40 T310X30X210	5370									

* Measuring condition: T=23°C, f=1kHz, Hm=0.4A/m

Ferrite Cores


For High Power

High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

UU CORE

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS



PRODUCT IDENTIFICATION

PE22 UU 79 × 129 × 31.5
(1) (2) (3) (4) (5)

- (1) Material name
(2) Shape
(3) Dimension A
(4) Dimension B×2
(5) Thickness

Part No.	AL*1(nH/N ²) ±25%	Dimensions (mm)								
		A	B×2	C	E	F×2	H	R1	R2	E×2F(mm ²)
PE22 UU79X129X31.5	4790	79±2.5	129±2.5	31.5±1	34min.	85±1.5	22±1	5	22	2980
PC40 UU79X129X31.5	6030									
PE22 UU100X151X30	5540	100±3	151±2.5	30±1	39min.	90±1.5	30±1.5	5	30	3600
PC40 UU100X151X30	6990									
PE22 UU100X160X20	3460	100±3	160±2.5	20±1	39min.	100±1.5	30±1.5	5	35	4000
PC40 UU100X160X20	4360									
PE22 UU101X115X25.4	4480	101±3	115±2.5	25.4±1	50min.	64±1.5	25±1	5	25	3260
PC40 UU101X115X25.4	5640									
PE22 UU120X160X20	3140	120±3	160±2.5	20±1	59min.	100±1.5	30±1.5	5	35	6000
PC40 UU120X160X20	3960									
PE22 UU120X310X20*2	—	120±3	310±2.5	20±1	59min.	250±1.5	30±1.5	5	35	15000
PC40 UU120X310X20*2	—									

*1 Measuring condition: T=23°C, f=1kHz, Hm=0.4A/m

*2 Stacked 2U cores.

Part No.	Core factor					Weight(g)
	C1(mm ⁻¹)	C2×10 ⁻² (mm ⁻³)	Ae(mm ²)	Le(mm)	Ve(mm ³)	
PE22 UU79X129X31.5	0.44605	0.06437	693	309	214220	1080
PC40 UU79X129X31.5						
PE22 UU100X151X30	0.38801	0.04241	915	355	324860	1630
PC40 UU100X151X30						
PE22 UU100X160X20	0.62375	0.10396	600	374	224550	1130
PC40 UU100X160X20						
PE22 UU101X115X25.4	0.47757	0.07373	648	309	200350	1000
PC40 UU101X115X25.4						
PE22 UU120X160X20	0.69041	0.11507	600	414	248550	1240
PC40 UU120X160X20						
PE22 UU120X310X20	1.19041	0.19840	600	714	428550	2110
PC40 UU120X310X20						

Ferrite Cores

For High Power


High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series


UU CORE BAND

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS

A-type band

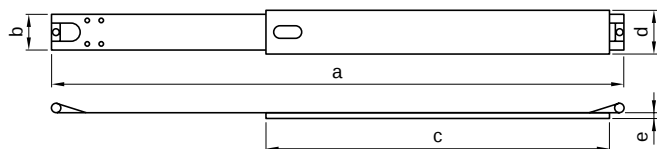


B-type band




•A-type is the band with a board and B-type is the band without a board.

Part No.	Dimensions (mm)				
	a	b	c	d	e
FHH 79X129A	370	27	180	31.5	3
FHH 79X129B	370	27	—	—	—
FHH 100X151A	435	27	190	28	3
FHH 100X151B	435	30	—	—	—
FHH 100X160A	482	18	206	20	3
FHH 100X160B	482	18	—	—	—
FHH 101X115A	378	23.4	140	25.4	3
FHH 101X115B	378	23.4	—	—	—
FHH 120X160A	482	18	206	20	3
FHH 120X160B	482	18	—	—	—
FHH 120X310A	782	18	356	20	3
FHH 120X310B	782	18	—	—	—

CORE CHARACTERISTIC EXAMPLE

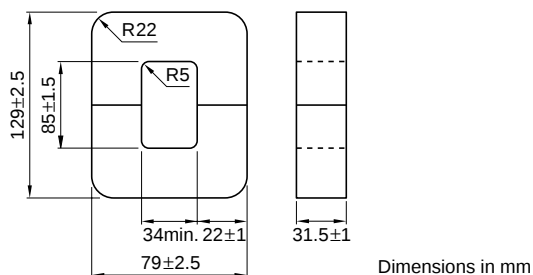

PE22UU79X129X31.5

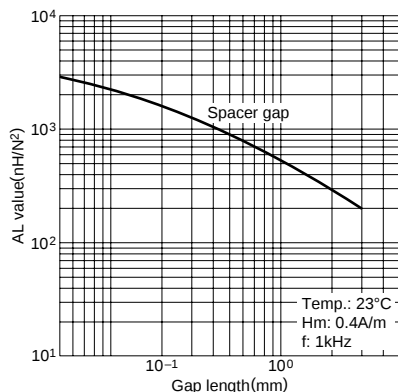

Parameter	Unit	
Core constant	C ₁	mm ⁻¹ 0.44605
	C ₂ ×10 ⁻²	mm ⁻³ 0.06437
Effective magnetic pass length	l _e	mm 309
Effective cross-sectional area	A _e	mm ² 693
Effective core volume	V _e	mm ³ 214220
Cross-sectional center leg area	A _c	mm ² 693
Minimum cross-sectional center leg area*	A _{min.}	mm ² 693LB
Cross-sectional winding area of core	A _{cw}	mm ² 2980
Weight	W	g 1080

* The symbol after A_{min.}:Value shows the position of the minimum cross section. C is for mid-leg, L for external leg and B for back.

Ferrite Cores


For High Power

High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

EC CORE

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS


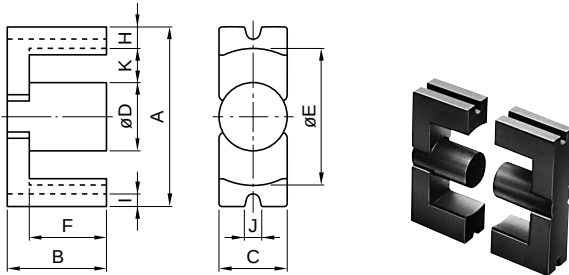


PRODUCT IDENTIFICATION

PE22	EU	90	- Z
(1)	(2)	(3)	(4)

- (1) Material name
 (2) Shape
 (3) Dimension A
 (4) Gap dimension(Z=0)

EC CORE BOBBIN

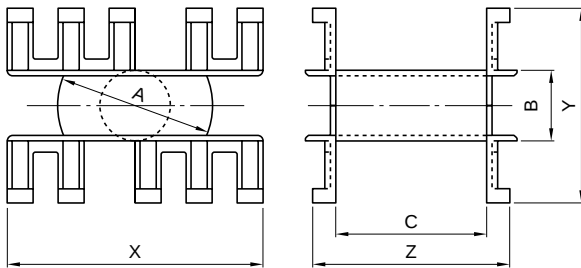

Part No.	AL*(nH/N ²) ±25%	Dimensions (mm)										
		A	B×2	C	D	E	F×2	H	I	J	K	K×2F(mm ²)
PE22 EC70-Z	3950	70±1.7	69±1	16.4±0.5	16.4±0.5	43.3min.	45.5±1	12.75±0.4	5.2±0.2	4.75±0.3	14.1	639
PC40 EC70-Z	4890											
PE22 EC90-Z	6340	90±1.8	90±1.3	30±1	30±1	68.5min.	71±1	10±0.6	5.5±0.2	6±0.3	20	1420
PC40 EC90-Z	7940											
PE22 EC120-Z	6450	120±2	101±1.3	30±1	30±1	93.3min.	71±1	12.5±0.7	5.5±0.2	6±0.3	32.5	2307
PC40 EC120-Z	8090											

* Measuring condition: T=23°C, f=1kHz, Hm=0.4A/m

Part No.	Core factor					Weight (g)
	C ₁ (mm ⁻¹)	C ₂ ×10 ⁻² (mm ⁻³)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	
PE22 EC70-Z	0.5260563	0.18635	282	149	41920	250
PC40 EC70-Z						
PE22 EC90-Z	0.3561571	0.05690	626	223	139560	635
PC40 EC90-Z						
PE22 EC120-Z	0.3448813	0.04464	773	266	205810	986
PC40 EC120-Z						

EC CORE BOBBIN

Part No.	Dimensions (mm)							Cross-sectional winding area Aw(mm ²)	Average winding length lw(mm)	Weight (g)	Material
	øA	øB	C	X	Y	Z	t*				
BEC-70-5116	42.7	19.5	41.45	70	56.3	57.8	1.13	471.4	98	19	PBT
BEC-90-0112	67.6	35.4	65.3	80	77	89.8	1.9	1047	162	8.2	PBT

* Bobbin minimum thickness

• Soldering condition: 350°C max./2s

Ferrite Cores


For High Power

High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

EIC CORE

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS

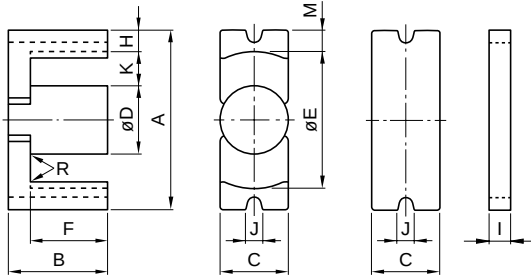

PRODUCT IDENTIFICATION

PE22 EIC 90 Z
(1) (2) (3) (4)

- (1) Material name
(2) Shape
(3) Dimension A
(4) Gap dimension(Z=0)


Part No.	AL*(nH/N ²) ±25%	Dimensions (mm)											
		A	B+I	C	D	E	F	H	I	M	J	R	K
PE22 EIC90-Z	8680	90±1.8	55.05±1.3	30±1	30±1	68.5min.	35.5±0.5	10±0.6	10±0.3	5.5±0.2	5.5±0.3	1max.	20
PC40 EIC90-Z	10770												
PE22 EIC120-Z	9040	120±2	65.5±1.3	30±1	30±1	93.3min.	35.5±0.5	12.5±0.7	15±0.6	5.5±0.3	6±0.3	1.5max.	32.5
PC40 EIC120-Z	11270												

* Measuring condition: T=23°C, f=1kHz, Hm=0.4A/m

Part No.	Core factor					Weight (g)
	C ₁ (mm ⁻¹)	C ₂ ×10 ⁻² (mm ⁻³)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	
PE22 EIC90-Z	0.2255	0.0336	671	151	101599	469
PC40 EIC90-Z						
PE22 EIC120-Z	0.2321	0.0258	792	208	187081	747
PC40 EIC120-Z						

EI CORE


CORE SHAPES AND DIMENSIONS/CHARACTERISTICS

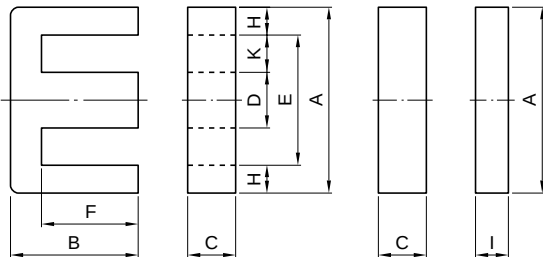

PRODUCT IDENTIFICATION

PE22 EI 70 Z
(1) (2) (3) (4)

- (1) Material name
(2) Shape
(3) Dimension A
(4) Gap dimension(Z=0)



Part No.	AL*(nH/N ²) ±25%	Dimensions (mm)									
		A	B+I	C	D	E	F	H	I	K	K×F(mm ²)
PE22 EI70-Z 5820											
PC40 EI70-Z 7200		70±1.5	56±1	19.5±0.5	19.5±0.5	48.5min.	35.5±0.5	10±0.5	10.5±0.5	15.3	543

* Measuring condition: T=23°C, f=1kHz, Hm=0.4A/m

Part No.	Core factor					Weight (g)
	C ₁ (mm ⁻¹)	C ₂ ×10 ⁻² (mm ⁻³)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	
PE22 EI70-Z	0.35211	0.09032	390	137	53520	266
PC40 EI70-Z						

Ferrite Cores


For High Power

High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

PQ CORE


CORE SHAPES AND DIMENSIONS/CHARACTERISTICS

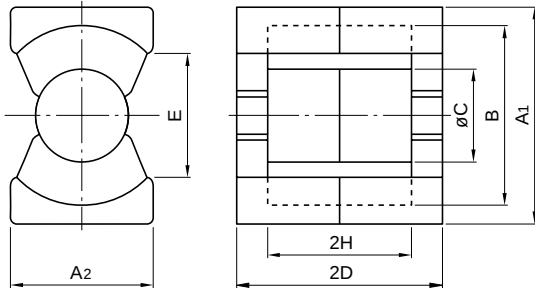

PRODUCT IDENTIFICATION

PE22 PQ 59 - Z
 (1) (2) (3) (4)
 (1) Material name
 (2) Shape
 (3) Dimension A₁
 (4) Gap dimension(Z=0)

PQ CORE BOBBIN

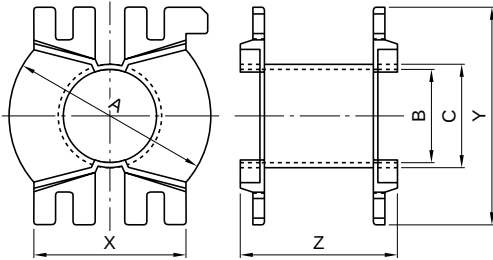

Part No.	AL*(nH/N ²) ±25%	Dimensions (mm)						
		A ₁	A ₂	B	øC	2D	E _{min}	2H
PE22 PQ59	10540	59±0.8	42±0.8	51.5min.	24±0.5	26.8±0.4	42min.	14.2±0.4
PC40 PQ59	12810							
PE22 PQ79	7940	78.5±1.5	42±0.8	69min.	25.5±0.5	39.4±0.6	60min.	25.8±1
PC40 PQ79	9790							
PE22 PQ100	14570	107±2	70±1.5	93.7min.	41±1	87±1.5	72.5min.	56±1.5
PC40 PQ100	18210							

* Measuring condition: T=23°C, f=1kHz, H_m=0.4A/m

Part No.	Core factor					Weight(g)
	C ₁ (mm ⁻¹)	C ₂ ×10 ⁻² (mm ⁻³)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	
PE22 PQ59	0.17520	0.038292	458	80	36700	185
PC40 PQ59						
PE22 PQ79	0.24730	0.051530	480	119	56900	304
PC40 PQ79						
PE22 PQ100	0.14260	0.009989	1428	204	290600	1560
PC40 PQ100						

PQ CORE BOBBIN

Part No.	Dimensions (mm)					Cross-sectional winding area A _w (mm ²)	Average winding length l _w (mm)	Material
	øA	øB	X	Y	Z			
BPQ59-0112	50.6	25.1	40	58	20.2	115	124	PBT
BPQ79-0112	68	26.7	57.5	78	32	377	154	PBT
BPQ100-0112	92.5	42.7	69.5	100	71.8	1140	218	PBT

• Soldering condition: 350°C max./2s

Ferrite Cores


For High Power

High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

EE CORE

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS

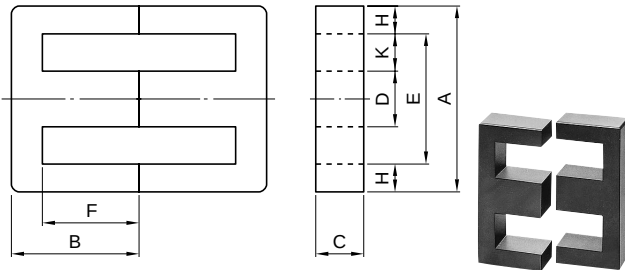


PRODUCT IDENTIFICATION

PE22 EE 320 × 250 × 20 - Z
(1) (2) (3) (4) (5) (6)

- (1) Material name
- (2) Shape
- (3) Dimension A
- (4) Dimension Bx2
- (5) Thickness
- (6) Gap dimension(Z=0)

EE CORE BOBBIN

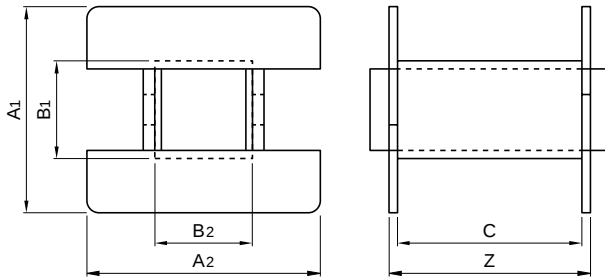

Part No.	AL*1(nH/N ²)	Dimensions (mm)								
		±25%	A	B×2	C	D	E	F×2	H	K
PE22 EE70-Z	3390		70±1.5	91±1	19.5±0.5	19.5±0.5	48.5min.	71±1	10±0.5	15.3
PC40 EE70-Z	4910									
PE22 EE80X76-Z	4590		80±1.5	76±1	20±0.5	20±0.5	58.5min.	55±0.8	10±0.5	20
PC40 EE80X76-Z	5720									
PE22 EE90-Z	5960		90±2	56.4±1	16.5±0.5	25±1	63min.	30.4±1	12.5±0.5	20
PC40 EE90-Z	7380									
PE22 EE320X250X20-Z*2	—		320±5	250±1	20±1	100±2.4	217min.	150±3	50±1	60
PC40 EE320X250X20-Z*2	—									

*1 Measuring condition: T=23°C, f=1kHz, Hm=0.4A/m

*2 EE320x250x20-Z is a bonded product.

Part No.	Core factor					Weight (g)
	C ₁ (mm ⁻¹)	C ₂ ×10 ⁻² (mm ⁻³)	Ae(mm ²)	Le(mm)	Ve(mm ³)	
PE22 EE70-Z	0.52779	0.13669	386	204	78690	394
PC40 EE70-Z						
PE22 EE80X76-Z	0.44878	0.11058	406	182	73910	372
PC40 EE80X76-Z						
PE22 EE90-Z	0.33583	0.08009	419	141	59050	306
PC40 EE90-Z						
PE22 EE320X250X20-Z	0.28854	0.01443	2000	577	1154160	6150
PC40 EE320X250X20-Z						

EE CORE BOBBIN

Part No.	Dimensions (mm)						Cross-sectional winding area Aw(mm ²)	Average winding length lw(mm)	Weight (g)	Material
	A ₁	A ₂	B ₁	B ₂	C	Z				
BE-80-S	56.56	60.92	25.52	25.52	48.16	52.3	747	168	32	PBT
BE-80-W	56.56	81.42	25.52	46.02	48.16	52.3	747	209	41	PBT


Ferrite Cores

For High Power
High Power Cores

T, UU, EC, EIC, PQ, EE, EI, DT, SP Series

DT CORE

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS

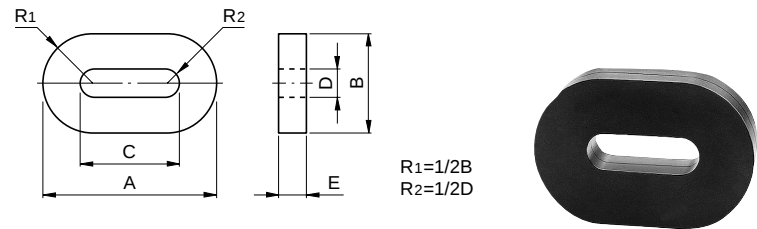


Part No.	AL*(nH/N ²) ±25%	Dimensions (mm)				
		A	B	C	D	E
PE22 DT138X20X58	6680	138±2.8	104±2.1	58±1.5	24.7±0.5	20±0.4
PC40 DT138X20X58	8540					
PE22 DT200X20X100	5630	200±5	130±3	102±2.5	31.5±1	20±0.4
PC40 DT200X20X100	7200					

* Measuring condition: T=23°C, f=1kHz, Hm=0.4A/m

Part No.	Core factor					Weight (g)
	C ₁ (mm ⁻¹)	C ₂ ×10 ⁻² (mm ⁻³)	Ae(mm ²)	Le(mm)	Ve(mm ³)	
PE22 DT138X20X58	0.33806	0.04235	798	270	215000	1020
PC40 DT138X20X58						
PE22 DT200X20X100	0.40121	0.04087	982	394	387000	1870
PC40 DT200X20X100						

SP CORE

CORE SHAPES AND DIMENSIONS/CHARACTERISTICS



Part No.	Dimensions (mm)		
	A	B	C
PE22 SP135X65X20	135±2.5	20±0.5	65±1.5
PC40 SP135X65X20			
PE22 SP185X110X20	185±4.5	20±0.5	110±2
PC40 SP185X110X20			
PE22 SP250X155X20	250±5	20±0.5	155±3
PC40 SP250X155X20			

PRODUCT IDENTIFICATION

PE22 SP 135 × 65 × 20
(1) (2) (3) (4) (5)

- (1) Material name
- (2) Shape
- (3) Dimension A
- (4) Dimension B
- (5) Dimension C

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382