

Ferrite Cores

For High Frequency Welding
Impeder Cores

ZR, ZRH, ZRS, ZRSH Series

IMPEDERS FOR HIGH FREQUENCY WELDING

An impeder core is an essential accessory for the welding of tubes and pipes using high frequency waveguide heating. The characteristics and durability of the impeder core have a significant effect on the efficiency and stability of the welding process. Thanks to advances in technology and experience gained from manufacturing with IP1 (TDK's previous impeder material), the new IPH material provides high efficiency, energy savings, and long lifetimes.

APPLICATIONS


Pipe welding

FEATURES

IPH has a much lower reluctance than IP1 (60% lower according to our measurements). The result is that internal heating, which reduces the saturation magnetic flux density, can be suppressed, and the welding process is very efficient.

PIPE WELDING USING AN IMPEDER CORE

The impeder core concentrates the magnetic flux generated by the work coil into the area of the pipe joint. Consequently, use of an impeder core massively increases the efficiency of the welding process.

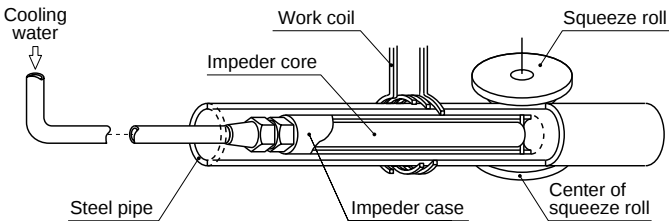


CHARACTERISTICS OF THE MATERIAL IPH

Initial permeability (μ_i)	1800 $\pm$ 25%	(H=0.24A/m, f=100kHz, at23°C)
Saturation magnetic flux density (Bs)	500mT $\pm$ 10%	(H=1194A/m, at23°C)
Core loss (Pcv)	$\leq$ 2000W/kg	(f=400kHz, B=200mT, at100°C)
Curie temperature (Tc)	>200°C	
Density (d)	4.8 $\times$ 10 ³ kg/m ³	
Resistivity (ρ)	3.0 $\Omega\cdot$ m	


*Measurements based on a toroidal core

IMPEDER CORES

Core loss vs. Temperature

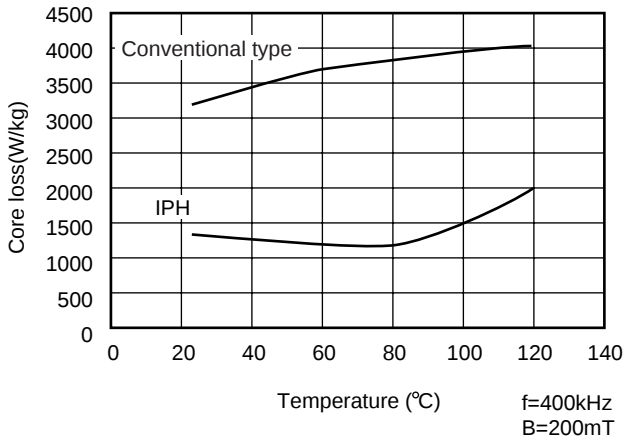

Saturation magnetic flux density vs. Temperature

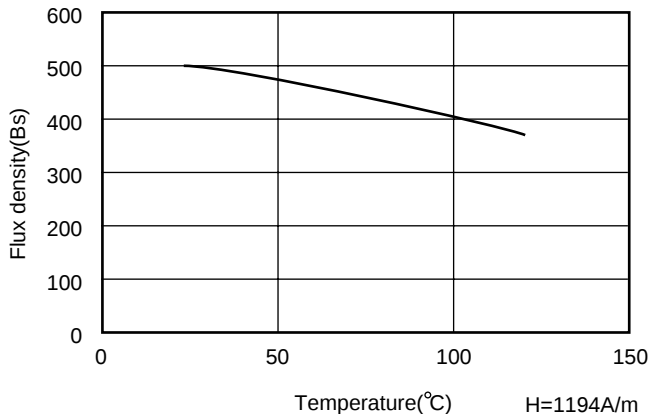

Ferrite Cores

ZR, ZRH, ZRS, ZRSH Series

For High Frequency Welding
Impeder Cores


ZR TYPE
FEATURES

ZR type impeder cores have a truncated circular cross-section and are widely used in small pipes. In medium or large pipes, they can be combined to make a multiple-core impeder.

CAUTION

Please take care to only use an impeder case with an appropriate internal diameter.

Before using this product, please note that it is not guaranteed for use as anything other than an impeder.

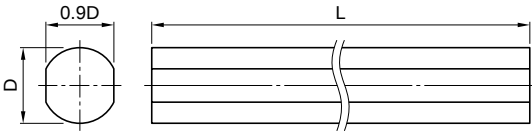

Part No. (D×L)	External diameter D	Length L	Lengthwise structure	Recommended internal diameter of impeder case
IPH ZR3×200	3±0.20	200±3.0	One piece	4
IPH ZR4×200	4±0.20	200±3.0	One piece	5
IPH ZR5×200	5±0.25	200±3.0	One piece	6
IPH ZR6×200	6±0.25	200±3.0	One piece	7
IPH ZR7×200	7±0.20	200±3.0	One piece	8
IPH ZR8×200	8±0.20	200±3.0	One piece	9
IPH ZR9×200	9±0.25	200±3.0	One piece	10
IPH ZR10×200	10±0.25	200±3.0	One piece	11
IPH ZR11×200	11±0.30	200±3.0	One piece	12
IPH ZR12×200	12±0.30	200±3.0	One piece	13
IPH ZR13×200	13±0.35	200±3.0	One piece	14
IPH ZR14×200	14±0.35	200±3.0	One piece	15
IPH ZR15×200	15±0.40	200±3.0	One piece	16
IPH ZR16×200	16±0.40	200±3.0	One piece	17
IPH ZR17×200	17±0.45	200±3.0	One piece	18
IPH ZR18×200	18±0.45	200±3.0	One piece	19
IPH ZR19×200	19±0.50	200±3.0	One piece	20
IPH ZR20×200	20±0.50	200±3.0	One piece	21
IPH ZR21×200	21±0.55	200±3.0	One piece	22
IPH ZR22×200	22±0.55	200±3.0	One piece	23

Dimensions in mm				
Part No. (D×L)	External diameter D	Length L	Lengthwise structure	Recommended internal diameter of impeder case
IPH ZR23×200	23±0.60	200±3.0	2 pieces joined	24
IPH ZR24×200	24±0.60	200±3.0	2 pieces joined	25
IPH ZR25×200	25±0.65	200±3.0	2 pieces joined	26
IPH ZR26×200	26±0.65	200±3.0	2 pieces joined	27
IPH ZR27×200	27±0.70	200±3.0	8 pieces joined	28
IPH ZR28×200	28±0.70	200±3.0	8 pieces joined	29
IPH ZR29×200	29±0.75	200±3.0	8 pieces joined	30
IPH ZR30×200	30±0.75	200±3.0	8 pieces joined	31
IPH ZR35×200	35±0.90	200±3.0	10 pieces joined	37
IPH ZR40×200	40±1.00	200±3.0	10 pieces joined	42

PRODUCT IDENTIFICATION

$$\frac{\text{IPH}}{(1)} \frac{\text{ZR}}{(2)} \frac{10}{(3)} \times \frac{200}{(4)}$$

- (1) Material
- (2) Shape
- (3) External diameter D
- (4) Length L

Ferrite Cores

ZR, ZRH, ZRS, ZRSH Series


For High Frequency Welding Impeder Cores

ZRH TYPE

FEATURES

The ZRH type is tubular, with the center hole permitting the flow of cooling water. These impeder cores are used individually, in both small and large diameter pipes.

A service bit can be passed through the center hole, but please be very careful when using a service bit, as the condition of the center hole may make insertion of the bit difficult.

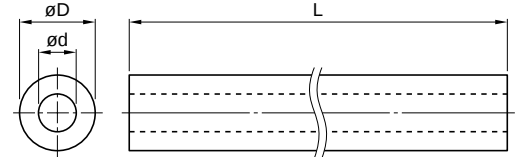

CAUTION

Please take care to only use an impeder case with an appropriate internal diameter.

Before using this product, please note that it is not guaranteed for use as anything other than an impeder.

Dimensions in mm

Part No. (D×L×d)	External Diameter D	Length L	Internal diameter d	Lengthwise structure	Recommended internal diameter of impeder case
IPH ZRH6×200×3	6±0.25	200±3.0	3±0.2	One piece	7
IPH ZRH7×200×3	7±0.25	200±3.0	3±0.2	One piece	8
IPH ZRH8×200×4	8±0.25	200±3.0	4±0.2	One piece	9
IPH ZRH9×200×4	9±0.30	200±3.0	4±0.2	One piece	10
IPH ZRH10×200×5	10±0.30	200±3.0	5±0.25	One piece	11
IPH ZRH11×200×5	11±0.35	200±3.0	5±0.25	One piece	12
IPH ZRH12×200×6	12±0.35	200±3.0	6±0.25	One piece	13
IPH ZRH13×200×6	13±0.40	200±3.0	6±0.25	One piece	14
IPH ZRH14×200×7	14±0.40	200±3.0	7±0.25	One piece	15
IPH ZRH15×200×7	15±0.45	200±3.0	7±0.25	One piece	16
IPH ZRH16×200×8	16±0.50	200±3.0	8±0.25	One piece	17
IPH ZRH17×200×8	17±0.50	200±3.0	8±0.25	One piece	18
IPH ZRH18×200×9	18±0.55	200±3.0	9±0.30	One piece	19
IPH ZRH19×200×9	19±0.55	200±3.0	9±0.30	One piece	20
IPH ZRH20×200×10	20±0.60	200±3.0	10±0.30	One piece	21
IPH ZRH21×200×10	21±0.60	200±3.0	10±0.30	One piece	22
IPH ZRH22×200×11	22±0.65	200±3.0	11±0.35	8 pieces joined	23
IPH ZRH23×200×11	23±0.6	200±3.0	11±0.30	8 pieces joined	24
IPH ZRH24×200×12	24±0.60	200±3.0	12±0.30	8 pieces joined	25
IPH ZRH25×200×12	25±0.65	200±3.0	12±0.30	8 pieces joined	26
IPH ZRH26×200×13	26±0.65	200±3.0	13±0.35	8 pieces joined	27
IPH ZRH27×200×13	27±0.70	200±3.0	13±0.35	8 pieces joined	28
IPH ZRH28×200×14	28±0.70	200±3.0	14±0.35	8 pieces joined	29
IPH ZRH29×200×14	29±0.75	200±3.0	14±0.35	8 pieces joined	30
IPH ZRH30×200×15	30±0.75	200±3.0	15±0.40	8 pieces joined	31
IPH ZRH32×200×16	32±0.80	200±3.0	16±0.40	8 pieces joined	34
IPH ZRH34×200×17	34±0.85	200±3.0	17±0.45	8 pieces joined	36
IPH ZRH36×200×18	36±0.90	200±3.0	18±0.45	8 pieces joined	38
IPH ZRH38×200×19	38±0.95	200±3.0	19±0.50	8 pieces joined	40
IPH ZRH40×200×20	40±1.00	200±3.0	20±0.50	8 pieces joined	42
IPH ZRH42×200×21	42±1.05	200±3.0	21±0.55	8 pieces joined	44
IPH ZRH44×200×22	44±1.10	200±3.0	22±0.55	8 pieces joined	46
IPH ZRH46×200×23	46±1.15	200±3.0	23±0.60	8 pieces joined	48
IPH ZRH48×200×24	48±1.20	200±3.0	24±0.60	8 pieces joined	50
IPH ZRH50×200×25	50±1.25	200±3.0	25±0.65	10 pieces joined	52
IPH ZRH52×200×26	52±1.30	200±3.0	26±0.65	10 pieces joined	54
IPH ZRH54×200×27	54±1.35	200±3.0	27±0.70	10 pieces joined	56
IPH ZRH56×200×28	56±1.40	200±3.0	28±0.70	10 pieces joined	58
IPH ZRH58×200×29	58±1.45	200±3.0	29±0.75	10 pieces joined	60
IPH ZRH60×200×30	60±1.50	200±3.0	30±0.75	10 pieces joined	62
IPH ZRH65×200×32	65±1.65	200±3.0	32±0.80	10 pieces joined	67
IPH ZRH70×200×35	70±1.75	200±3.0	35±0.90	10 pieces joined	73
IPH ZRH75×200×38	75±1.90	200±3.0	38±0.95	10 pieces joined	78
IPH ZRH80×200×40	80±2.00	200±3.0	40±1.00	10 pieces joined	83

PRODUCT IDENTIFICATION

IPH ZRH 10 200 5
(1) (2) (3) × (4) × (5)

- (1) Material
- (2) Shape
- (3) External diameter D
- (4) Length L
- (5) Internal diameter d

Ferrite Cores


For High Frequency Welding Impeder Cores

ZR, ZRH, ZRS, ZRSH Series

ZRS TYPE
FEATURES

The ZRS type features deep grooves which permit improved cooling by ensuring that the entire core is optimally cooled.

CAUTION
Please take care to only use an impeder case with an appropriate internal diameter.
Before using this product, please note that it is not guaranteed for use as anything other than an impeder.

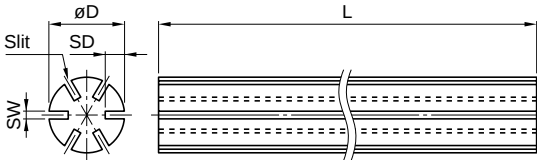

Dimensions in mm

Part No. (D×L)	External diameter D	Length L	Number of slit	Lengthwise structure	Recommended internal diameter of impeder case
IPH ZRS5×200	5±0.25	200±3.0	6	One piece	6
IPH ZRS6×200	6±0.25	200±3.0	6	One piece	7
IPH ZRS7×200	7±0.25	200±3.0	6	One piece	8
IPH ZRS8×200	8±0.25	200±3.0	6	One piece	9
IPH ZRS9×200	9±0.30	200±3.0	6	One piece	10
IPH ZRS10×200	10±0.30	200±3.0	6	One piece	11
IPH ZRS11×200	11±0.35	200±3.0	8	One piece	12
IPH ZRS12×200	12±0.35	200±3.0	8	One piece	13
IPH ZRS13×200	13±0.40	200±3.0	8	One piece	14
IPH ZRS14×200	14±0.40	200±3.0	8	One piece	15
IPH ZRS15×200	15±0.45	200±3.0	8	One piece	16
IPH ZRS16×200	16±0.50	200±3.0	8	One piece	17
IPH ZRS17×200	17±0.50	200±3.0	8	One piece	18
IPH ZRS18×200	18±0.55	200±3.0	8	One piece	19
IPH ZRS19×200	19±0.55	200±3.0	8	One piece	20
IPH ZRS20×200	20±0.60	200±3.0	8	One piece	21
IPH ZRS21×200	21±0.60	200±3.0	8	One piece	22
IPH ZRS22×200	22±0.55	200±3.0	8	8 pieces joined	23
IPH ZRS23×200	23±0.60	200±3.0	8	8 pieces joined	24
IPH ZRS24×200	24±0.60	200±3.0	8	8 pieces joined	25
IPH ZRS25×200	25±0.65	200±3.0	8	8 pieces joined	26
IPH ZRS30×200	30±0.75	200±3.0	8	8 pieces joined	31

PRODUCT IDENTIFICATION

- IPH

ZRS

10

200

(1)(2)(3)×(4)
- (1) Material

(2) Shape

(3) External diameter D

(4) Length L

Ferrite Cores


ZR, ZRH, ZRS, ZRSH Series

For High Frequency Welding
Impeder Cores

ZRSH TYPE

FEATURES

The ZRSH type combines the features of the ZRS type and the ZRH type, with a center hole permitting the flow of cooling water. A service bit can be passed through the center hole, but please be very careful when using a service bit, as the condition of the center hole may make insertion of the bit difficult.

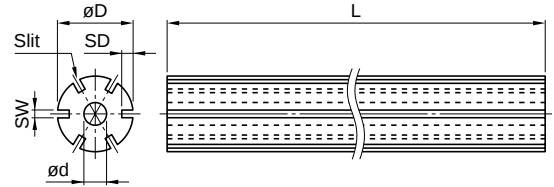

CAUTION

Please take care to only use an impeder case with an appropriate internal diameter.

Before using this product, please note that it is not guaranteed for use as anything other than an impeder.

Dimensions in mm

Part No. (D×L×d)	External Diameter D	Length L	Internal diameter d	Number of slit	Lengthwise structure	Recommended internal diameter of impeder case
IPH ZRSH10×200×3	10±0.30	200±3.0	3±0.20	6	One piece	11
IPH ZRSH11×200×3	11±0.35	200±3.0	3±0.20	8	One piece	12
IPH ZRSH12×200×3	12±0.35	200±3.0	3±0.20	8	One piece	13
IPH ZRSH13×200×5	13±0.40	200±3.0	5±0.25	8	One piece	14
IPH ZRSH14×200×5	14±0.40	200±3.0	5±0.25	8	One piece	15
IPH ZRSH15×200×5	15±0.45	200±3.0	5±0.25	8	One piece	16
IPH ZRSH16×200×5	16±0.50	200±3.0	5±0.25	8	One piece	17
IPH ZRSH17×200×5	17±0.50	200±3.0	5±0.25	8	One piece	18
IPH ZRSH18×200×5	18±0.55	200±3.0	5±0.25	8	One piece	19
IPH ZRSH19×200×6	19±0.55	200±3.0	6±0.25	8	One piece	20
IPH ZRSH20×200×6	20±0.60	200±3.0	6±0.25	8	One piece	21
IPH ZRSH21×200×6	21±0.60	200±3.0	6±0.25	8	One piece	22
IPH ZRSH22×200×6	22±0.65	200±3.0	6±0.25	8	One piece	23
IPH ZRSH23×200×6	23±0.70	200±3.0	6±0.25	8	8 pieces joined	24
IPH ZRSH25×200×10	25±0.65	200±3.0	10±0.25	8	8 pieces joined	26
IPH ZRSH26×200×13	25±0.65	200±3.0	13±0.35	8	8 pieces joined	27
IPH ZRSH27×200×13	27±0.70	200±3.0	13±0.35	8	8 pieces joined	28
IPH ZRSH28×200×13	28±0.70	200±3.0	13±0.35	8	8 pieces joined	29
IPH ZRSH30×200×15	30±0.75	200±3.0	15±0.40	8	8 pieces joined	31
IPH ZRSH40×200×20	40±1.0	200±3.0	20±0.50	8	8 pieces joined	42

PRODUCT IDENTIFICATION

$$\frac{\text{IPH}}{(1)} \frac{\text{ZRSH}}{(2)} \frac{10}{(3)} \times \frac{200}{(4)} \times \frac{5}{(5)}$$

- (1) Material
- (2) Shape
- (3) External diameter D
- (4) Length L
- (5) Internal diameter d

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382