

# Amorphous Cores

## For Smoothing Choke

### 10 to 200W Max. Output

## NC Series

### NC SERIES/CORE

#### FEATURES

- Excellent direct current superposition characteristics with high saturation magnetic flux density.
- Core loss decreased to 1/3 compared to the previous gap amorphous choke coil.
- No magnetic flux leakage is expected from the gap as it has no gap.
- High magnetic permeability of  $\mu_i=250$  has been achieved.

#### APPLICATIONS

- Choke coils for switching power output smoothing circuit.
- Choke coils for DC to DC converters
- Normal mode choke coils

#### PRODUCT IDENTIFICATIONS

##### CORE

NC20 T 20 X 10 X 12  
(1) (2) (3) (4) (5)

- (1) Material name (3) Outer diameter dimension  
(2) Shape (4) Height dimension  
T: Toroidal (5) Inner diameter dimension

##### INDUCTOR

NC T 20 - 681 L 1 - 1 0  
(1) (2) (3) (4) (5) (6) (7) (8)


- (1) Series name (5) Inductance tolerance code  
(2) Shape L:  $\geq -25\%$   
T: Toroidal (6) Rated current (A)  
(3) Core outer diameter (7) TDK internal code  
dimension (8) Base indication code  
(4) Inductance value ( $\mu\text{H}$ ) 0: without base/B: with base

#### OPERATING CONDITIONS

Temperature range	-40 to +120°C
Humidity range	0 to 95%RH [Maximum wet-bulb temperature: 38°C]

#### STANDARD MATERIAL CHARACTERISTICS

Material		NC20
Initial permeability $\mu_i$		250
Curie temperature $T_c$	(°C)	400
Saturation magnetic flux density $B_s$ [H=8000A/m]	(mT)	
	at 25°C	1150
	at 60°C	1130
	at 80°C	1110
	at 100°C	1090
Remanent flux density $B_r$	(mT)	
	at 25°C	150
	at 60°C	160
	at 80°C	160
	at 100°C	170
Coercive force $H_c$	(A/m)	
	at 25°C	160
	at 60°C	160
	at 80°C	150
	at 100°C	150
Density $d_b$	(kg/m <sup>3</sup> )	$7.2 \times 10^3$

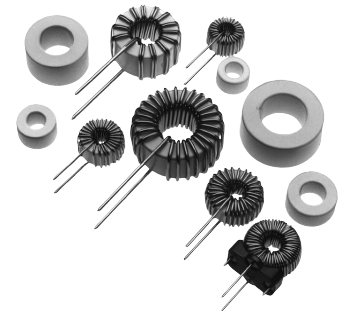

# Amorphous Cores

## For Smoothing Choke


### 10 to 200W Max. Output

## NC Series


### NC SERIES/CORE

### TYPICAL MATERIAL CHARACTERISTICS


#### B-H CHARACTERISTICS

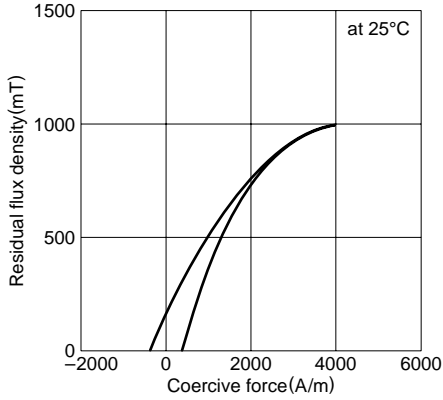


#### INITIAL PERMEABILITY vs. TEMPERATURE CHARACTERISTICS

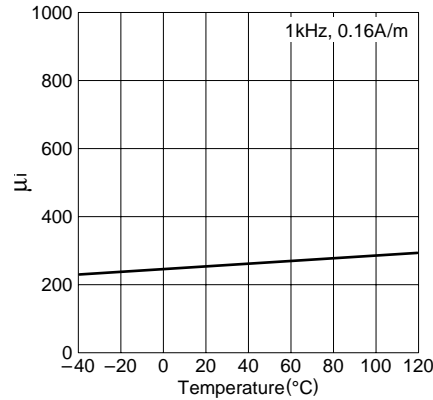


#### CORE LOSS vs. TEMPERATURE CHARACTERISTICS

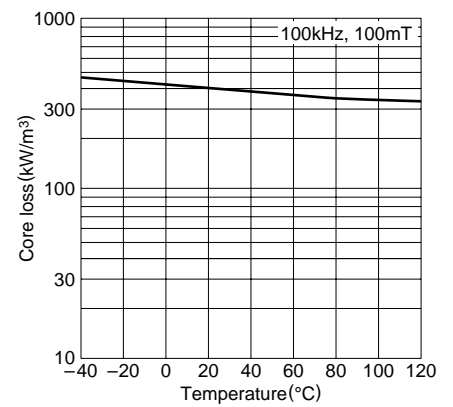

#### CORE LOSS vs. FREQUENCY CHARACTERISTICS

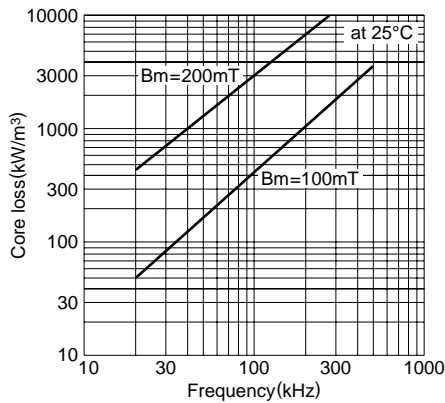

#### INITIAL PERMEABILITY vs. FREQUENCY CHARACTERISTICS

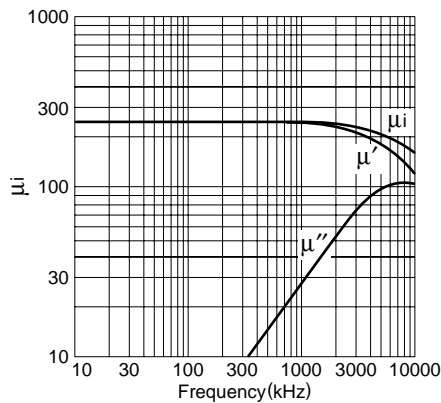

# Amorphous Cores


## For Smoothing Choke

### 10 to 200W Max. Output

## NC Series

### NC SERIES/CORE

### SHAPES AND DIMENSIONS/CHARACTERISTICS




Part No.	Dimensions (mm)			Core constant C1 (mm <sup>-1</sup> )	Effective cross-sectional area Ae (mm <sup>2</sup> )	Effective magnetic path length le (mm)	Effective core volume Ve (mm <sup>3</sup> )	AL-value(nH/N <sup>2</sup> )	
	øA max.	øB min.	C max.					Initial value	Rated value [H=2000A/m]
NC20T10X5X7	11.2	5.8	7.3	3.52	7.42	26.15	194.1	89-25%	62-25%
NC20T12X5X7	13.2	5.8	7.3	2.33	12.2	28.45	347.1	135-25%	94-25%
NC20T15X5X9	16.2	7.8	7.3	2.46	14.68	36.11	530	128-25%	89-25%
NC20T20X10X12	21.2	10.8	11.9	1.23	39.14	48.14	1884	255-25%	179-25%
NC20T25X10X16	26.7	14.4	12.3	1.41	44.26	62.31	2758	223-25%	156-25%

• Case material : PBT(UL Grade 94V-0)

### TYPICAL ELECTRICAL CHARACTERISTICS

#### DC SUPERPOSITION CHARACTERISTICS

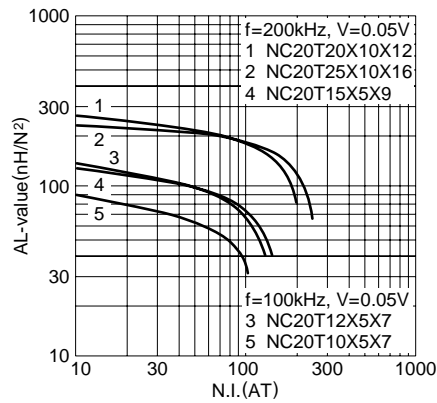

# Amorphous Cores



## For Smoothing Choke

### 10 to 200W Max. Output

## NC Series

### NC SERIES/INDUCTOR

### CHOKE COILS FOR SWITCHING POWER OUTPUT SMOOTHING CIRCUIT SHAPES AND DIMENSIONS/ELECTRICAL CHARACTERISTICS

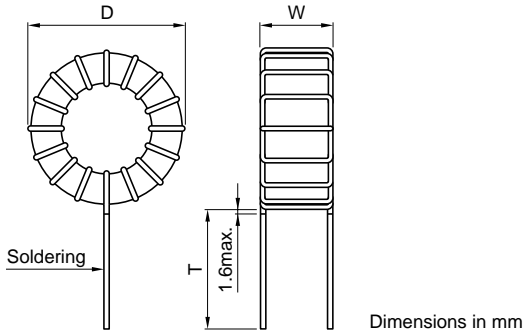

Part No.	Rated current $I_{ac}$ (A)	Inductance $L$ ( $\mu$ H)ref.	Saturation current $I_m$ (A)ref.	DC resistance $R_{dc}$ ( $m\Omega$ )max.	Winding diameter $\phi$ (mm)	Dimensions (mm)max.		
						D	W	T
NCT10-151L1-10	1	150	2	117	0.5	14.5	11	15
NCT10-470L2-10	2	47	4	47	0.6	15	11	15
NCT12-221L1-10	1	220	2	121	0.5	16.5	11	15
NCT12-101L2-10	2	100	4	65	0.6	17	11.5	15
NCT12-330L3-10	3	33	6	20	0.8	17	11.5	15
NCT15-331L1-10	1	330	2	159	0.5	19.5	11.5	15
NCT15-151L2-10	2	150	4	81	0.6	20	11.5	15
NCT15-680L3-10	3	68	6	33	0.8	20	12	15
NCT15-330L4-10	4	33	8	17	0.9	20.5	11.5	15
NCT15-220L5-10	5	22	10	12	1	20.5	12	15
NCT20-681L1-10	1	680	2	206	0.5	25	15.5	25
NCT20-471L2-10	2	470	4	83	0.8	26	17	25
NCT20-221L3-10	3	220	6	45	0.9	26.5	17.5	25
NCT20-101L4-10	4	100	8	29	0.9	26	16.5	25
NCT20-680L5-10	5	68	10	20	1	26.5	17	25
NCT20-470L6-10	6	47	12	14	1.1	27	17.5	25
NCT20-330L8-10	8	33	16	11	1.2	27	17.5	25
NCT25-331L3-10	3	330	6	56	0.9	31	17.5	25
NCT25-221L4-10	4	220	8	49	0.9	31.5	17	25
NCT25-151L5-10	5	150	10	33	1	31.5	17.5	25
NCT25-101L6-10	6	100	12	23	1.1	32	17.5	25
NCT25-470L8-10	8	47	16	13	1.2	32.5	18	25
NCT25-330L10-10	10	33	20	12	1.2	32.5	18	25

- Saturation current  $I_m$  is the direct bias current at 1/2 rated inductance value.
- Case material: PBT(UL Grade 94V-0)

# Amorphous Cores


## For Smoothing Choke

### 10 to 200W Max. Output

## NC Series

### NC SERIES/INDUCTOR

### CHOKE COILS FOR SWITCHING POWER OUTPUT SMOOTHING CIRCUIT(WITH BASE) SHAPES AND DIMENSIONS/ELECTRICAL CHARACTERISTICS

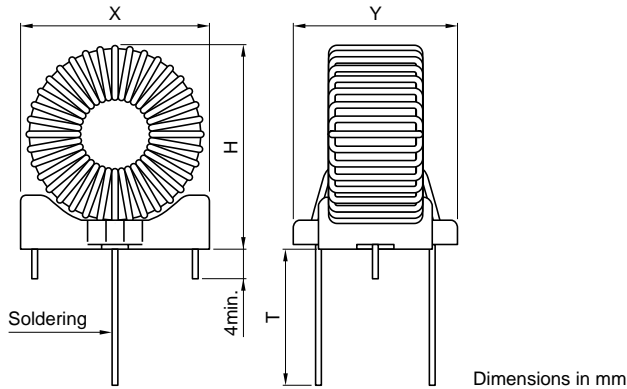

Part No.	Rated current Iac (A)	Inductance L ( $\mu$ H)ref.	Saturation current Im (A)ref.	DC resistance Rdc (m $\Omega$ )max.	Winding diameter $\phi$ (mm)	Dimensions (mm)max.			
						H	X	Y	T
NCT10-151L1-1B	1	150	2	117	0.5	16.5	18	15	13
NCT10-470L2-1B	2	47	4	47	0.6	17	18	15	13
NCT12-221L1-1B	1	220	2	121	0.5	18.5	18	15	13
NCT12-101L2-1B	2	100	4	65	0.6	19	18	15	13
NCT12-330L3-1B	3	33	6	20	0.8	19	18	15	13
NCT15-331L1-1B	1	330	2	159	0.5	21.5	18	15	13
NCT15-151L2-1B	2	150	4	81	0.6	22	18	15	13
NCT15-680L3-1B	3	68	6	33	0.8	22	18	15	13
NCT15-330L4-1B	4	33	8	17	0.9	22.5	18	15	13
NCT15-220L5-1B	5	22	10	12	1	22.5	18	15	13
NCT20-681L1-1B	1	680	2	206	0.5	28	26	21	23
NCT20-471L2-1B	2	470	4	83	0.8	29	26	21	23
NCT20-221L3-1B	3	220	6	45	0.9	29.5	26	21	23
NCT20-101L4-1B	4	100	8	29	0.9	29	26	21	23
NCT20-680L5-1B	5	68	10	20	1	29.5	26	21	23
NCT20-470L6-1B	6	47	12	14	1.1	30	26	21	23
NCT20-330L8-1B	8	33	16	11	1.2	30	26	21	23
NCT25-331L3-1B	3	330	6	56	0.9	34	26	21	23
NCT25-221L4-1B	4	220	8	49	0.9	34.5	26	21	23
NCT25-151L5-1B	5	150	10	33	1	34.5	26	21	23
NCT25-101L6-1B	6	100	12	23	1.1	35	26	21	23
NCT25-470L8-1B	8	47	16	13	1.2	35.5	26	21	23
NCT25-330L10-1B	10	33	20	12	1.2	35.5	26	21	23

- Saturation current Im is the direct bias current at 1/2 rated inductance value.
- Case material: PBT(UL Grade 94V-0)
- NCT10, NCT12 and NCT15 correspond to the base BT18/11-2CPV, and NCT20 and NCT25 correspond to the base BT26/15-2CPV.

# Amorphous Cores

## For Smoothing Choke

### 10 to 200W Max. Output

## NC Series


### NC SERIES/INDUCTOR

### CHOKE COILS FOR SWITCHING POWER OUTPUT SMOOTHING CIRCUIT


### TYPICAL ELECTRICAL CHARACTERISTICS

### INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS


#### NCT10 TYPE

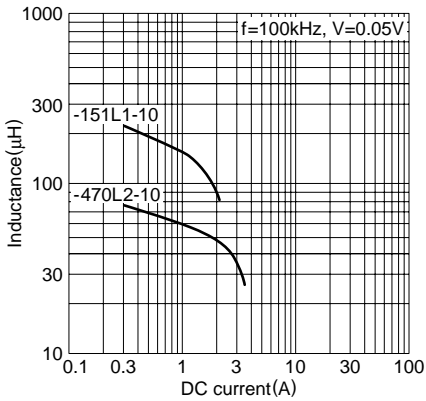


#### NCT12 TYPE

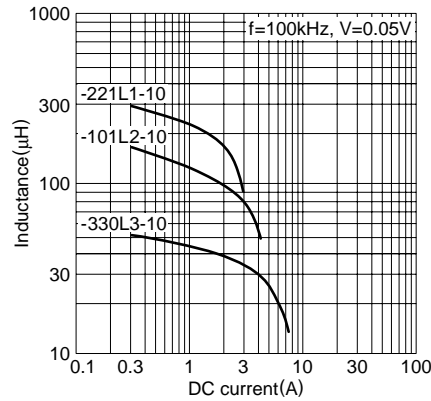


#### NCT15 TYPE

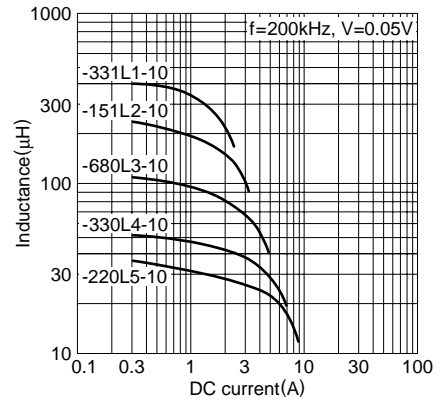

#### NCT20 TYPE

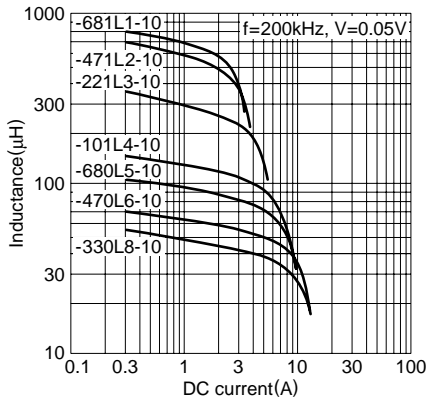

#### NCT25 TYPE

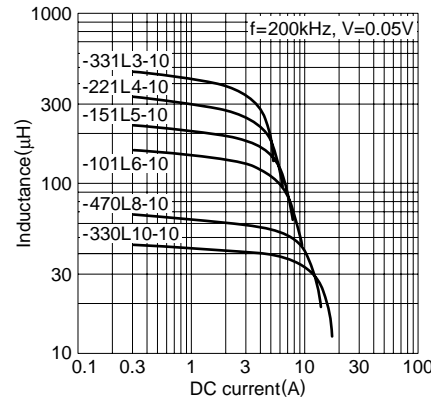

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382