

Ceramic Capacitors

CKD Series CKD110, CKD310, CKD510 Types

Low ESL Feed Through SMD

FEATURES

- These small low-cost filters are used for meeting EMC requirements.
- Can be used up to even higher frequencies due to low parasitic inductance.
- Optimized for use as a noise bypass capacitors for signal and power source circuits.
- TDK is also preparing an array-type filter. Inquiries are welcome.



APPLICATIONS

For digital and analog signal line noise bypassing signal line

PRODUCT IDENTIFICATION

CKD 510 JB 1E 220 S —
(1) (2) (3) (4) (5) (6) (7)

(1) Series name

(2) Dimensions

110	3.2×1.25×1mm
310	3.2×1.6×1.8mm
510	2×1.25×1mm

(3) Capacitance temperature characteristics

Temperature characteristics	Capacitance change	Temperature range
X5R	±15%	-55 ~ +85°C

(4) Rated voltage E_{dc}

1C	16V
1E	25V
1H	50V

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

R designates a decimal point.

220	22pF
101	100pF
222	2200pF
473	47000pF



(6) Capacitance tolerance

S	+50, -20%
---	-----------


(7) Packaging style

T	Taping (reel)
B	Bulk

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM



RECOMMENDED PC BOARD PATTERN (REFLOW)

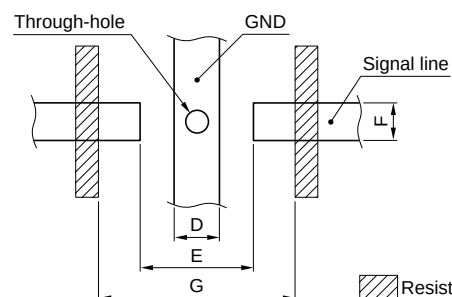

Dimensions in mm

Application	Type	L	W	T	B	C	D	E	F	G	Weight(mg)
For Signal and Power Line	CKD510	2±0.2	1.25±0.2	0.85±0.15	0.2min.	0.5±0.2	0.6	1.5	1	2.6	11
For Power Line	CKD310	3.2±0.2	1.6±0.2	1.8max.	0.2min.	0.95±0.3	1.4	2.5	1	4.5	33
For Signal Line	CKD110	3.2±0.2	1.25±0.2	0.85±0.15	0.2min.	0.95±0.3	1.4	2.5	1	4.5	17

Ceramic Capacitors

CKD Series CKD110, CKD310, CKD510 Types

Low ESL Feed Through
SMD

ELECTRICAL CHARACTERISTICS FOR SIGNAL LINE

CKD110 TYPE

RATED VOLTAGE E_{dc}: 25V

Capacitance (pF)	Tolerance (%)	Rated current I _{dc} (mA)max.	Insulation resistance (MΩ)min.	DC resistance* (Ω)max.	Part No.
22	+50, -20	200	1000	0.6	CKD110X5R1E220S
47	+50, -20	200	1000	0.6	CKD110X5R1E470S
100	+50, -20	200	1000	0.6	CKD110X5R1E101S
220	+50, -20	200	1000	0.6	CKD110X5R1E221S
470	+50, -20	200	1000	0.6	CKD110X5R1E471S
1000	+50, -20	200	1000	0.6	CKD110X5R1E102S
2200	+50, -20	200	1000	0.6	CKD110X5R1E222S
4700	+50, -20	200	1000	0.6	CKD110X5R1E472S
10000	+50, -20	500	1000	0.3	CKD110X5R1E103S
22000	+50, -20	500	1000	0.3	CKD110X5R1E223S
47000	+50, -20	500	1000	0.3	CKD110X5R1E473S
100000	+50, -20	500	1000	0.3	CKD110X5R1E104S

* DC resistance value is between feed-through terminals.

CKD510 TYPE

RATED VOLTAGE E_{dc}: 50V

Capacitance (pF)	Tolerance (%)	Rated current I _{dc} (mA)max.	Insulation resistance (MΩ)min.	DC resistance* (Ω)max.	Part No.
22	+50, -20	400	1000	0.5	CKD510X5R1H220S
47	+50, -20	400	1000	0.5	CKD510X5R1H470S
100	+50, -20	400	1000	0.5	CKD510X5R1H101S
220	+50, -20	400	1000	0.5	CKD510X5R1H221S
470	+50, -20	400	1000	0.5	CKD510X5R1H471S
1000	+50, -20	400	1000	0.5	CKD510X5R1H102S
2200	+50, -20	400	1000	0.5	CKD510X5R1H222S
4700	+50, -20	400	1000	0.5	CKD510X5R1H472S

* DC resistance value is between feed-through terminals.

FOR POWER LINE

CKD510 TYPE

RATED VOLTAGE E_{dc}: 25V

Capacitance (pF)	Tolerance (%)	Rated current I _{dc} (mA)max.	Insulation resistance (MΩ)min.	DC resistance* (Ω)max.	Part No.
10000	+50, -20	1000	1000	0.08	CKD510X5R1E103S
22000	+50, -20	1000	1000	0.08	CKD510X5R1E223S
47000	+50, -20	1000	1000	0.08	CKD510X5R1E473S
100000	+50, -20	1000	1000	0.08	CKD510X5R1E104S

* DC resistance value is between feed-through terminals.

CKD310 TYPE

RATED VOLTAGE E_{dc}: 16V

Capacitance (pF)	Tolerance (%)	Rated current I _{dc} (mA)max.	Insulation resistance (MΩ)min.	DC resistance* (Ω)max.	Part No.
100000	+50, -20	2000	100	0.04	CKD310X5R1C104S
220000	+50, -20	2000	100	0.04	CKD310X5R1C224S
470000	+50, -20	2000	100	0.04	CKD310X5R1C474S
1000000(1μF)	+50, -20	2000	100	0.04	CKD310X5R1C105S

* DC resistance value is between feed-through terminals.

Ceramic Capacitors

Low ESL Feed Through
SMD


CKD Series CKD110, CKD310, CKD510 Types

TYPICAL ELECTRICAL CHARACTERISTICS


ATTENUATION vs. FREQUENCY CHARACTERISTICS

COMPARISON WITH EXISTING PRODUCTS


Excellent noise bypass effect is displayed in higher frequency range compared with ordinary chip capacitors.

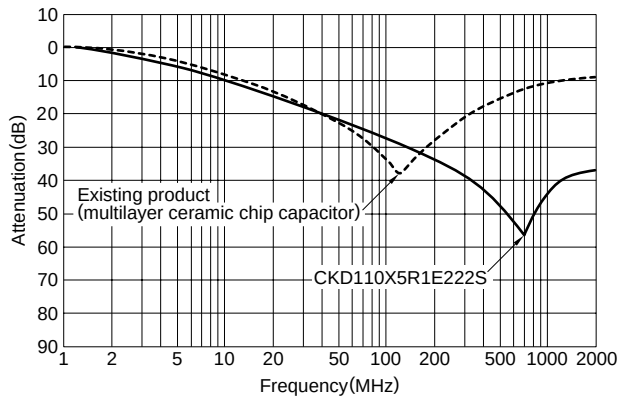

CKD110 TYPE

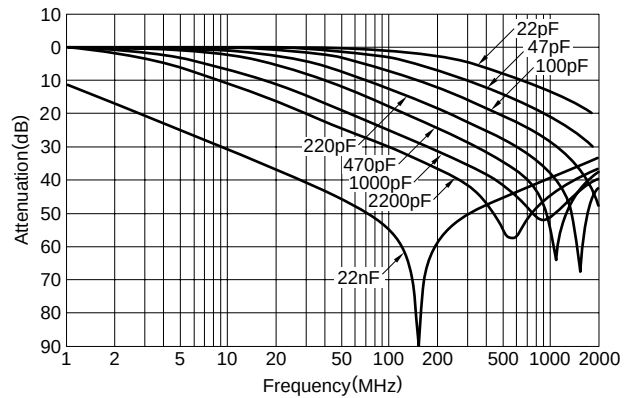


MEASURING CIRCUIT



EXAMPLES OF NOISE COUNTERMEASURE

Purpose	1. Noise countermeasure on IC power supply lines: Eliminates noise occurring on supply lines to assure a stable voltage supply for proper IC operation.	2. Radiation noise countermeasure on signals lines: Attenuates superfluous high-frequency content of signals to prevent noise radiation.
Type	CKD310 (High capacity type product)	CKD110, CKD510


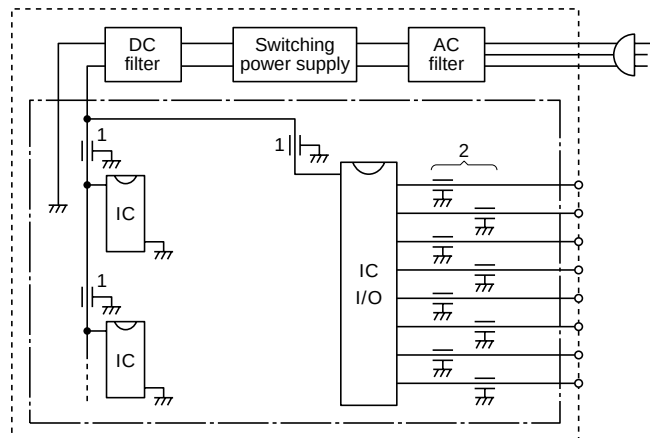


Ceramic Capacitors

CKD Series CKD110, CKD310, CKD510 Types

Low ESL Feed Through SMD

RELIABILITY AND TEST CONDITIONS

Item	Reliability	Test methods and test conditions														
Exterior	No remarkable abnormal exterior appearance.	Micrometer ($\times 3$)														
Insulation resistance	Minimum insulation resistance: $1000\text{M}\Omega$ or $100\text{M}\Omega \cdot \mu\text{F}$, whichever is smaller	Measurement voltage: Rated voltage Voltage applied time: 60s														
DC resistance (Rdc1, 2)	Less than 10000pF : $600\text{m}\Omega$ max. 10000pF min.: $300\text{m}\Omega$ max.	Measurement current: 100mA max.														
																
Withstand voltage	No dielectric nor mechanical damages.	Measurement voltage: 250% of rated DC voltage Voltage applied time: 1 to 5s Charge and discharge current: 50mA max.														
Capacitance	Within specified tolerance	Measured frequency: $1\text{kHz} \pm 10\%$ Measured voltage Erms: $1 \pm 0.2\text{V}$														
Dielectric dissipation factor (tan δ)	Rated voltage 25V min.: 0.025 max. Rated voltage 16V max.: 0.05 max.	Measured frequency: $1\text{kHz} \pm 10\%$ Measured voltage Erms: $1 \pm 0.2\text{V}$														
Solderability	Cover more than 75% of the terminal electrode part with new solder. 25% of the part may have any pin hole or rough spot but they must not be concentrated in one location. Ceramic original surface indicated as A (hatched) must not be exposed due to any peeling or dissolving of the electrode part.	Solder: H63A (JIS Z 3282) Flux: Isopropyl alcohol solution (JIS K 8839) of Rosin (JIS K 5902) (25wt %) Solder temperature: $235 \pm 5^\circ\text{C}$ Dipping: The terminal electrode must be immersed completely in solder. Dip time: $2 \pm 0.5\text{s}$														
																
Temperature cycle*	Exterior	No mechanical damages														
	Capacitance	Variance from previous test: $\pm 7.5\%$ max.														
	tan δ	Specified initial value must be satisfied.														
	Insulation resistance	Minimum insulation resistance: $500\text{M}\Omega$ or $50\text{M}\Omega \cdot \mu\text{F}$, whichever is smaller.														
	DC resistance 1Ω max. (Rdc1, 2)	<table border="1"> <thead> <tr> <th>Step</th><th>Temperature ($^\circ\text{C}$)</th><th>Time (min)</th></tr> </thead> <tbody> <tr> <td>1</td><td>-25 ± 3</td><td>30 ± 3</td></tr> <tr> <td>2</td><td>Room temperature</td><td>2 to 5</td></tr> <tr> <td>3</td><td>$+85 \pm 2$</td><td>30 ± 3</td></tr> <tr> <td>4</td><td>Room temperature</td><td>2 to 5</td></tr> </tbody> </table>	Step	Temperature ($^\circ\text{C}$)	Time (min)	1	-25 ± 3	30 ± 3	2	Room temperature	2 to 5	3	$+85 \pm 2$	30 ± 3	4	Room temperature
Step	Temperature ($^\circ\text{C}$)	Time (min)														
1	-25 ± 3	30 ± 3														
2	Room temperature	2 to 5														
3	$+85 \pm 2$	30 ± 3														
4	Room temperature	2 to 5														
Humidity resistance* (Normal state)	Exterior	No mechanical damage.														
	Capacitance	Variance from previous test: $\pm 10\%$ max.														
	tan δ	Max. 200% of specified initial value														
	Insulation resistance	Minimum insulation resistance: $500\text{M}\Omega$ or $10\text{M}\Omega \cdot \mu\text{F}$, whichever is smaller.														
	DC resistance 1Ω max. (Rdc1, 2)	Relative humidity: 90 to 95% RH Temperature: $40 \pm 2^\circ\text{C}$ Time: $500 \pm 24, -0\text{h}$ Measure after leaving the sample at room temperature and humidity for $48 \pm 4\text{h}$.														
High temperature resistance	Exterior	No mechanical damage														
	Capacitance	Variance from previous test: $\pm 12.5\%$ max.														
	tan δ	Max. 200% of specified initial value														
	Insulation resistance	Minimum insulation resistance: $500\text{M}\Omega$ or $50\text{M}\Omega \cdot \mu\text{F}$, whichever is smaller.														
	DC resistance 1Ω max. (Rdc1, 2)	Temperature: $85 \pm 2^\circ\text{C}$ Voltage: 200% of rated DC voltage Current: Rated current Time: $1000 \pm 48, -0\text{h}$ Charge and discharge current: 50mA max. Measure after leaving the sample at room temperature and humidity of $48 \pm 4\text{h}$. Voltage processing: Capacitor shall be tested at a specified temperature under a specified voltage for 1h and the initial value shall be measured after setting the sample at room temperature for $48 \pm 4\text{h}$.														

* Capacitors shall be tested at $150 \pm 0, -10^\circ\text{C}$ for 1 hour and the initial value shall be measured after setting the sample at room temperature and humidity for 48 ± 4 hours.

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382