

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose


FEATURES

- This series of light weight power supplies handles a wide range of source voltages(not used for switching between AC.100 and 200V) and provides multiple output voltages.
- Open frame.
- MRW-140, MRW-150, MRW-151, MRW-160 and MRW-161 types are equipped with operation indicator lights.
- These low noise power supplies are FCC class B compliant.

PART NUMBERS AND RATINGS

Part No.	Maximum output power* (W)	Output voltage1 V1		Output voltage2 V2		Output voltage3 V3	
		Voltage(V)	Current(A)	Voltage (V)	Current (A)	Voltage (V)	Current (A)
MRW-140	25.4	+5	0.2 to 1	+12	0.3 to 1.7		
MRW-130	25.5	+5	0.5 to 1.5	+12	0.3 to 1.5[1.7, 10s]		
MRW-135	28	+5	0.5 to 2	+12	0.3 to 1.5[2.5, 3s]		
MRW-150	35	+5	1 to 2.2[Max.4]	+12	0.6 to 1.8[Max.2.5]	-12	0 to 0.1[Max.0.3]
MRW-151	35	+5	1 to 2.2[Max.4]	+15	0.5 to 1.4[Max.2]	-15	0 to 0.1[Max.0.25]
MRW-350	40	+5	0.5 to 3	+12	0.3 to 2	-12	0 to 0.1
MRW-351	40	+5	0.5 to 3	+15.6	0.3 to 1.6	-15	0 to 0.1
MRW-352	40	+3.3	0.5 to 4	+12	0.3 to 2	-12	0 to 0.1
MRW-160	50	+5	1 to 5[Max.6]	+12	0.6 to 2[Max.2.5]	-12	0 to 0.1[Max.0.5]
MRW-161	50	+5	1 to 5[Max.6]	+15	0.5 to 1.5[Max.2]	-15	0 to 0.1[Max.0.4]
MRW-170	65	+5	0.8 to 5[Max.7]	+12	0.3 to 1.7[Max.2.5]	-12	0.3 to 0.7[Max.2.5]
MRW-171	65	+5	0.8 to 5[Max.7]	+15.8	0.3 to 1.3[Max.2]	-15.8	0.3 to 1.3[Max.2]

* Total output power(sum of the respective[output voltage × output current] values) can not exceed this maximum output power.

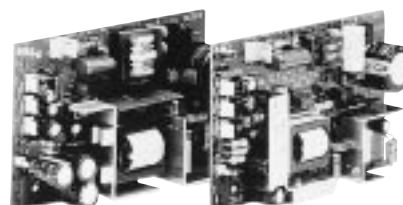

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-130		
Output voltage, current*1		V ₁	+5V • 1.5A	
		V ₂	+12V • 1.5A[Peak 1.7A, 10s max.]*4	
Maximum output power		W	25.5	
Input requirements				
Input voltage Eac		V	90 to 264	
Input frequency		Hz	47 to 66[Single phase]	
Input current		A	0.8max./0.5max.[100-120/200-240V]	
Fuse rating		A	2[Internal]	
Surge current		A	50max./100max.[100-120/200-240V, 25°C, cold start]	
Leakage current		mA	0.5max./0.75max.[100-120/200-240V]	
Efficiency		%	73typ.[100-120V]	
Output characteristics				
Output voltage		V	+5[V ₁] +12[V ₂]	
Voltage variable range		%	+5, −3 V ₂ varies simultaneously and in the same direction as V ₁	
Maximum output current*1		A	1.5 1.5[Peak 1.7A, 10s]*4	
Minimum output current*3		A	0.5 0.3	
Output setting conditions	Voltage	V	5±0.02 —	
	Current	A	1.5 1.5	
Voltage stability	Input variation	%	1max. 1.5max.[90 to 132V/180 to 264V]	
	Load variation*2	%	2max. 6max.	
	Temperature variation [0 to +50°C]	%	3max. 4max.	
	Total variation	%	+4, −3max. ±7max.	
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]	
	Dynamic load	%/ms	±4max./1max.[50 to 100% sudden load change]	
Ripple Ep-p		mV	80max. 120max.	
Ripple noise Ep-p		mV	150max. 290max.	
Start up time		ms	700typ.	
Hold up time		ms	15typ./10min.[100V input], 25typ./20min.[120V input]	
Accessory equipment				
Operation indicator		None		
Overvoltage protection		Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.		
Overcurrent protection		28W min. total power type		
Remote ON-OFF		None		
Remote sensing		None		
Current balance		None		
Output voltage external variable function		None		
Standards				
Safety standards		UL1950, CSA C22.2 No.234, EN60950 (TÜV) approved.		
Noise terminal voltage		FCC class B, VDE0871 class B compliant.		
Construction				
External dimensions H×W×L		mm	35×80×100	
Weight		g	220max.	
Mounting method		Can be attached to 1 side.		
Case and cover		None		
Input and output cables		Sold separately(Part No.:4EU30B217)		

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Load variation was determined only for the measured output. The non-measured output was kept fixed(1.5A for V₁, 1.5A for V₂).*3 Normal output voltages might possibly not be maintained if outputs V₁, V₂ fall below these minimum current values.

*4 Load current should exceed 1.5A at +12V for time intervals no longer than 10s. The effective current should be kept below 1.5A.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-135	
Output voltage, current*1	V1	+5V • 2A	
	V2	+12V • 1.5A[Peak 2.5A, 3s max.]*4	
Maximum output power	W	28	
Input requirements			
Input voltage Eac	V	90 to 264	
Input frequency	Hz	47 to 66[Single phase]	
Input current	A	0.8max./0.5max.[100-120/200-240V]	
Fuse rating	A	2[Internal]	
Surge current	A	50max./100max.[100-120/200-240V, 25°C, cold start]	
Leakage current	mA	0.5max./0.75max.[100-120/200-240V]	
Efficiency	%	73typ.[100-120V]	
Output characteristics			
Output voltage	V	+5[V1]	+12[V2]
Voltage variable range	%	+5, -3	V2 varies simultaneously and in the same direction as V1.
Maximum output current*1	A	2	1.5[Peak 2.5A, 3s]*4
Minimum output current*3	A	0.5	0.3
Output setting	Voltage	V	5±0.02
conditions	Current	A	2
			1.5
	Input variation	%	1max.
	Load variation*2	%	2max.
			3max.
	Temperature variation [0 to +50°C]	%	2max.
			3max.
	Total variation	%	+4, -3max.
			±5max.
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]
	Dynamic load	%/ms	±4max./1max.[50 to 100% sudden load change]
Ripple Ep-p	mV	80max.	120max.
Ripple noise Ep-p	mV	150max.	290max.
Start up time	ms	750typ.	
Hold up time	ms	15typ./10min.[100V input], 25typ./20min.[120V input]	
Accessory equipment			
Operation indicator		None	
Overvoltage protection		Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.	
Overcurrent protection		41W min. total power type	
Remote ON-OFF		None	
Remote sensing		None	
Current balance		None	
Output voltage external variable function		None	
Standards			
Safety standards		UL1950, CSA ELECTRICAL BULLETIN No.1402C, EN60950 (TÜV) approved.	
Noise terminal voltage		FCC class B, VDE0871 class B compliant.	
Construction			
External dimensions H×W×L	mm	35×80×120	
Weight	g	300max.	
Mounting method		Can be attached to 1 side.	
Case and cover		—	
Input and output cables		Sold separately(Part No.:4EU20B241)	

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Load variation was determined only for the measured output. The non-measured output was kept fixed(1.5A for V1, 1.5A for V2).

*3 Normal output voltages might possibly not be maintained if outputs V1, V2 fall below these minimum current values.

*4 Load current should exceed 1.5A at +12V for time intervals no longer than 10s. The effective current should be kept below 1.5A.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-140	
Output voltage, current*1	V ₁	+5V • 1A	
	V ₂	+12V • 1.7A	
Maximum output power	W	25.4	
Input requirements			
Input voltage Eac	V	90 to 264	
Input frequency	Hz	47 to 66[Single phase]	
Input current	A	0.7max./0.45max.[100-120/200-240V]	
Fuse rating	A	2[Internal]	
Surge current	A	50max./100max.[100-120/200-240V, 25°C, cold start]	
Leakage current	mA	0.5max./0.75max.[100-120/200-240V]	
Efficiency	%	73typ.	
Output characteristics			
Output voltage	V	+5[V ₁]	+12[V ₂]
Voltage variable range	%	+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .
Maximum output current*1	A	1	1.7
Minimum output current*3	A	0.2	0.3
Output setting conditions	Voltage	V	5.1±0.03
	Current	A	1
Voltage stability	Input variation	%	1max.
	Load variation*2	%	1.5max.
	Temperature variation [0 to +50°C]	%	2max.
	Total variation	%	+5, −1max.
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]
	Dynamic load	%/ms	±4max./1max.[50 to 100% sudden load change]
Ripple Ep-p	mV	80max.	120max.
Ripple noise Ep-p	mV	150max.	290max.
Start up time	ms	500typ.	
Hold up time	ms	15typ./10min.[100V input], 25typ./20min.[120V input]	
Accessory equipment			
Operation indicator		None	
Overvoltage protection		Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.	
Overcurrent protection		26W min. total power type	
Remote ON-OFF		None	
Remote sensing		None	
Current balance		None	
Output voltage external variable function		None	
Standards			
Safety standards		—	
Noise terminal voltage		FCC class B, VDE0871 class B compliant.	
Construction			
External dimensions H×W×L	mm	27×100×160	
Weight	g	300max.	
Mounting method		Can be attached to 1 side.	
Case and cover		—	
Input and output cables		Sold separately(Part No.: 4EU40B153)	

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Load variation was determined only for the measured output. The non-measured output was kept fixed(1.5A for V₁, 1.5A for V₂).*3 Normal output voltages might possibly not be maintained if outputs V₁, V₂ fall below these minimum current values.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-150			MRW-151			
Output voltage, current *1	V ₁	+5V • 2.2A(4A)*4			+5V • 2.2A(4A)*4			
	V ₂	+12V • 1.8A(2.5A)*4			+15V • 1.4A(2A)*4			
	V ₃	−12V • 0.1A(0.3A)*4			−15V • 0.1A(0.25A)*4			
Maximum output power	W	35			35			
Input requirements								
Input voltage Eac	V	90 to 264						
Input frequency	Hz	47 to 66[Single phase]						
Input current	A	1max./0.5max.[100/200V, at maximum output power]						
Fuse rating	A	2.5[Internal]						
Surge current	A	50max./100max.[100/200V, 25°C, cold start]						
Leakage current	mA	0.5max./0.75max.[100/200V, 25°C, output rating]						
Efficiency	%	70typ.			70typ.			
Output characteristics								
Output voltage	V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15[V ₂]	−15[V ₃]	
Voltage variable range	%	+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .		+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .		
Maximum output current*1	A	4	2.5	0.3	4	2	0.25	
Rated output current	A	2.2	1.8	0.1	2.2	1.4	0.1	
Minimum output current*2	A	1	0.6	0	1	0.5	0	
Output setting Voltage	V	5±0.02	—	—	5±0.02	—	—	
conditions Current	A	2.2	1.8	0.1	2.2	1.4	0.1	
Overvoltage threshold	V	5.8 to 6.9			5.8 to 6.9			
Voltage stability	Input variation	%	1typ.	1typ.	1typ.	1typ.	1typ.	
	Load variation*3	%	3typ.	5typ.	3typ.	5typ.	1typ.	
	Temperature variation [0 to +50°C]	%	2typ.	2typ.	1typ.	2typ.	2typ.	
	Total variation	%	+4, −2max.	±5max.	±6max.	+4, −2max.	+3, −8max. ±6max.	
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]					
	Dynamic load	%/ms	±4max./2max.[50 to 100% sudden load change]					
Ripple Ep-p	mV	50max.	80max.	30max.	80max.	120max.	30max.	
Ripple noise Ep-p	mV	150max.	290max.	290max.	150max.	350max.	350max.	
Start up time	ms	600max.[25°C, input and output ratings]			530max.[25°C, input and output ratings]			
Rise time	ms	20max.[25°C, input and output ratings]			10max.[25°C, input and output ratings]			
Hold up time	ms	15min.[25°C, input and output ratings]			15min.[25°C, input and output ratings]			
Accessory equipment								
Operation indicator		None						
Overvoltage protection		Only 5V built-in protection, voltage shielding type, recovers upon reset (interval approx. 45s).						
Overcurrent protection		36W min. total power type						
Remote ON-OFF		None						
Remote sensing		None						
Standards								
Safety standards		UL1950, CSA C22.2 No.234(MRW-151: CSA EB No.1402C), EN60950 (TÜV) approved.						
Noise terminal voltage		FCC class B, VDE0871 class B compliant.						
Construction								
External dimensions H×W×L	mm	30×100×160						
Weight	g	350max.						
Mounting method		1 side(Open frame)						
Case and cover		Frame/cover sold separately(Part No.: 2JF00B157/2JC0ZB156)						
Input and output cables		Sold separately(Part No.:4EU40B153)						

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V2, V3 fall below V1 minimum current values.

*3 Load range

V1:1 to 2.2A, V2:0.6 to 1.8A, V3:0 to 0.1A

*4 At the maximum output current value within the parentheses, the sum of all output(V1,V2 and V3) power values can not exceed this maximum output power.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-160			MRW-161			
Output voltage, current*1	V ₁	+5V • 5A(6A)*4			+5V • 5A(6A)*4			
	V ₂	+12V • 2A(2.5A)*4			+15V • 1.5A(2A)*4			
	V ₃	−12V • 0.1A(0.5A)*4			−15V • 0.1A(0.4A)*4			
Maximum output power	W	50			50			
Input requirements								
Input voltage Eac	V	90 to 264						
Input frequency	Hz	47 to 66[Single phase]						
Input current	A	1.3max./0.8max.[100-120/200-240V]						
Fuse rating	A	3[Internal]						
Surge current	A	50max./100max.[100-120/200-240V, 25°C, cold start]						
Leakage current	mA	0.5max./0.75max.[100-120/200-240V]						
Efficiency	%	75typ.			73typ.			
Output characteristics								
Output voltage	V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15[V ₂]	−15[V ₃]	
Voltage variable range	%	+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .		+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .		
Maximum output current*1	A	6	2.5	0.5	6	2	0.4	
Rated output current	A	5	2	0.1	5	1.5	0.1	
Minimum output current *2	A	1	0.6	0	1	0.5	0	
Output setting conditions	Voltage	V	5±0.02	—	—	5±0.02	—	
	Current	A	2.5	2	0.1	2.5	1.5	
Voltage stability	Input variation	%	2max.	2max.	1max.	2max.	1max.	
	Load variation*3	%	4max.	2max.	1max.	4max.	2max.	
	Temperature variation [0 to +50°C]	%	2max.	2max.	1max.	2max.	2max.	
	Total variation	%	±4max.	+6, −4max.	±6max.	±4max.	+8, −2max.	
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]					
	Dynamic load	%/ms	±4max./1max.[50 to 100% sudden load change]					
Ripple Ep-p	mV	80max.	80max.	30max.	80max.	80max.	30max.	
Ripple noise Ep-p	mV	150max.	290max.	290max.	150max.	350max.	350max.	
Start up time	ms	500typ.						
Hold up time	ms	30typ./20min.						
Accessory equipment								
Operation indicator		None						
Overvoltage protection		Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.						
Overcurrent protection		60W min. total power type						
Remote ON-OFF		None						
Remote sensing		None						
Current balance		None						
Output voltage external variable function		None						
Standards								
Safety standards		UL1950, CSA ELECTRICAL BULLETIN No.1402C, EN 60950 (TÜV) approved.						
Noise terminal voltage		FCC class B, VDE0871 class B compliant.						
Construction								
External dimensions H×W×L	mm	38×100×160						
Weight	g	500max.						
Mounting method		Can be attached to 1 side.						
Case and cover		Frame/cover sold separately (Part No.: 2JF00B167/2JC0ZB166)						
Input and output cables		Sold separately(Part No.: 4EU40B153)						

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V2, V3 fall below V1 minimum current values.

*3 Load variation will be specified from the minimum output current to the rated output current range.

*4 At the maximum output current value within the parentheses, the sum of all output(V1,V2 and V3) power values can not exceed this maximum output power.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-170			MRW-171			
Output voltage, current*1	V ₁	+5V • 5A(7A)*4			+5V • 5A(7A)*4			
	V ₂	+12V • 1.7A(2.5A)*4			+15.8V • 1.3A(2A)*4			
	V ₃	−12V • 1.7A(2.5A)*4			−15.8V • 1.3A(2A)*4			
Maximum output power	W	65			65			
Input requirements								
Input voltage Eac	V	85 to 264						
Input frequency	Hz	47 to 66[Single phase]						
Input current	A	1.7max./0.9max.[100/200V]						
Fuse rating	A	3.15[Internal]						
Surge current	A	50max./100max.[115/230V, 25°C, cold start]						
Leakage current	mA	0.5max./0.75max.[115/230V, 25°C, output rating]						
Efficiency	%	70typ.			70typ.			
Output characteristics								
Output voltage	V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15.8[V ₂]	−15.8[V ₃]	
Voltage variable range	V	—						
Maximum output current*1	A	7	2.5	2.5	7	2	2	
Rated output current	A	5	1.7	1.7	5	1.3	1.3	
Minimum output current*2	A	0.8	0.3	0.3	0.8	0.3	0.3	
Output setting Voltage	V	5±0.02	—	—	5±0.02	—	—	
conditions Current	A	5	1.7	1.7	5	1.3	1.3	
Overvoltage threshold	V	5.8 to 6.9			5.8 to 6.9			
Voltage stability	Input variation	%	1typ.	1typ.	1typ.	1typ.	1typ.	
	Load variation*3	%	3.5typ.	5typ.	5typ.	3.5typ.	5typ.	
	Temperature variation [0 to +50°C]	%	2typ.	3.5typ.	3.5typ.	2typ.	3.5typ.	
	Total variation	%	±4max.	+8, −7max.	+8, −7max.	±4max.	+8, −7max.	
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]					
	Dynamic load	%/ms	±4max./0.5max.[50 to 100% sudden load change]					
Ripple Ep-p	Source	mV	30max.	30max.	30max.	30max.	30max.	
	Switching	mV	50max.	50max.	50max.	50max.	50max.	
Ripple noise Ep-p	mV	150max.	250max.	250max.	150max.	250max.	250max.	
Start up time	ms	600typ.[115V]						
Hold up time	ms	20typ./15min.[115V]						
Accessory equipment								
Operation indicator		None						
Overvoltage protection		Only 5V built-in protection, voltage shielding type, recovers upon reset.						
Overcurrent protection		66W min. total power type						
Remote ON-OFF		None						
Remote sensing		None						
Standards								
Safety standards		UL1950, CSA C22.2 No.234, EN60950 (TÜV) approved.						
Noise terminal voltage		FCC class B, VDE0871 class B compliant.						
Construction								
External dimensions H×W×L	mm	38×100×160						
Weight	g	450max.						
Mounting method		1 side(Open frame)						
Case and cover		—						
Input and output cables		—						

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V2, V3 fall below V1 minimum current values.

*3 Load variation will be specified from the minimum output current to the rated output current range.

*4 At the maximum output current value within the parentheses, the sum of all output(V1, V2 and V3) power values can not exceed this maximum output power.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-350			MRW-351			MRW-352			
Output voltage, current *1	V ₁	+5V • 3A			+5V • 3A			+3.3V • 4A			
	V ₂	+12V • 2A			+15.6V • 1.6A			+12V • 2A			
	V ₃	−12V • 0.1A			−15V • 0.1A			−12V • 0.1A			
Maximum output power	W	40			40			40			
Input requirements											
Input voltage Eac	V	90 to 264									
Input frequency	Hz	47 to 66[Single phase]									
Input current	A	0.9max./0.55max.[100/240V]									
Fuse rating	A	2[Internal]									
Surge current	A	50max./100max.[115/230V, 25°C, cold start]									
Leakage current	mA	0.5max./0.75max.[115/230V, 25°C, output rating]									
Efficiency	%	70typ.									
Output characteristics											
Output voltage	V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15.6[V ₂]	−15[V ₃]	+3.3[V ₁]	+12[V ₂]	−12[V ₃]	
Voltage variable range	V	—									
Maximum output current *1	A	3	2	0.1	3	1.6	0.1	4	2	0.1	
Minimum output current*2	A	0.5	0.3	0	0.5	0.3	0	0.5	0.3	0	
Output setting Voltage	V	5±0.02	—	—	5±0.02	—	—	3.3±0.02	—	—	
conditions Current	A	3	2	0	3	1.6	0	4	2	0	
Overvoltage threshold	V	5.8 to 6.9			5.8 to 6.9			5.8 to 6.9			
Voltage stability	Input variation	%	1typ.	1typ.	1typ.	1typ.	1typ.	1typ.	1typ.	1typ.	
	Load variation*3	%	2typ.	4typ.	1typ.	2typ.	4typ.	1typ.	2typ.	4typ.	
	Temperature variation [0 to +50°C]	%	2typ.	3.5typ.	1typ.	2typ.	3.5typ.	1typ.	2typ.	3.5typ.	
	Total variation	%	±3.5max.	±7max.	±7max.	±3.5max.	±7max.	±7max.	±4max.	+10, −5max.	
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]								
	Dynamic load	%/ms	±4max./0.5typ.[50 to 100% sudden load change]								
Ripple Ep-p	Source	mV	30max.	100max.	10max.	30max.	120max.	10max.	30max.	100max.	
	Switching	mV	25max.	20max.	20max.	25max.	20max.	20max.	25max.	20max.	
Ripple noise Ep-p	mV	150max.	250max.	250max.	150max.	250max.	250max.	200max.	250max.	250max.	
Start up time	ms	500typ.[120V]									
Hold up time	ms	20typ./15min.[120V]									
Accessory equipment											
Operation indicator		None									
Overvoltage protection		Only 5V built-in protection, voltage shielding type, recovers upon reset.									
Overcurrent protection		41W min. total power type									
Remote ON-OFF		None									
Remote sensing		None									
Standards											
Safety standards		UL1950, CSA C22.2 No.234, EN60950 (TÜV) approved.									
Noise terminal voltage		FCC class B, VDE0871 class B compliant.									
Construction											
External dimensions H×W×L	mm	36.75×76×127									
Weight	g	240max.									
Mounting method		1 side(Open frame)									
Case and cover		—									
Input and output cables		—									

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V₂, V₃ fall below V₁ minimum current values.

*3 Load variation will be specified from the minimum output current to the rated output current range.

Power Supplies


AC Input

Multi Output, General-Purpose

MRW Series


TERMINAL DESIGNATIONS AND FUNCTIONS

MRW-130

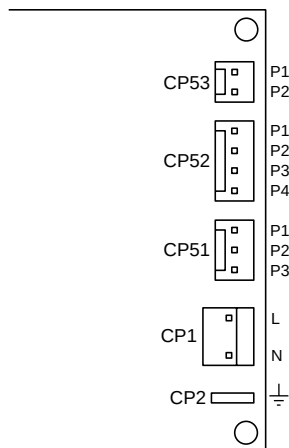


CP1	2	Input(L)
	1	Input(N)
CP2	1	FG
CP51	P1	$\bar{A} $
	P2	COMMON
	P3	V ₂
CP52	P1	COMMON
	P2	V ₂
	P3	COMMON
CP53	P1	COMMON
	P2	V ₂
	P3	COMMON

MRW-135

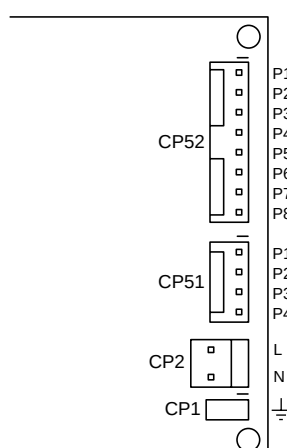


CP1	1	FG
	2	Input(L)
CP2	1	Input(N)
CP51	P1	V ₂
	P2	COMMON
	P3	V ₁
	P4	COMMON
CP52	P1	COMMON
	P2	COMMON
	P3	V ₁
	P4	V ₁
	P5	COMMON
	P6	COMMON
	P7	V ₂
	P8	V ₂

MRW-140

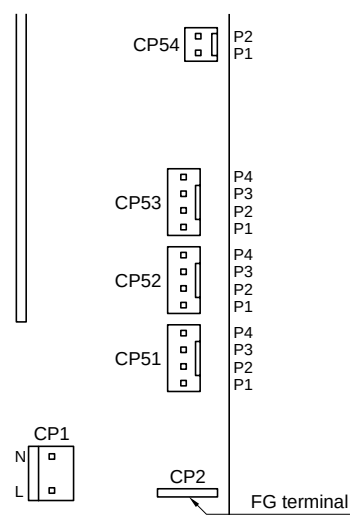

CP1	2	Input(L)
	1	Input(N)
CP2	1	FG
CP51	P1	V ₁
	P2	COMMON
	P3	V ₂
CP52	P1	V ₁
	P2	COMMON
	P3	V ₂
CP53	P1	V ₁
	P2	COMMON
	P3	V ₂
CP54	P1	COMMON
	P2	POWER OK SIGNAL
	P3	V ₂

MRW-150, 151, 160, 161

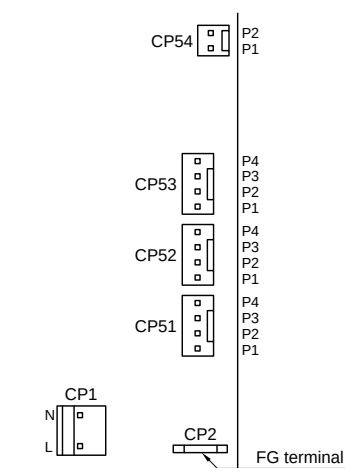

CP1	1	Input(L)
	2	Input(N)
CP2	1	FG
CP51	P1	V ₁
	P2	COMMON
	P3	V ₂
CP52	P1	V ₁
	P2	COMMON
	P3	V ₂
CP53	P1	V ₁
	P2	COMMON
	P3	V ₂
CP54	P1	COMMON
	P2	POWER OK SIGNAL
	P3	V ₂


Power Supplies

AC Input
Multi Output, General-Purpose

MRW Series


TERMINAL DESIGNATIONS AND FUNCTIONS

MRW-170, 171

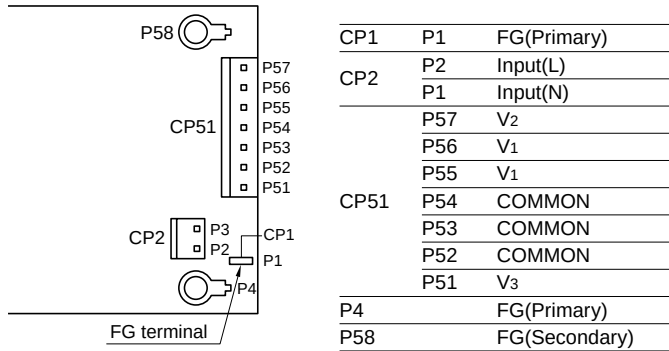

- AC input terminals(L, N)
Connect to AC.100/120V or 200/240V single phase power supply.
- Frame ground terminal(G)
Connect to earth ground. This is connected to the case.
- DC output terminals(V₁, V₂, V₃)
Wire to loads.

MRW-350, 351, 352

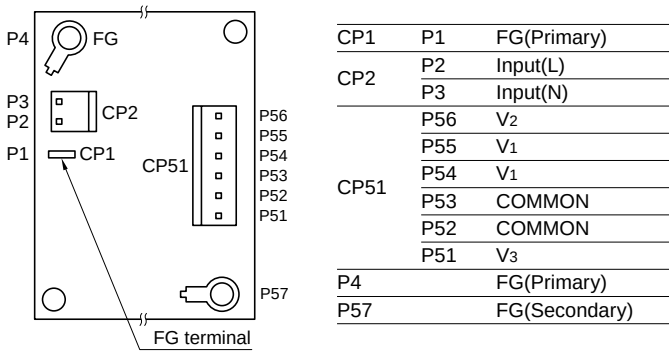

- DC output common terminal(COMMON)
Wire to loads.
- Power OK signal output terminal(POWER OK SIGNAL)
Signal is output when +5V output voltage exceeds 4.5V(applyes to MRW-140, MRW-150, MRW-151, MRW-160 and MRW-161).

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382