

**OL3901W****1310 nm SMT Bidirectional Transmission Module with Single Mode Fiber****GENERAL DESCRIPTION**

The OL3901W surface mount type PLC module has a function of a 1.3 $\mu$ m bidirectional transmission. The PLC module consists of a spot-size converted laser diode (SSC-LD: InGaAsP/InP), a side-illuminated mirror photo diode (MPD:InGaAsP), a monitor MPD, a preamplifier, a pigtail type single mode fiber, a planar lightwave circuit (PLC) and a silicon substrate.

**ABSOLUTE MAXIMUM RATINGS**

(Ta = 25°C, unless otherwise noted)

Parameter	Symbol	Rating	Unit
Fiber Output Power	PF	2	mW
Laser Diode Reverse Voltage	VR (LD)	2	V
Photo Diode Forward Current	IF	10	mA
Photo Diode Forward Voltage	VR (PD)	15	V
Operating Temperature	Ta	-30 to +75	°C
Storage Temperature	Tstg	-40 to +85	°C
Lead Soldering Temperature (10 sec)	Tsid	260	°C

## OPTICAL AND ELECTRICAL CHARACTERISTICS

(Ta = -30 to 75°C, unless otherwise specified)


Parameter		Conditions	Min	Typ	Max	Unit	
Transmitter	Fiber Output Power	Pf	CW	1.25		mW	
	Threshold Current	I <sub>th</sub>	—		35	mA	
	Center Wavelength	λ <sub>c</sub>	Pf = 1.25 mW, RMS	1270		1350	nm
	Spectral Width	Δλ	Pf = 1.25 mW, RMS(σ)		3	8	nm
	LD Forward Voltage	V <sub>op</sub>	Pf = 1.25 mW			1.45	V
	LD Forward Current	I <sub>op</sub>	Pf = 1.25 mW			80	mA
	Current above threshold	I <sub>p</sub>	Pf = 1.25 mW, I <sub>p</sub> = I <sub>op</sub> - I <sub>th</sub>			45	mA
	Rise and Fall times	t <sub>r</sub> , t <sub>f</sub>	Pf = 1.25 mW			1	ns
	Monitor Current	I <sub>m</sub>	Pf = 1.25 mW		100		μA
	Monitor Dark Current	I <sub>d</sub>	V <sub>r</sub> = 1.6 V, Ta = 25°C			22	nA
	Tracking Error	E <sub>r</sub>	I <sub>m</sub> = const. Pf = 1.25 mW, Ta = 25°C	-1.0		1.0	dB
Receiver	Power Supply Voltage	V <sub>cc</sub>	—	3.0	3.3	3.6	V
	Responsivity	Re	Pin = -21dBm, V <sub>cc</sub> = 3.3V	11			kV/W
	Output Bias Voltage	V <sub>b</sub>	Pin = 0 W, V <sub>cc</sub> = 3.3 ± 0.01 V, T <sub>c</sub> = 25°C,	1.66	1.69	1.72	V
	Trans impedance	Z <sub>t</sub>	—		92		dBΩ
	Rise and Fall times	t <sub>r</sub> , t <sub>f</sub>	Pin = -21 dBm		8	10	ns
			Pin = -14 dBm		8	10	ns
	Receive Wavelength	λ <sub>r</sub>	Pin = -21 dBm	1270		1350	nm
Isolation Loss	I <sub>so</sub>	λ = 1530 to 1570 nm λ = 1640 to 1670 nm	25			dB	
Optical Return Loss	ORL	λ = 1270 to 1350 nm	(18)	20		dB	

**CONNECTOR AND FIBER SPECIFICATIONS**

Parameter	Specifications	Unit
Type	SM	—
Mode Field Diameter	9 ±1	μm
Code Diameter	0.9	mm
Bending Radius	20 (min)	mm
Length	Options	—
Connector	FC, SC, MUJ, etc.	—
Color	Yellow	—

**OUTLINE DRAWING**

All dimensions in millimeters  
 Package No. (Unit: mm)

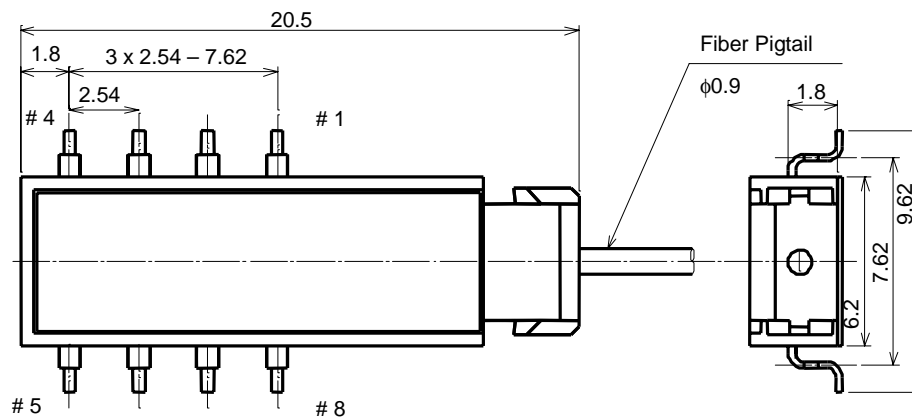

No.	Function
1	LD Anode/COM
2	V <sub>CC</sub>
3	GND
4	V <sub>OUT</sub>
5	Monitor PD Cathode
6	Monitor PD Anode
7	LD Cathode
8	LD Anode

**NOTICE**

1. The information contained herein can change without notice owing to product and/or technical improvements. Before using the product, please make sure that the information being referred to is up-to-date.
2. The outline of action and examples for application circuits described herein have been chosen as an explanation for the standard action and performance of the product. When planning to use the product, please ensure that the external conditions are reflected in the actual circuit, assembly, and program designs.
3. When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges including, but not limited to, operating voltage, power dissipation, and operating temperature.
4. Oki assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters beyond the specified maximum ratings or operation outside the specified operating range.
5. Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of the product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.
6. The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property, or death or injury to humans. Such applications include, but are not limited to, traffic and automotive equipment, safety devices, aerospace equipment, nuclear power control, medical equipment, and life-support systems.
7. Certain products in this document may need government approval before they can be exported to particular countries. The purchaser assumes the responsibility of determining the legality of export of these products and will take appropriate and necessary steps at their own expense for these.
8. No part of the contents contained herein may be reprinted or reproduced without our prior permission.

Copyright 2000 Oki Electric Industry Co., Ltd.